

# Switch Modules – ESM & DSM

The single switch module ESM and the double switch module DSM are ready-to-install units, consisting of:

- Switches: K12 (for both ESM or DSM) K12G (DSM only with two switching-points) PVA1H4 (ESM only)
- PC board
- Rubber cap
- Optional cable or connector

The rubber cap offers the possibility to use both switch modules under severe ambient conditions where dust, water, oil, solvents etc. can effect or destroy the function of standard switches.

With the rubber cap the two modules are sealed to IP 65 when mounted.

### **Typical Applications**

- Tractors



Technical Data						
Cap Material		Silicone rubber				
Protection Level		IP 65 (with cap when mounted)				
Cable		FLK/FLY 0.5 mm <sup>2</sup>				
Switches		K12 K12G PVA1H4	(both ESM or DSM) (DSM only, two switching-points) (ESM only)			
	Operating force	Travel (mm/inch)				
K12	5 N	1 / 0.03	39			


Evemble			DGM	K12	4	5NI	)	1 120	D.
ering code			1	2	3	4	6	7	8
ı		011		_ , 0.					
industrial controls	PVA1H4	3 N	2 :	2 / 0.	ეგ7				
Industrial controls	K12G	3.5 / 7 N	1.5	5 / 0.	0591				
Harvesting equipment	K12	5 N	1	/ 0.	039				
Tractors		Torce							

Ordering code		1	2	3	4	6	7	8	
	Exam ple Exam ple	DSM	K12	1	5N	С	L130	Pu Po	
1 Designation	ESM = single switch module	1	1	1	1	T T	Ť	Î	
	DSM = double switch module								
2 Switch	K12 = (for ESM and DSM)								
	K12G = with 2 switching-points (DSM only)								
	PVA = PVA1H4 (ESM only)								
3 Travel of Switch	1 = 1  mm (K12)								
	1.5 = 1.5  mm (K12G)								
	2.2 = 2.2  mm (PVA1H4)								
4 Operating force	5N = 5 N (K12)								
	3.5N = 3.5 / 7 N (K12G)								
	3N = 3 N (PVA1H4)								
6 Cap	N = none								
	C = with cap								
7 Cable	- = none								
	L130 = 130 mm cable length								
8 Cap decals (DSM)*	- = none								
	P = arrows:								
	U (down), O (Up), L (left), R (right)								


<sup>\*</sup> see drawing overleaf

# DeltaTech Single & Double Switch Modules – ESM / DSM

# ESM single switch with K12

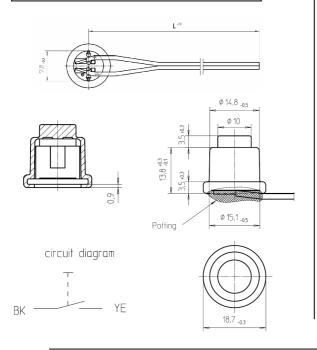


## ESM single switch with PVA1H4











# **DSM** double switch module with K12









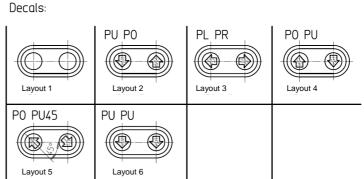



# DeltaTech Single & Double Switch Modules – ESM / DSM

**DeltaTech Controls** – A CoActive Technologies Company - worldwide Facilities With sales offices and manufacturing facilities located worldwide, please visit our website at www.deltatechcontrols.com for a complete listing and to find the office nearest to you.

#### **France**

2 Boulevard Michael Faraday Arlington Square, Batiment B Serris - F77716 Marne La Vallee Cedex 4 France

phone: + 33 160 24 51 51 + 33 (0)3 84 69 08 97 fax:

#### Germany

Holzhauser Strasse 26-32 D-13509 Berlin Germany

phone: +49 30 43 999 0 fax: + 49 30 43 999 203

#### **Hong Kong**

Unit 901, West Tower Shun Tak Center 168-200 Connaught Road Central, Hong Kong phone: +852 2732 2720

fax: +852 2732 2919

### USA

5288 Valley Industrial Blvd. S Shakopee, MN 55379 **USA** 

phone: + 1 952 403 7418 + 1 952 233 9707



No information and data contained in this publication shall be construed to create any liability on the part of DeltaTech Controls GmbH. Any new issue of this publication shall automatically invalidate and supersede any and all previous issues. Dimensions are subject to change without prior notice.

All Copyrights belong to DeltaTech Controls GmbH and CoActive Technologies. All other trademarks or registered trademarks are property of their respective owners. All data subject to change without notice. ©2007