

FEATURES

General

- HDMI 1.4a features supported
- 3D video support
- Extended colorimetry
- De-interlacer operates from 480i to 1080i with no external memory required
- CEC controller and buffer reduces system overhead
- Compatible with DVI v.1.0
- Optional embedded HDCP keys to support HDCP 1.3
- Single 1.8 V supply
- Video/audio inputs accept logic levels from 1.8 V to 3.3 V

Digital video

- 150 MHz operation supports all video and graphics resolutions from 480i to 1080p
- De-interlacer requires no external memory
- Programmable 2-way color space converter
- Supports RGB, YCbCr, and DDR
- Supports ITU656-based embedded syncs
- Auto input video format timing detection (CEA-861E)

Digital audio

- Supports standard S/PDIF for stereo LPCM or compressed audio up to 192 kHz

- 2-channel uncompressed LPCM I²S audio up to 192 kHz

Special features for easy system design

- On-chip MPU with I²C master to perform EDID reading and HDCP operations; reports HDMI events through interrupts and registers
- 5 V tolerant I²C and HPD I/Os, no extra device needed
- No audio master clock needed for supporting S/PDIF and I²S

APPLICATIONS

Cellular handsets

Digital video cameras

Digital still cameras

Personal media players


Gaming

DVD players and recorders

Digital set-top boxes

HDMI repeaters

FUNCTIONAL BLOCK DIAGRAM

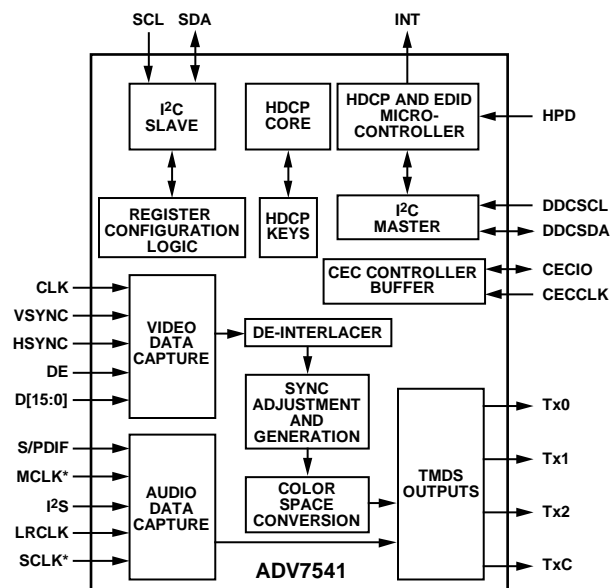

*THE SCLK SERVES AS MCLK WHEN CONFIGURED WITH S/PDIF.

Figure 1.

GENERAL DESCRIPTION

The ADV7541 is a 150 MHz, high definition multimedia interface (HDMI®) transmitter. It supports HDTV formats up to 1080p and computer graphic resolutions up to SXGA at 75 Hz.

With the optional inclusion of embedded HDCP keys, the ADV7541 allows the secure transmission of protected content, as specified by the HDCP 1.3 protocol.

The ADV7541 supports both S/PDIF and 2-channel I²S audio. Its high fidelity, 2-channel I²S can transmit stereo at up to a 192 kHz sampling rate. The S/PDIF can carry stereo LPCM audio or compressed audio including Dolby® Digital and DTS®.

The ADV7541 helps to reduce system design complexity and cost by incorporating such features as an I²C master for EDID reading and 5 V tolerance on I²C and Hot Plug™ detect pins.

Fabricated in an advanced CMOS process, the ADV7541 is available in a space-saving, 49-ball WLCSP surface-mount package. This package is RoHS compliant and specified to operate from -25°C to +85°C.

ADV7541* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

EVALUATION KITS

- ADV7541 Evaluation Board

DOCUMENTATION

Application Notes

- AN-1050: A Method for Compressing I²C Scripts for the ADV74xx/ADV75xx/ADV76xx/ADV78xx

Data Sheet

- ADV7541: Low Power HDMI/DVI Transmitter with De-Interlacer Data Sheet

REFERENCE MATERIALS

Informational

- Advantiv™ Advanced TV Solutions

DESIGN RESOURCES

- ADV7541 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all ADV7541 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

DOCUMENT FEEDBACK

Submit feedback for this data sheet.

NOTES

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.