
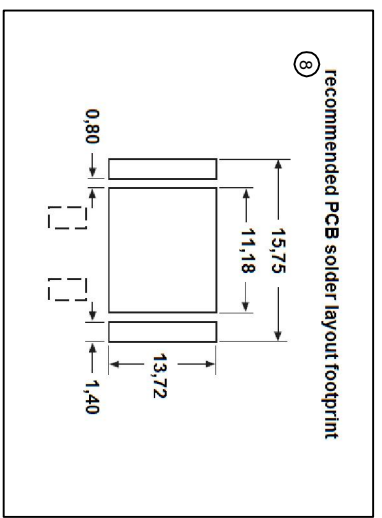


	1	2	3	4	5	6	7	
A								
B								
C								
D								
E								
F								
G	<p>RoHS compliant Unit: mm</p>							
H	<p>1 2 3 4 5 6 7</p>							

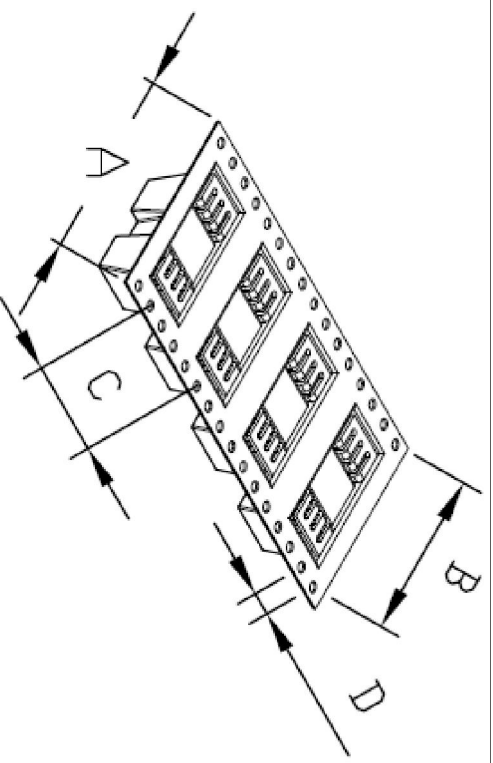

⑦ ③ Tape & Reel
1 Reel = 300PCS

A 44,0 B 40,40 C 24,0 D 4,0

Tolerances: unless otherwise specified ±0,3
Material: Copper, 06mm thick
Finished: Tin plated

Option	Packing ⑦	Thermal resistance (K/W)
-	Tape reel 300pcs/reel	23
L	Bulk 500pcs/PE bag	23

⑧	add PCB soldering layout footprint	10.04.2014	Andy				
⑦	Update the packing quantities	23.09.2013	Amy	Drawn	19.06.02	Hellwig	
⑥	Change production plant	10.03.2010	Alex	Approved	17.12.2013	Amy	
⑤	Modify drawing layout	27.07.09	N.Schulz				
④	change dimension	14.05.09	N.Schulz				
③	Update	19.06.02	N.Schulz				
Id.	Modification	Date	Name				

Customer-No.
ASSMANN WSW-No.
V-1100-SMD/A X
Drawing-No.
ASS 0518 HS
rev08
Replace Sheet