


Order code: A-MCSSP-80xxx Order color: Grey
 Order code: A-MCSSP-80xxx/x

Order color:
 R: Red
 Y: Yellow
 G: Green
 B: Blue

Length Code	Length (M)
005	0.5
010	1
020	2
030	3
050	5
070	7
100	10
150	15
200	20
300	30

Tolerance		
Length (M)	Max-M	Mix-M
0.5	0.03	0.025
1	0.04	0.035
L≥2	L x 3%	L x 3%

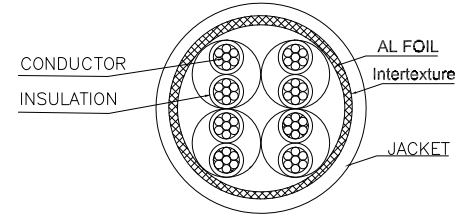

CN1	WIRE COLOR	CN2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8
SHLL	DRAIN WIRE	SHLL

Electrical
 Open/short/intermittence:100%
 The operating temperature: -20°C~+60°C
 The storage temperature: -20°C~+60°C

③	Molding PVC	2	Molding PVC 45P
②	RJ45 CONN	2	RJ45 8P8C, Two Fork gold plated contacts 3u" gold
①	CABLE	1	SFTP(26AWG*x1PR)*4+AB,PVC OD:5.3±0.3mm
NO.	NAME.	Q'TY	SPECIFICATION

RoHS compliant
 Unit: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	04.08.2017	Fred
					Approved	04.08.2017	Fred
DIM	TOL						
		①	Drawn	04.08.2017	Fred		
Angle	TOL	Id.	Modification	Date	Name		



ASSMANN WSW-No. A-MCSSP-80xxx/x	
Drawing-No. ASS 0841 CA	rev00
Replace	Sheet