


**Note for plug:**

**Material:**  
 Housing-Polycarbonate,clear.  
 Terminal-0.36[.014] thick phosphor bronze.  
 Thick gold in localized gold plate.  
 Area,Gold flash over the remainder.  
 Over 2.54mm[.000100] thick nickel underplate

**Order code: AT-S-26-4/4/X-XX/R**

**Order color:**  
 B: Black  
 W: White  
 S: Silver

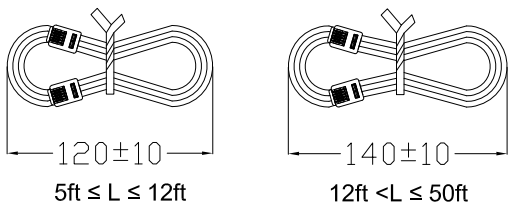

P1		P2
1	Black	1
2	Red	2
3	Green	3
4	Yellow	4

Length Code	Length (mm)
5	1525±20(5FT)
7	2135±30(7FT)
10	3050±60(10FT)
12	3660±60(12FT)
14	4270±60(14FT)
25	7625±100(25FT)
50	15250±150(50FT)

**RoHS compliant**  
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	10.08.2017	Fred	
.x	±0.50				Approved	10.08.2017	Fred	ASSMANN WSW-No. <b>AT-S-26-4/4/X-XX/R</b>
.xx	±0.20							
DIM	TOL							Drawing-No.
								<b>ASS 8060 CA</b>
Angle	±2°	Id.	Modification	Date	Name			rev00
								Replace