Single Pole Key Switches



Features/Benefits

- Positive tactile feel
- Variety of cap colors
- SPST and SPDT configurations
- RoHS compliant

Typical Applications

- Telecommunications
- Industrial
- Instrumentation

Specifications

CONTACT RATING: Q contact material: 25mA @

50V AC .or DC max.

ELECTRICAL LIFE: 100,000 actuations.

CONTACT RESISTANCE: Below 100 m Ω initial @

2-4 V DC, 100 mA

INSULATION RESISTANCE: $10^{9}\Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 65°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or

EIA RS-186E method 9 (1 hour steam aging).

Note: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

CASE: Glass filled nylon (UL 94V-0).

ACTUATOR: ABS, matte finish, black standard.

MOVABLE CONTACT: Q contact material: Stainless steel, silver plated.

STATIONARY CONTACTS AND TERMINALS: Q contact material: copper alloy, silver plated.


TERMINAL SEAL: Epoxy

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.







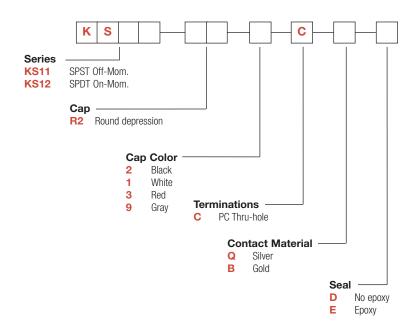





KS11 / KS12









		SWITCH FUNCTION		CONNECTED TERMINALS			
		POS. 1	POS. 2	POS. 1	POS. 2		
NO. POLES	MODEL NO.						SCHEMATIC
SP	KS11	OFF	мом.	OPEN	1–3	SPST	1 4 3
	KS12	ON	МОМ.	1–4	1–3	SPDT	1 (COMM) NC 4 • 3 NO




R2 CAP WITH ROUND DEPRESSION






OPTION CODE	CAP COLOR		
2	BLACK		
1	WHITE		
3	RED		
9	GRAY		









C PC THRU-HOLE





MULTIPLE SWITCH SPACING



CONTACT MATERIAL

TERMINATION



OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING		RATINGS
Q	SILVER ²	SILVER ²	POWER	25 mA MAX. @ 50 V AC OR DC MAX.
В	B GOLD' GOLD'		LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.

1) MOVABLE CONTACT: Stainless steel, with gold plate over nickel plate. STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

2) MOVABLE CONTACT: Stainless steel, silver plated. STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, silver plated.





E EPOXY SEAL





