



Features/Benefits

- Soft actuated switch
- Sealed front end
- Top and side actuated

Typical Applications

- Low profile keyboards
- Automotive interfaces
- Industrial control

Specification

FUNCTION: momentary action

CONTACT ARRANGEMENT: 1 make conact = SPST, N.O.

TERMINALS: THT pins

Mechanical

	Force	Operating life	Travel
Туре	(N)	(operations)	(mm)
KSF0M211LFTR	1.5 ± 0.5	100,000	0.25 ± 0.1
KSF0M311LFTR	1.9 ± 0.5	100,000	0.25 ± 0.1
KSF0M411LFTR	3.0 ± 0.75	100,000	0.25 ± 0.1
KSF0M511LFTR	5.2 ± 1.0	100,000	0.25 ± 0.1
KSFI0V91170SH LFTR	3.4 ± 1.5	100,000	0.65 ± 0.25
KSF0M212 LFT	1.6 ± 0.4	300,000	0.25 ± 0.1
KSFI0M412 70SHLFT	3.2 ± 0.8	100,000	0.75 ± 0.25

Overload resistance: 40N, 1 time Sealing: IP60 or IP67

NOTE:

Other configurations of haptics and terminals are available upon demand. Please also refer to KSF and KSFI Mk2 catalogues pages for other options.

This product is designed and manufactured for general electronic devices. For systems where reliability and safety are required, please contact your sales representative to secure product integration and function to secure usage.

Electrical	Silver	Gold
MAXIMUM POWER:	1 VA	0.2 VA
MAXIMUM VOLTAGE:	32 VDC	32 VDC
MINIMUM VOLTAGE:	20 mV	20 mV
MAXIMUM CURRENT:	50 mA	10 mA
MINIMUM CURRENT:	1 mA	1 mA

DIELECTRIC STRENGTH (50 Hz, 1 min.): > 250 Vrms

CONTACT RESISTANCE: < 100 m Ω

INSULATION RESISTANCE (100 V, initial stage): $> 10^{9} \Omega$

BOUNCE TIME: < 1 ms

EnvironmentalSilver
Gold

OPERATING TEMPERATURE: -40°C to 85°C -40°C to 125°C

STORAGE TEMPERATURE: -55°C to 85°C -40°C to 125°C

Process

SOLDERING


Packaging

In boxes of 250 pieces (V type) or 500 pieces (M type).

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

However, please note that all the combinations of these options are not feasible. For any part number different from those listed above, please consult your local representative.

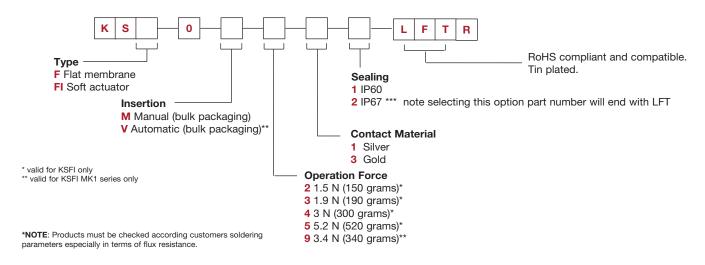





www.ckswitches.com


Tactile Switches


KSF & KSFI SeriesSoft Actuated Tact Switch

KSF











KSFI 0V







Dimensions are shown: mm Specifications and dimensions subject to change

B-83