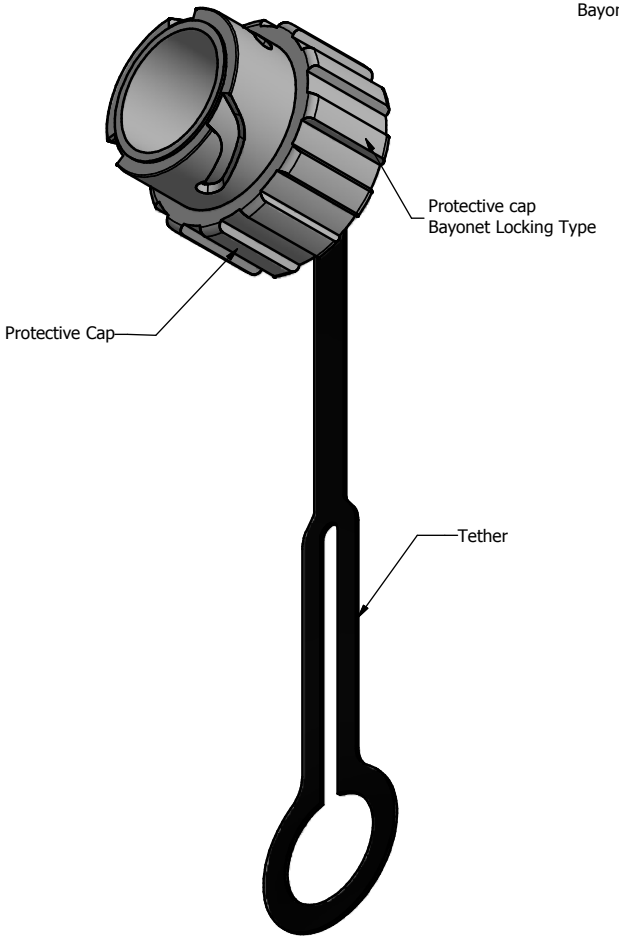

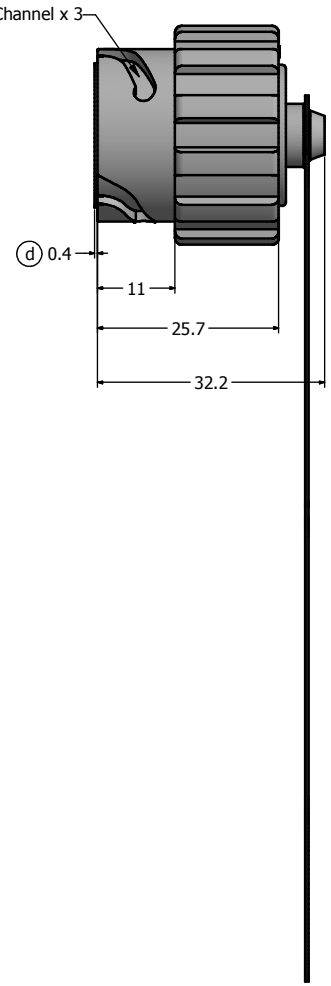

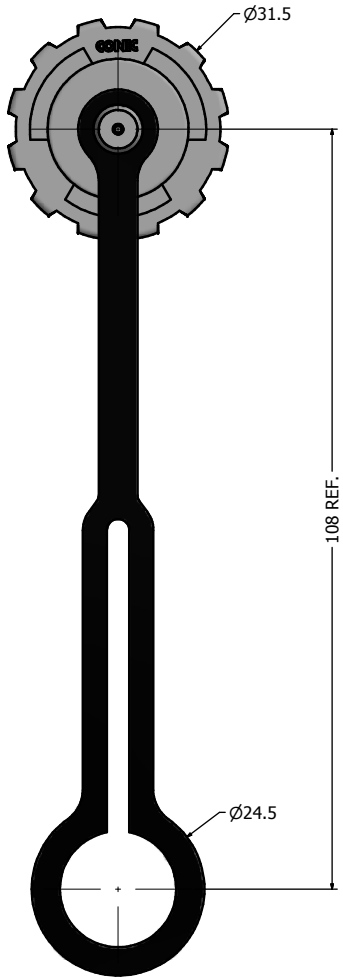

Notes:

1. Material:

(c)(b) - Protective Cap: Polyester (Black); UL94 V-0

- Tether: Polycarbonate (Black)

- Operating Temperature: -40˚C to +85˚C

(d) 3. IP67/IP68 rated when fully mated with the appropriate mating connector

RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY AND MAY NOT BE DISCLOSED TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION

DO NOT ALTER CAD DRAWING BY HAND

Rev.	Changes	Date	Name
f	1 x f	Oct/10/2017	Vincent Ke
e	2 x e	Dec/09/2015	Vincent Ke
d	1 x d	Feb/25/2013	Vincent Ke
c	1 x c	Feb/25/2011	Vincent Ke
b	1 x b	Jun/03/2010	Vincent ke
a	original		

Customer:

Name	Title	Approval Date

Tolerance
Unless otherwise specified
(d) 0 PLC ± 0.50
1 PLC ± 0.38
2 PLC ± 0.25
3 PLC ± 0.10
ANGLES ± 3˚

2008	Date	Name
Draw.	Jun. 06	Vincent Ke
Appd.	Jun. 06	J. Chaudry
Norm		
D-old		

Autodesk Inventor

CONEC®

Scale: 1.5:1 | Dim. in mm

Material: See Notes

Title: Protective cap Assembly for (f) IP67 Duplex LC, IP67 RJ45, IP67 USB and IP67 Power Connectors

Drawing No.: 17K1A004 | DIN A3

Part No.: 17-300050 | Sheet 1/1