

Technical specification:

Rated voltage: 4pos 5pos
IEC 61076-2-101 250 V 60 V

Current rating: 4 A at 40°C
IEC 61076-2-101

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +105°C

Mating cycles: >=100
IEC 60512-9a



Materials:

Contact: CuZn

Contact plating: Nickel, gold plated

Contact carrier: PA GF, UL 94, like RAL 9005

Sealing: FPM

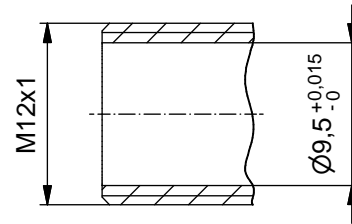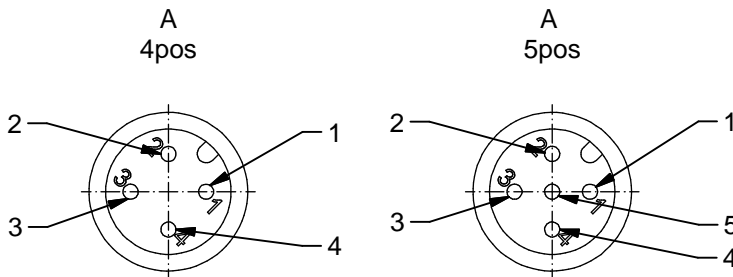

Part no:	Description:	Pos	Construction:
43-01336	SAL - 12 - ES4 - L	4	without sealing
43-01337	SAL - 12 - ES5.1 - L	5	without sealing
43-01338	SAL - 12 - ESO4 - L	4	with sealing
43-01339	SAL - 12 - ESO5.1 - L	5	with sealing

DO NOT ALTER CAD DRAWING BY HAND

Directive 2011/65/EU RoHS compliant

Index: f 07.08.13 fro Ä4867
Colour changed

dim. in mm

	date	name
drawn	13.10.08	Fromm
appd.	27.10.08	Mankopf

general tolerance: 0 ± 0,50mm
0,0 ± 0,25mm
0,00 ± 0,10mm

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

CONEC®

title:
Male socket M12x1 with soldering version

dwg no:
43K1A754

part no: