




NR-23160-000

SHT 1.1

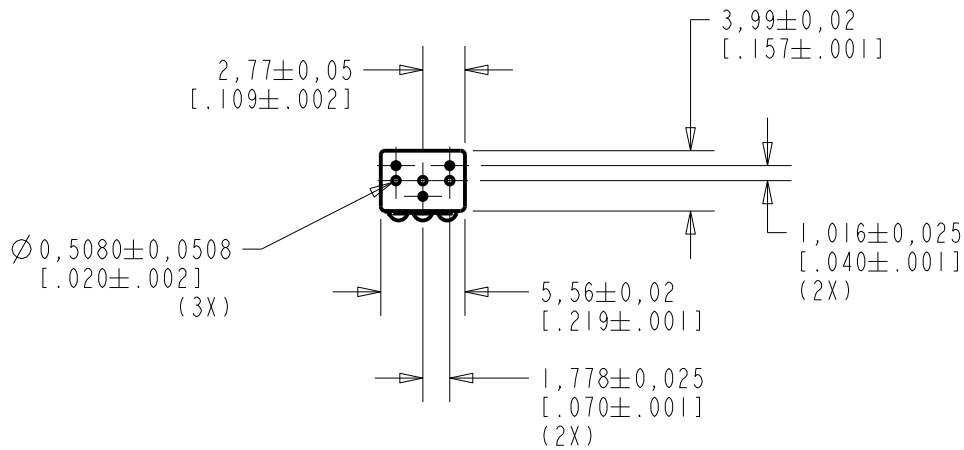

NOTE:

1. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

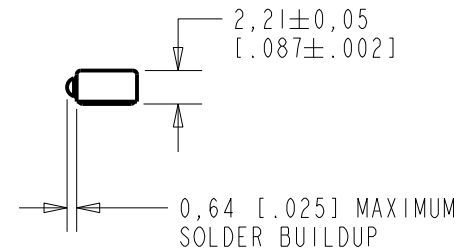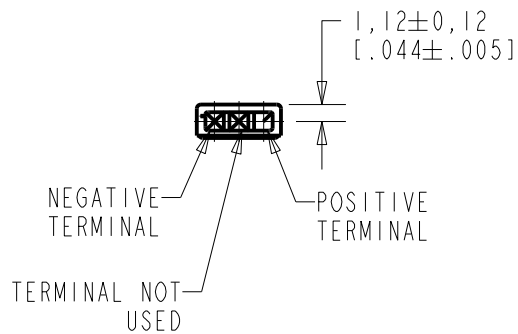

NOMINAL WEIGHT  
.13 GRAM



Ø 0,508±0,025  
[.020±.001]  
(15X)


DIMENSIONS IN MILLIMETERS [INCHES]

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Active	D
D	MI0104725	7-06-12		

SCALE:	2:1		DR. BY	DATE
DO NOT SCALE DRAWING			DMS	06/07/05
TITLE:	MICROPHONE	NR-23160-000	CK. BY	DATE
	OUTLINE DRAWING	SHT 1.1	GJP	06/09/05
			APP. BY	DATE
			GJP	06/09/05

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

NR-23160-000  
SHT 2.1

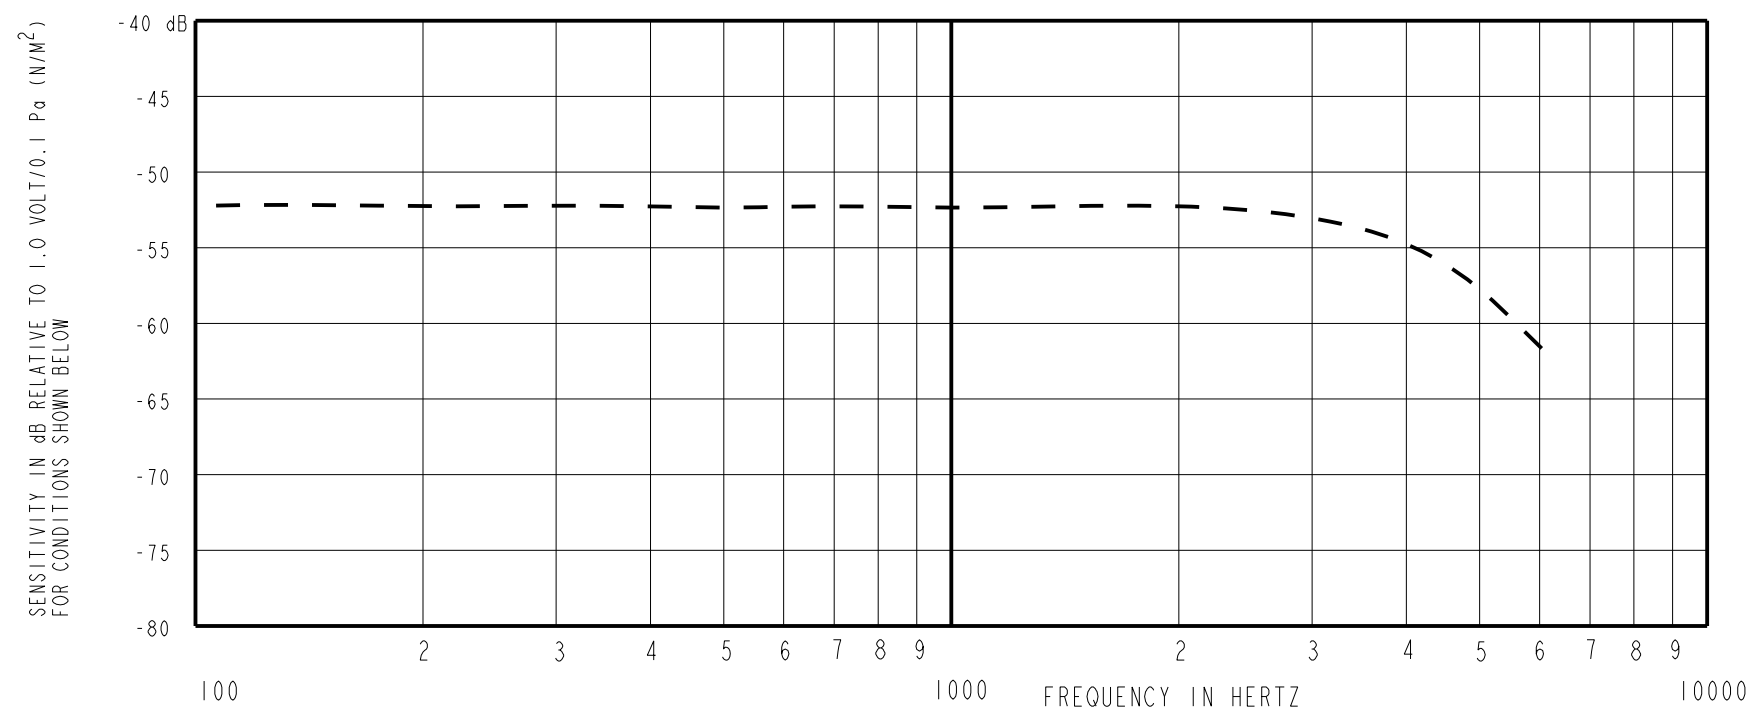


FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1 KHz	
100	---	-52.0	---	-2.0	+2.0
1000	-55.0	-52.0	-49.0	0.0	0.0
4000	---	-55.0	---	-6.0	0.0

NOTES:

- CASE CONNECTED TO NEGATIVE TERMINAL.
- MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- PRESSURE DIFFERENCE SENSITIVITY TESTED WITH REAR SOUND PORT SEALED TO AIR VOLUME OF AT LEAST 0.5 CC.

DC SUPPLY	AMPLIFIER CURRENT DRAIN	OUTPUT IMPEDANCE OHMS		
		MIN.	NOM.	MAX.
1.3V	200µA MAX.	1500	2500	3500

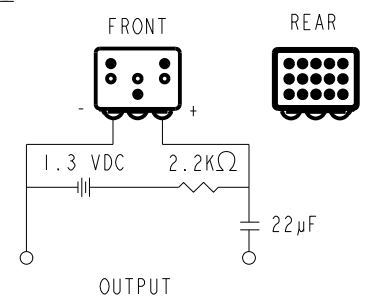

VL MODE	VL SPEC
2 WIRE	-
3 WIRE	0.15V-0.90V

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
D	MI0104725	7-06-12	Active	D

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

SCALE: 2:1	DR. BY DATE
DO NOT SCALE DRAWING	DMS 06/07/05
TITLE: MICROPHONE	CK. BY DATE
NR-23160-000	GJP 06/09/05
PERFORMANCE SPECIFICATION	APP. BY DATE
SHT 2.1	GJP 06/09/05