

LTM4676EY

Dual Step-Down μ Module Regulator with PMBus Power System Management

DESCRIPTION

Demonstration circuit 2269A-A is a dual-output, high efficiency, high density, μ Module[®] supply on a small 1.5"×1.2" PCB board with 4.5V to 26.5V input range. Each output can supply 13A maximum load current. The demo board has a [LTM[®]4676](#) μ Module regulator, which is a dual 13A or single 26A step-down regulator with PMBus power system management. The DC2269A can be easily inserted to an edge connector for testing and debugging. It has an optional input filter inductor (L1) to further reduce input ripple EMI noise.

DC2269A-A powers up to default settings and produce power based on configuration resistors without the need for any serial bus communication. This allows easy evaluation of the DC/DC converter. To fully explore the extensive power system management features of the part, download the GUI software LTpowerPlay[™] onto your PC and use

LT's I²C/SMBus/PMBus dongle DC2086A together with DC1613A to connect to the board. LTpowerPlay allows the user to reconfigure the part on the fly and store the configuration in EEPROM, view telemetry of voltage, current, temperature and fault status.

GUI Download

The software can be downloaded from:

<http://www.linear.com/ltpowerplay>

For more details and instructions of LTpowerPlay, please refer to LTpowerPlay GUI for LTM4676 Quick Start Guide.

Design files for this circuit board are available at
<http://www.linear.com/demo/DC2269A-A>

LT, LT, LTC, LTM, Linear Technology, the Linear logo and μ Module are registered trademarks and LTpowerPlay is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		4.5V to 26.5V
Output Voltage, V _{OUT0}	V _{IN} = 4.5V to 26.5V, I _{OUT0} = 0A to 13A	0.5V to 4V, Default: 1V
Maximum Output Current, I _{OUT0}	V _{IN} = 4.5V to 26.5V, V _{OUT} = 0.5V to 4V	13A
Output Voltage, V _{OUT1}	V _{IN} = 4.5V to 26.5V, I _{OUT1} = 0A to 13A	0.5V to 5.4V, Default: 1.8V
Maximum Output Current, I _{OUT1}	V _{IN} = 4.5V to 26.5V, V _{OUT} = 0.5V to 5.4V	13A
Typical Efficiency	V _{IN} = 12V, V _{OUT} = 1.8V, I _{OUT} = 13A	86.3%
Default Switching Frequency		500kHz



Figure 1. Dual-Output LTM4676/DC2269A-A Demo Circuit

dc2269aaf

QUICK START PROCEDURE

Table 1. LTM4676 Demo Cards for Up to 100A Point-of-Load Regulation

MAXIMUM OUTPUT CURRENT	NUMBER OF OUTPUT VOLTAGES	NUMBER OF LTM4676 μ MODULE REGULATORS ON THE BOARD	DEMO BOARD NUMBER
13A, 13A	2	1	DC1811A
13A, 13A	2	1	DC2269A-A
26A	1	1	DC2087A
50A	1	2	DC1989A-A
75A	1	3	DC1989A-B
100A	1	4	DC1989A-C
100A	1	1 + (3 \times LTM4620A)	DC2106A-A
130A	1	1 + (3 \times LTM4630)	DC2106A-B

DC2269A-A is easy to set up to evaluate the performance of the LTM4676EY. It can be easily inserted to an edge connector (SAMTEC MEC2-20-01-L-DV--TR) for testing and debugging. Refer to Figure 2 for the proper measurement equipment setup and follow the procedure below.


1. With power off, connect the input power supply to V_{IN} (4.5V-26.5V) and GND (input return).
2. Connect the 1.0V output load between V_{OUT} and GND (Initial load: no load).
3. Connect the 1.8V output load between V_{OUT} and GND (Initial load: no load).
4. Connect the DVMs to the input and outputs.
5. Turn on the input power supply and check for the proper output voltages. V_{OUT0} should be $1.0V \pm 1\%$, and V_{OUT1} should be $1.8 \pm 1\%$.
6. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.
7. Connect the dongle and control the output voltages from the GUI. See "LTpowerPlay GUI for the LTM4676 Quick Start Guide" for details.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 3 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (–) terminals of an output capacitor. The probe's ground ring needs to touch the (–) lead and the probe tip needs to touch the (+) lead.

Connecting a PC to DC2269A-A

You can use a PC to reconfigure the power management features of the LTM4676 such as: nominal V_{OUT} , margin set points, OV/UV limits, temperature fault limits, sequencing parameters, the fault log, fault responses, GPIOs and other functionality. The DC2086A dongle may be plugged when V_{IN} is present.

QUICK START PROCEDURE

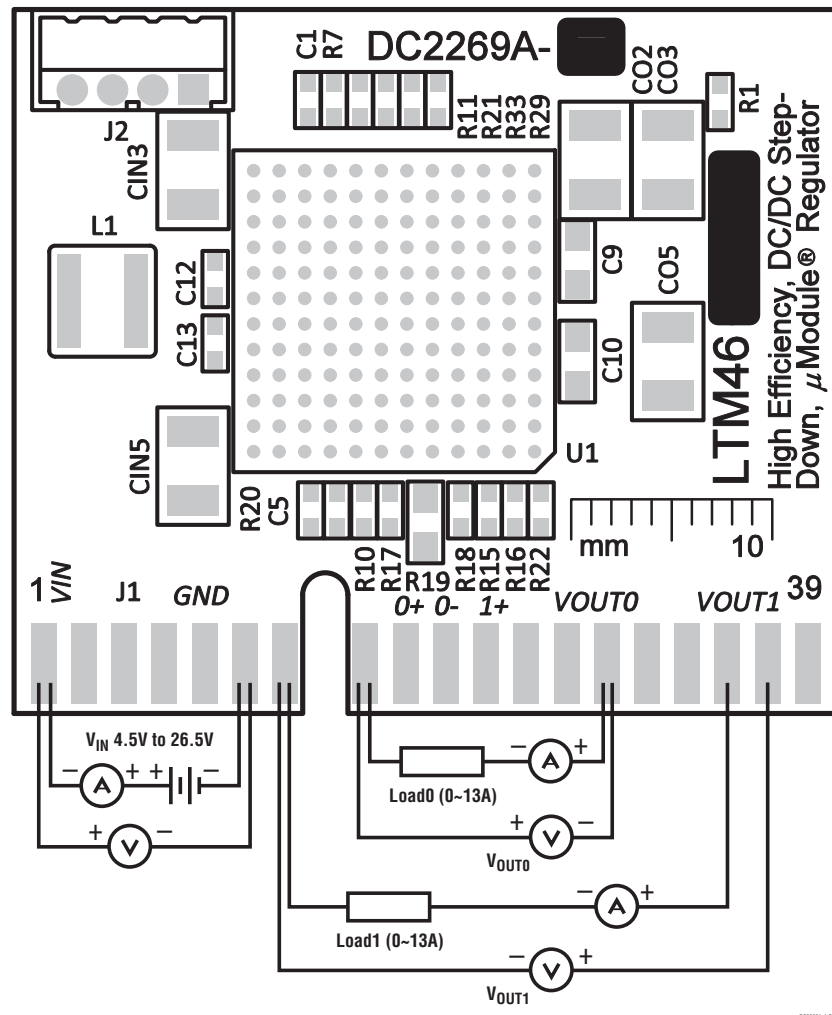

QUICK START PROCEDURE

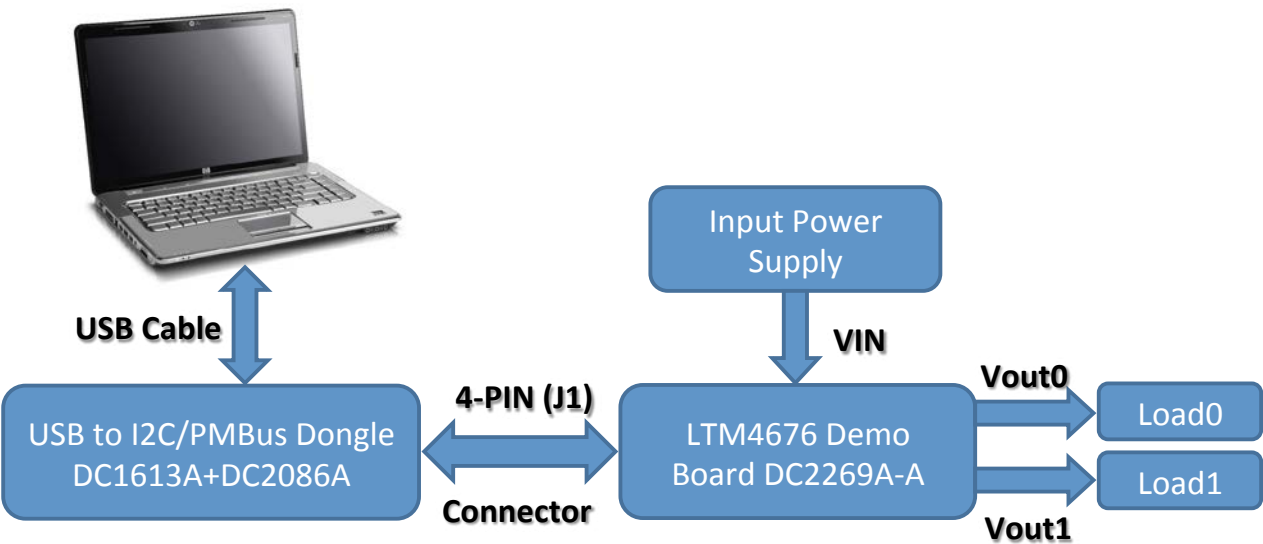


Figure 4. Demo Setup with PC

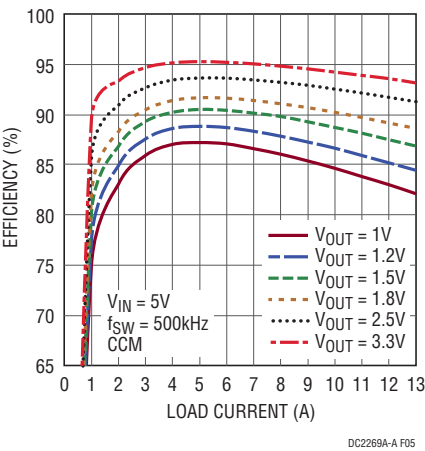


Figure 5. Efficiency vs Load Current at VIN = 5V

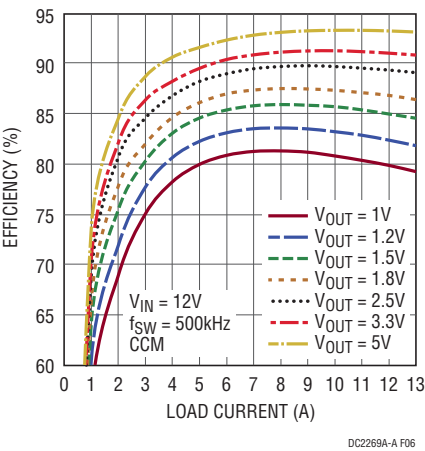


Figure 6. Efficiency vs Load Current at VIN = 12V

QUICK START PROCEDURE

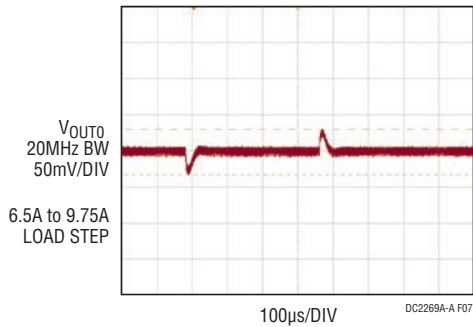


Figure 7. Output Voltage V_{OUT0} vs Load Current (V_{OUT0} RANGE = 1)

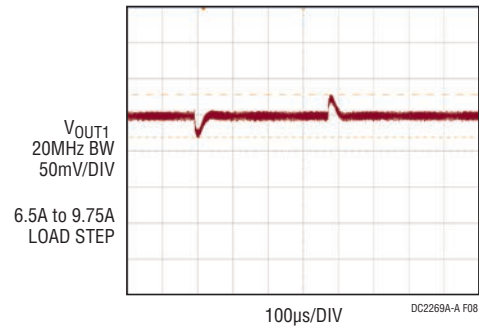


Figure 8. Output Voltage V_{OUT1} vs Load Current (V_{OUT1} RANGE = 1)

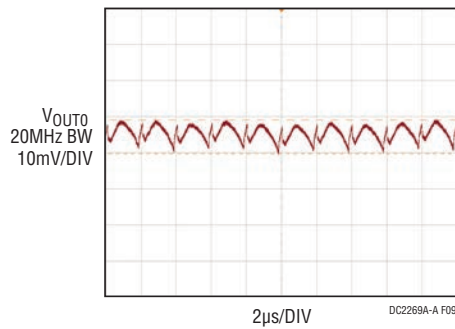


Figure 9. Output Voltage Ripple at $V_{IN} = 12V$, $V_{OUT0} = 1V$, $I_{OUT0} = 13A$

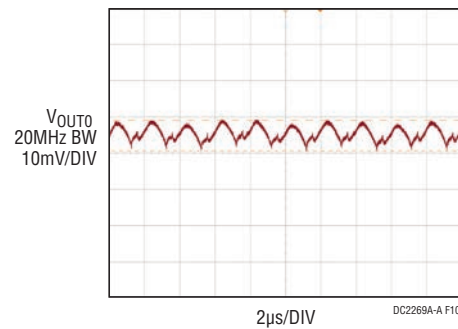


Figure 10. Output Voltage Ripple at $V_{IN} = 12V$, $V_{OUT0} = 1.8V$, $I_{OUT0} = 13A$

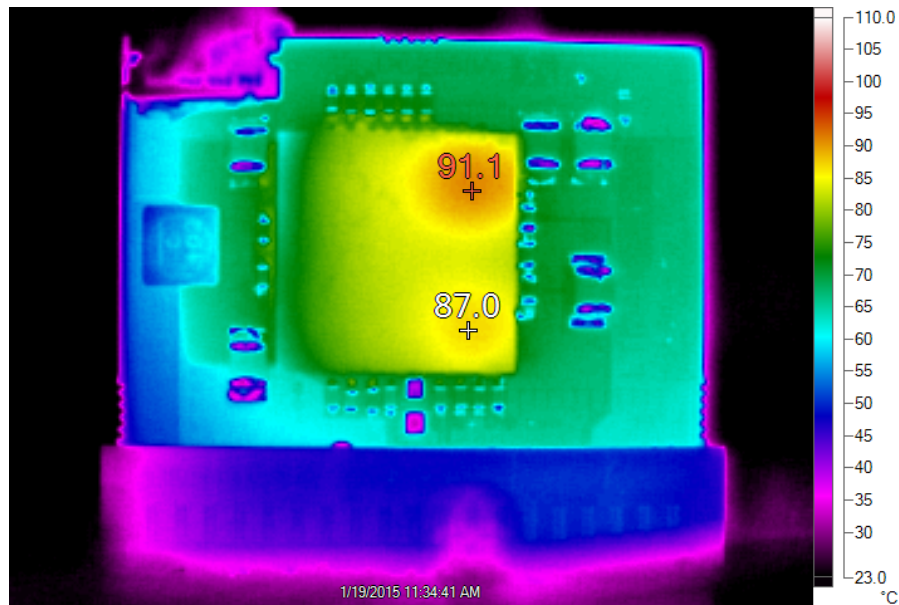


Figure 11. Thermal Performance at $V_{IN} = 12V$, $V_{OUT0} = 1V/11A$, $V_{OUT1} = 1.8V/11A$, $f_{SW} = 500kHz$, $T_A = 23^\circ C$, 200LFM Airflow

LTPOWERPLAY SOFTWARE GUI

LTpowerPlay is a powerful Windows based development environment that supports Linear Technology power system management ICs, including the LTM4675, LTM4676, LTC3880, LTC3882, LTC3883, LTC2974 and LTC2978. The software supports a variety of different tasks. You can use LTpowerPlay to evaluate Linear Technology ICs by connecting to a demo board system. LTpowerPlay can also be used in an offline mode (with no hardware present) in order to build a multichip configuration file that can be saved and reloaded at a later time. LTpowerPlay provides unprecedented diagnostic and debug features. It becomes a valuable diagnostic tool during board bring-up to program or tweak the power management scheme in a system, or to diagnose power issues when bringing up

rails. LTpowerPlay utilizes the DC1613A and DC2086A USB-to-SMBus controller to communicate with one of many potential targets, including the LTM4676, the LTC3880, LTC3882 and the LTC3883's demo system, or a customer board. The software also provides an automatic update feature to keep the software current with the latest set of device drivers and documentation. The LTpowerPlay software can be downloaded from:

<http://linear.com/ltpowerplay>

To access technical support documents for LTC Digital Power Products visit Help. View online help on the LTpowerPlay menu.

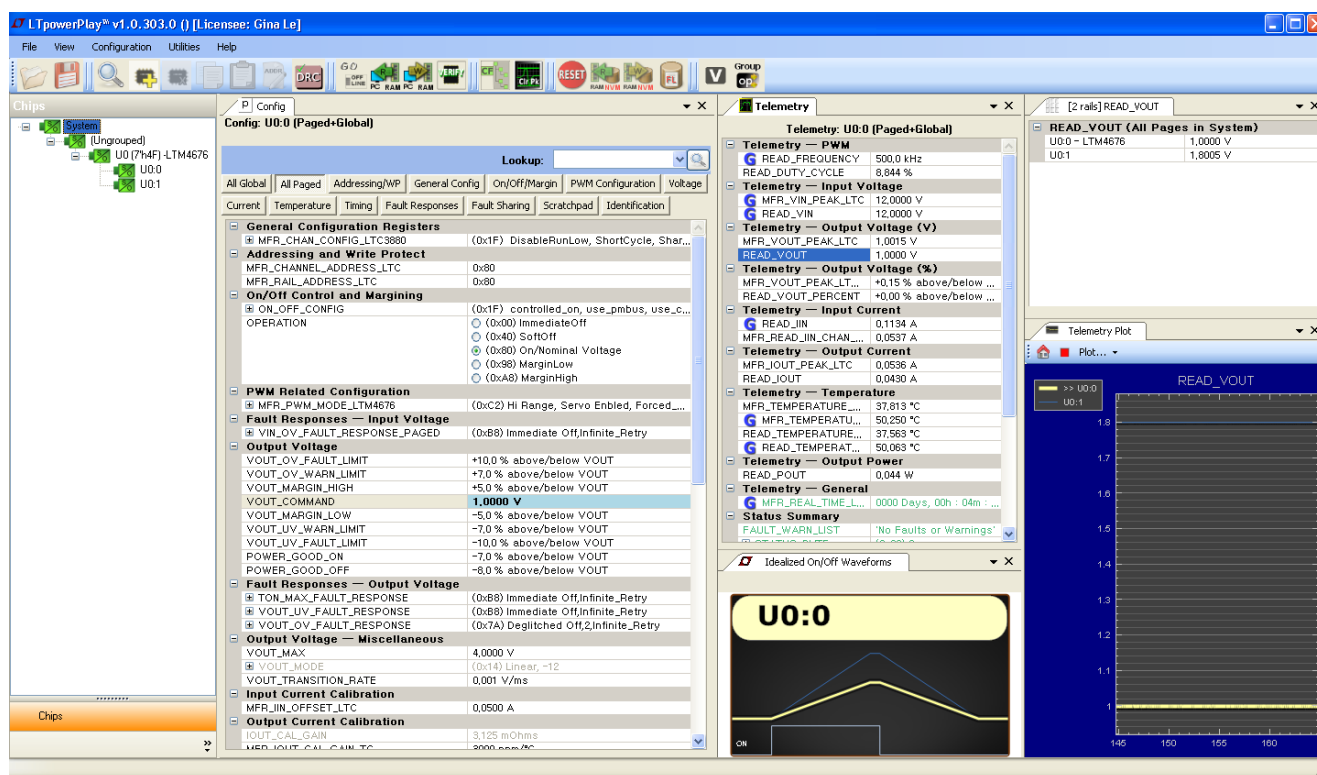


Figure 12. LTpowerPlay Main Interface

LTPowerPLAY QUICK START PROCEDURE


The following procedure describes how to use LTpowerPlay to monitor and change the settings of LTM4676.

1. Download and install the LTpowerPlay GUI:


<http://linear.com/ltpowerplay>

2. Launch the LTpowerPlay GUI.

- a. The GUI should automatically identify the DC2269A-A. The system tree on the left hand side should look like this:

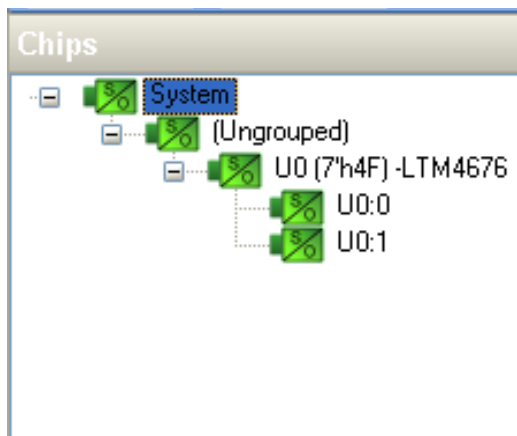


- b. A green message box shows for a few seconds in the lower left hand corner, confirming that LTM4676 is communicating:

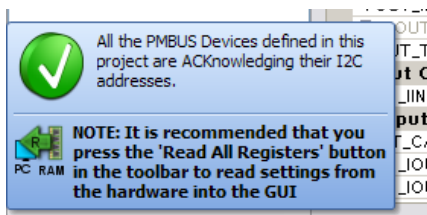

- c. In the Toolbar, click the “R” (RAM to PC) icon to read the RAM from the TM4676. This reads the configuration from the RAM of LTM4676 and loads it into the GUI.



- d. If you want to change the output voltage to a different value, like 1.5V. In the Config tab, type in 1.5 in the VOUT_COMMAND box, like this:

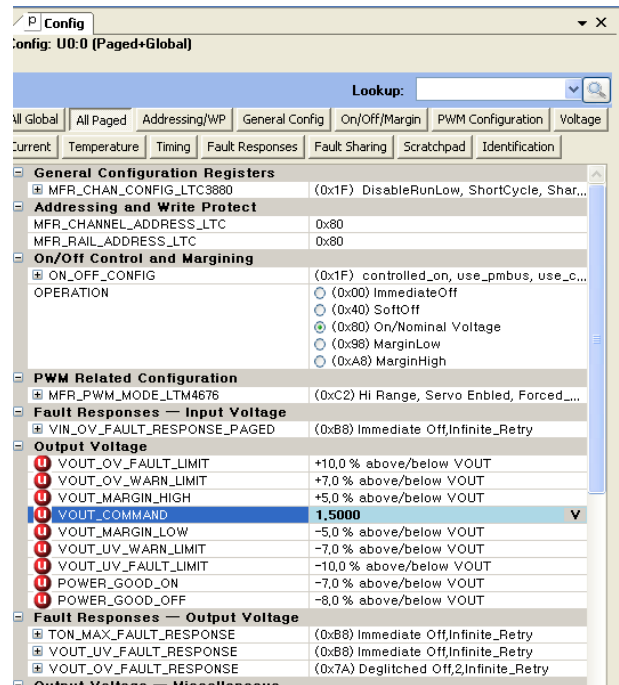

Then, click the “W” (PC to RAM) icon to write these register values to the LTM4676. After finishing this step, you will see the output voltage will change to 1.5V.



If the write is successful, you will see the following message:



- e. You can save the changes into the NVM. In the toolbar, click “RAM to NVM” button, as following:




- f. Save the demo board configuration to a (*.proj) file. Click the Save icon and save the file. Name it whatever you want.


DEMO MANUAL DC2269A-A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	6	CIN1, CIN2, CIN3, CIN4, CIN5, CIN6	CAP, 1210 10μF 10% 25V X5R	MURATA GRM32DR61E106KA12L
2	2	C01, C06	CAP, 7343 330μF 20% 6.3V POSCAP	PANASONIC 6TPF330M9L
3	5	C02, C03, C04, C05, C07	CAP, 1210 100μF 10% 6.3V X5R	AVX 12106D107KAT2A
4	2	C1, C5	CAP, 0603 2200pF 10% 50V X7R	AVX 06035C222KAT2A
5	2	C9, C10	CAP, 0805 47μF 20% 6.3V X5R	MURATA GRM21BR60J476ME15L
6	2	C12, C13	CAP, 0603 10μF 20% 25V X5R	MURATA GRM188R61E106MA73J
7	1	D1	DIODE, SCHOTTKY BARRIER RECTIFIER	DIODES INC. B0530WS-7-F
8	1	J2	HEADER, 4PIN 2mm STR DL	HIROSE DF3A-4P-2DSA
9	1	L1	IND, 1.0μH	COILCRAFT XAL5030-102MEC
10	3	R1, R22, R39	RES, 0603 100Ω 5% 0.1W	VISHAY CRCW0603100RJNEA
11	2	R6, R33	RES, 0603 0Ω	VISHAY CRCW06030000Z0EA
12	1	R7	RES, 0603 4.99kΩ 1% 0.1W	VISHAY CRCW06034K99FKEA
13	10	R10, R11, R12, R13, R14, R15, R16, R17, R18, R21	RES, 0603 10kΩ 5% 0.1W	VISHAY CRCW060310K0JNEA
14	1	R20	RES, 0603 4.22kΩ 1% 1/10W	VISHAY CRCW06034K22FKEA
15	1	R29	RES, 0603 6.34kΩ 1% 0.1W	VISHAY CRCW06036K34FKEA
16	3	R36, R37, R38	RES, 0603 10Ω 5% 0.1W	VISHAY CRCW060310R0JNEA
17	1	U1	IC, VOLTAGE REGULATOR LGA	LINEAR TECH. LTM4676EY#PBF
Additional Demo Board Circuit Components				
1	0	C2, C3, C4, C6, C7, C8, C11	CAP, 0603 OPTION	OPTION
2	0	R2, R19, R31, R32	RES, 0805 OPTION	OPTION
3	0	R3, R4, R5, R8, R9, R23, R24, R25, R27, R28	RES, 0603 OPTION	OPTION
4	0	R35	RES, 1206 OPTION	OPTION
	0	R40	RES, 1210 OPTION	OPTION
Hardware: For Demo Board Only				
1	1	J1	CONN., CARD EDGE	SAMTEC MEC2-20-01-L-DV--TR

SCHEMATIC DIAGRAM

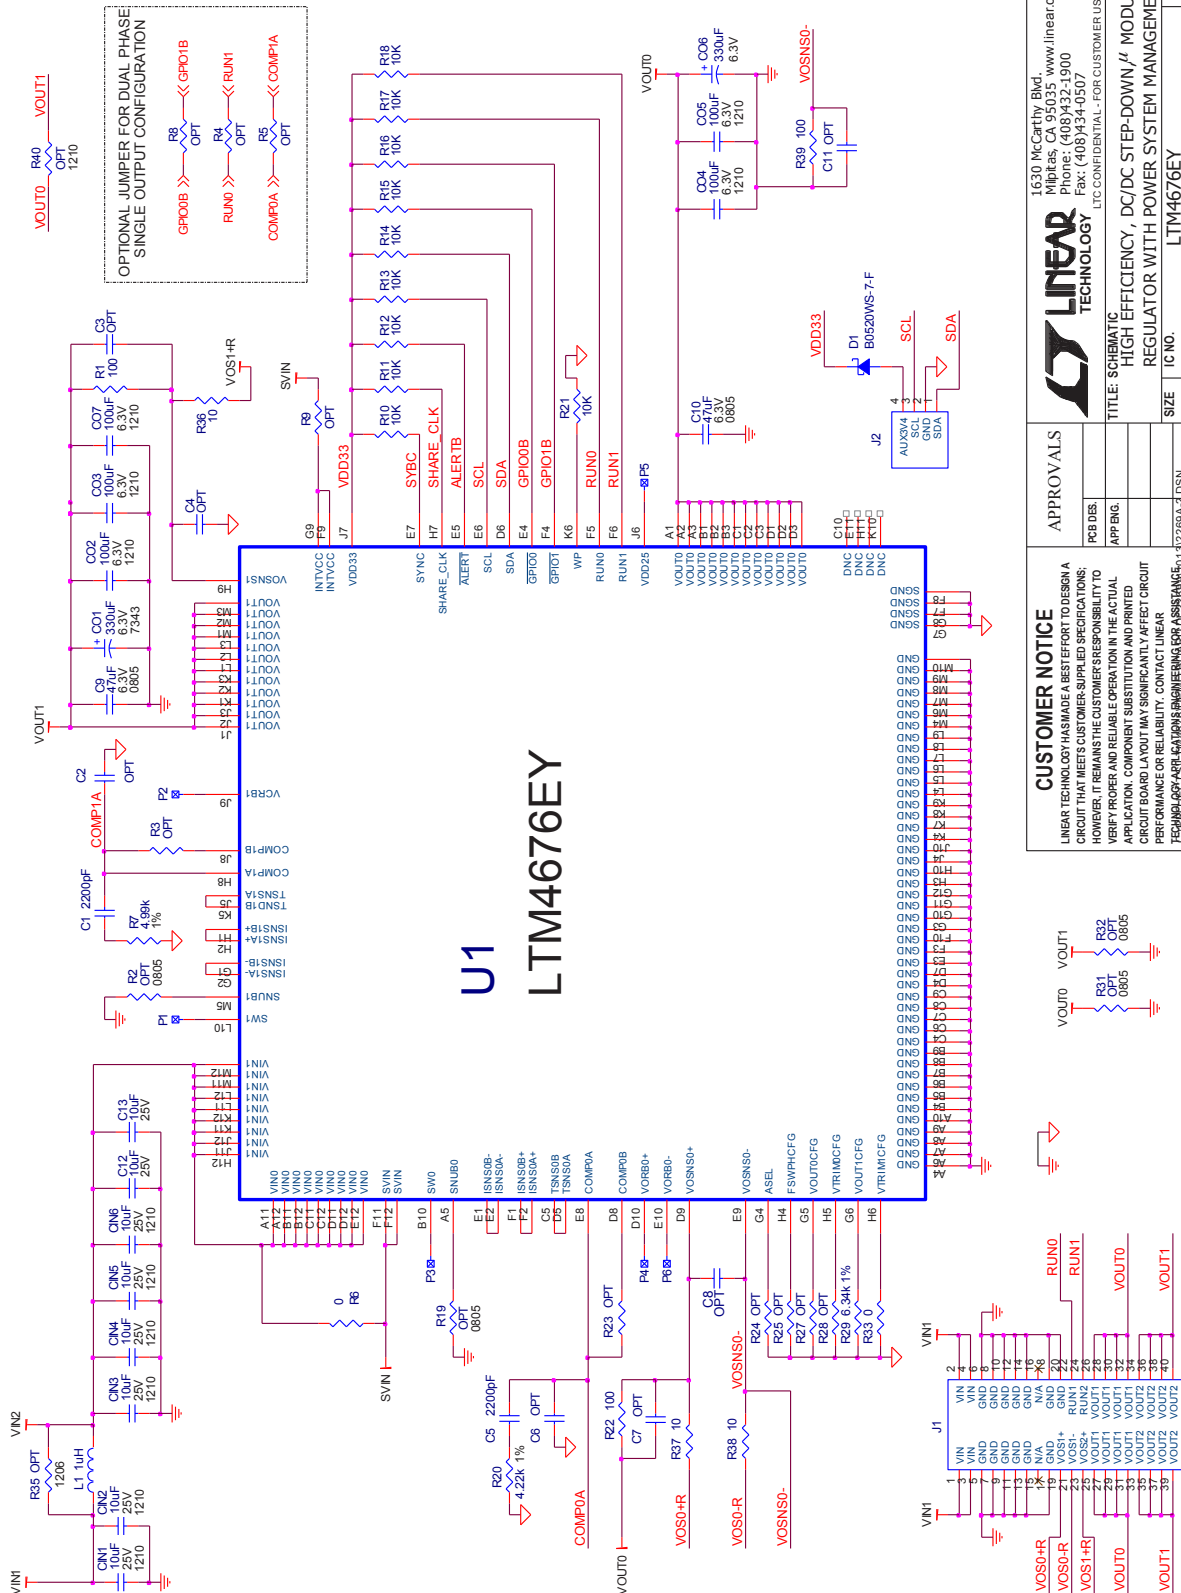

<div>CUSTOMER NOTICE</div> <div>LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.</div> <div>THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.</div>	<div>APPROVALS</div> <table><tr><td>PCB DES.</td><td></td><td></td><td></td></tr><tr><td>APP ENG.</td><td></td><td></td><td></td></tr></table>	PCB DES.				APP ENG.				<div> LINEAR TECHNOLOGY</div> <div>1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408)434-321900 Fax: (408)434-0507</div> <div>LET CONFIDENTIAL - FOR CUSTOMER USE ONLY</div>	<div>TITLE: SCHEMATIC</div> <div>REGULATOR WITH POWER SYSTEM MANAGEMENT</div> <div>HIGH EFFICIENCY, DC/DC STEP-DOWN μ MODULE</div> <table><tr><th>SIZE</th><th>IC NO.</th><th>REV.</th></tr><tr><td>N/A</td><td>LTM4676EY</td><td>2</td></tr></table> <div>DEMO CIRCUIT 2269A</div> <table><tr><th>DATE:</th><th>SHEET</th><th>1 OF</th></tr><tr><td>Monday, Oct 08 13, 2014</td><td>1</td><td>1</td></tr></table>	SIZE	IC NO.	REV.	N/A	LTM4676EY	2	DATE:	SHEET	1 OF	Monday, Oct 08 13, 2014	1	1
PCB DES.																							
APP ENG.																							
SIZE	IC NO.	REV.																					
N/A	LTM4676EY	2																					
DATE:	SHEET	1 OF																					
Monday, Oct 08 13, 2014	1	1																					

DEMO MANUAL DC2269A-A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc2269aaf