

101HS185
PAGE 1 OF 1

M

DRAWING
NUMBER

4

ISSUE

REPLACES

PR-19328

RELEASE NO.

CHECK

18 JUL 91

15 JUL 93

3 SEP 93

17 MAR 99

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91


16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

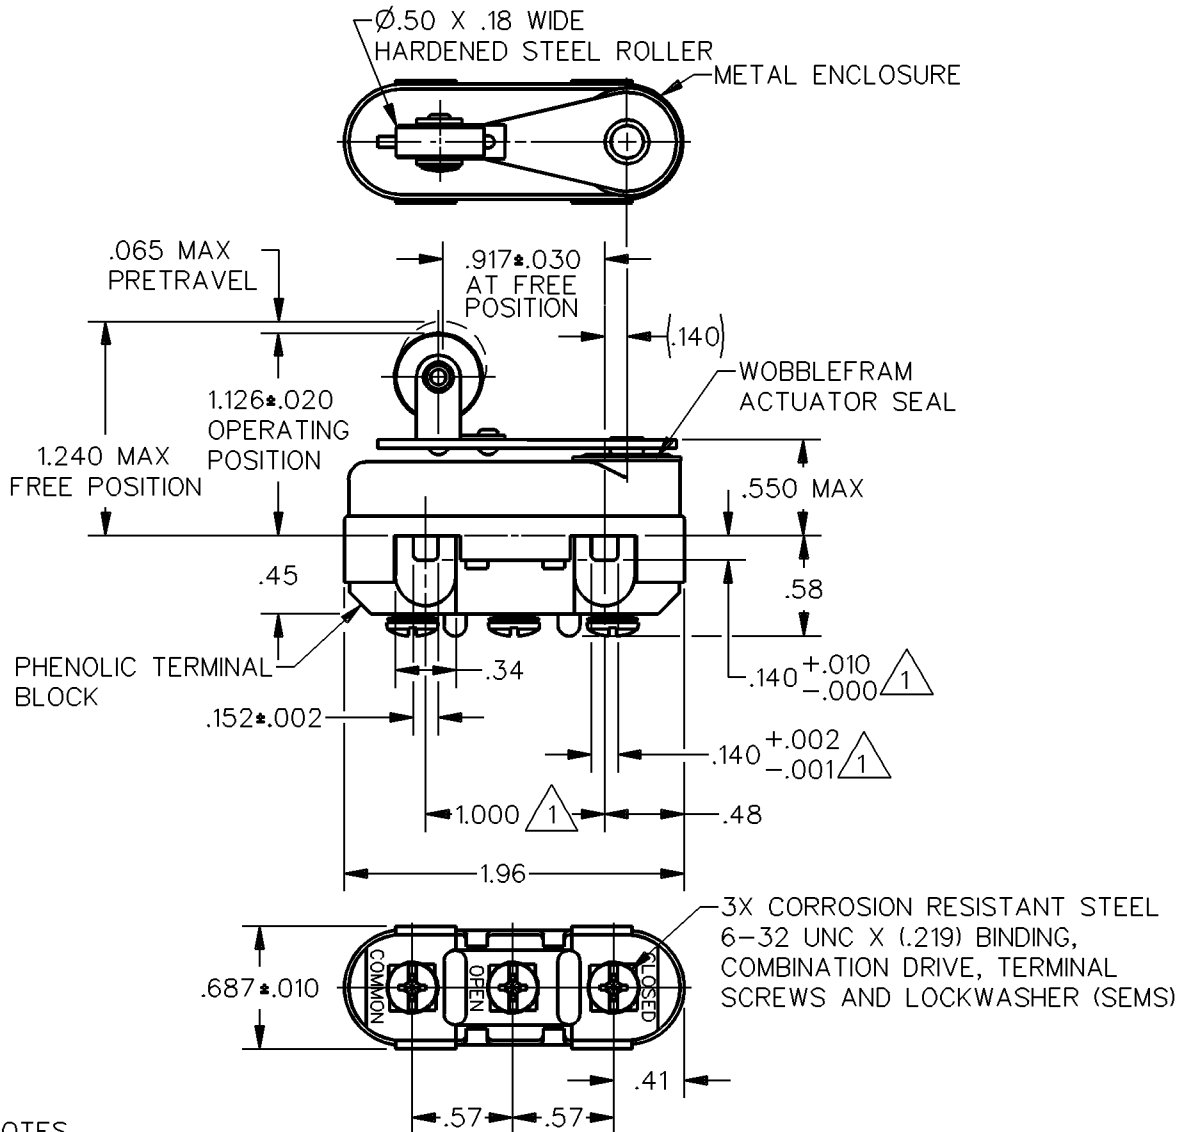


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing.139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - TRAVEL CHARACTERISTICS ARE REFERENCED FROM THE UPPER SURFACE OF MOUNTING HOLES WITH THIS CONSTRUCTION
- 3 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM -65°F TO 300°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 10-30 OZ	CONTACT ARRANGEMENT S P D T			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 4 OZ MIN	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD			
DIFFERENTIAL TRAVEL — — — .020 MAX	28 VDC	8 AMP	15 AMP	ONE PLACE (.01)	±.030	
OVERTRAVEL — — — — — .010 MIN	125 VAC	1 AMP	.5 AMP	TWO PLACE (.00)	±.015	
	L277			THREE PLACE (.000)	±.005	
	1A 125 VAC, 5A 28 VDC			ANGLES	±	
				WEIGHT	1.8 OZ MAX	



FORMTEK

DRAWN

CHECK

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91

16 JUL 91