

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-507

CK-E8250

CATALOG LISTING
V3-507

M

ISSUE
2

REPLACES

RELEASE NO. PR-19058

CHECK

REVISIONS

A	CO	76441
	DCS	22 DEC 93

CHECK

8 MAR 91



WJC

CHECK

B A B 7 MAR 91


DRAWN

DDM/CAD

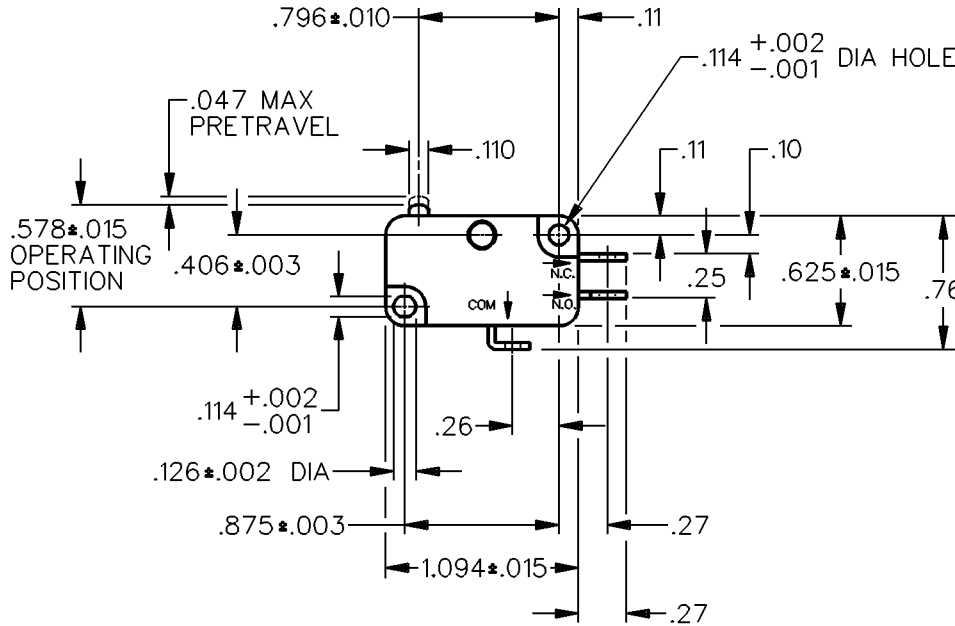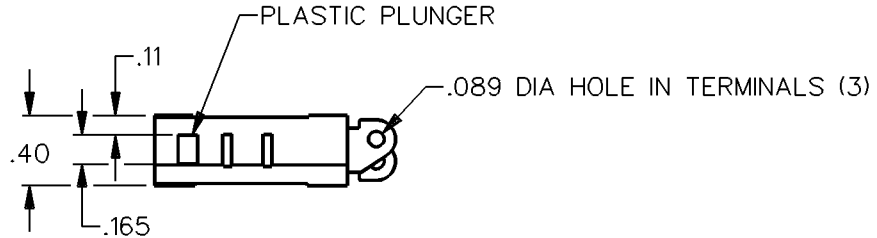

NOTE
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 8 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT .016 LB	
RELEASE FORCE — — — — 2 OZ MIN	L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"		
DIFFERENTIAL TRAVEL — — — .006-.016			
OVERTRAVEL — — — — .040 MIN			
FREE POSITION — — — — .625 MAX			
RELEASE TRAVEL — — — — .010 MIN			

