



MULTI-BAND OPERATION INWAVE SERIES ANTENNA

The multi-band InWave Series of indoor omnidirectional antenna systems offered by Laird Technologies are designed for in-building transmission of cellular telephone and wireless LAN signals. Because of the multi-band design, a single antenna can be used to service the building occupant's total wireless needs. The antennas are constructed of UL94-V0 white ABS plastic. The low profile attractive styling blends well in almost any office or home environment. Mounting is simplified with a single hole mount design to easily mount to drop ceilings or fixed ceilings. The antenna comes with a bulkhead N Female connector standard which is long enough to mount thru a max 1" thick ceiling.


FEATURES

- High gain omnidirectional indoor antenna
- Operates simultaneously on Cell, GSM, PCS, Wimax, and ISM
- Attractive housing ; UL listed materials
- Surface mount in drop ceiling or solid ceiling
- Vertical polarization
- Type N female connector


MARKETS

- 806 - 960MHz CELL/GSM
- 1710-1990MHz DCS/PCS/GSM
- 2300-2700MHz ISM (BT) & Wimax
- 3300-3800MHz Wimax
- 5150-5850MHz ISM


ANTENNA PATTERNS

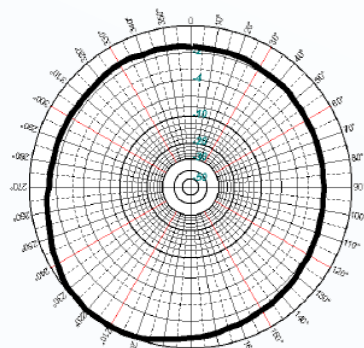


Typical Azimuth Pattern




Elevation Pattern 806-960 MHz



Elevation Pattern 1710-1990 MHz



Elevation Pattern 2300-2700 MHz



Elevation Pattern 5100-5850 MHz

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com



Innovative **Technology**
for a **Connected** World

InWave Series Antenna

IN800/5900-5

SPECIFICATIONS

PARAMETER	SPECIFICATIONS
Frequency range	806-5850 MHz
Gain - 806-928 MHz GSM/ISM	2.2 dBi
Gain - 1710-1990 MHz PCS/GSM	2.2 dBi
Gain - 2300-2700 MHz 2.4GHz ISM/Wimax	5 dBi
Gain - 3300-3800 MHz 3.5GHz Wimax	3.5 dBi
Gain - 5150 – 5850 MHz 5.8GHz ISM	3.5 dBi
VSWR	1.8:1
Impedance	50 ohm
Input power	50 watts
Operating temperature	-10° to +70°C (14° to +158°F)
Mounting hole size	5/8" (16 mm)
Weight	13oz (369 grams)
Dimensions (diameter x height)	7.25" x 4.25" (184 x 108 mm)
Radome material	ABS

SYSTEM ORDERING

IN800/5900-5 Multi-Band Indoor Antenna

NOTES

- All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-IN800-5900 0909

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2009 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.