



# STD70N2LH5 STU70N2LH5

N-channel 25 V, 0.006  $\Omega$ , 48 A - DPAK - IPAK  
STripFET™ V Power MOSFET

Preliminary Data

## Features

| Type       | V <sub>DS</sub> | R <sub>DS(on)</sub> max | I <sub>D</sub> |
|------------|-----------------|-------------------------|----------------|
| STD70N2LH5 | 25 V            | 0.0071 $\Omega$         | 48 A           |
| STU70N2LH5 | 25 V            | 0.0075 $\Omega$         | 48 A           |

- R<sub>DS(on)</sub> \* Q<sub>g</sub> industry benchmark
- Extremely low on-resistance R<sub>DS(on)</sub>
- Very low switching gate charge
- High avalanche ruggedness
- Low gate drive power losses

## Application

- Switching applications

## Description

This product utilizes the 5<sup>th</sup> generation of design rules of ST's proprietary STripFET™ technology. The lowest available R<sub>DS(on)</sub>\*Q<sub>g</sub>, in the standard packages, makes this device suitable for the most demanding DC-DC converter applications, where high power density is to be achieved.

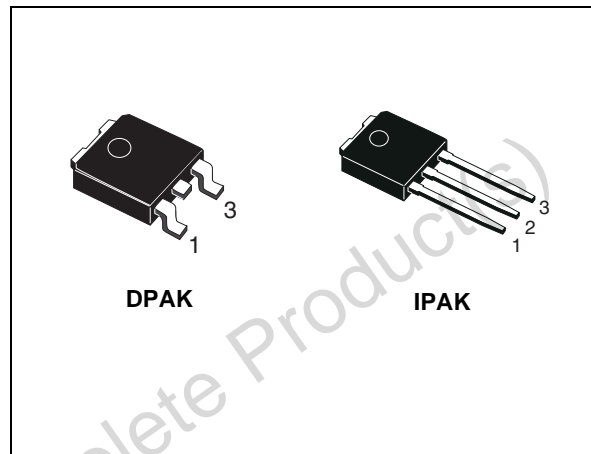


Figure 1. Internal schematic diagram

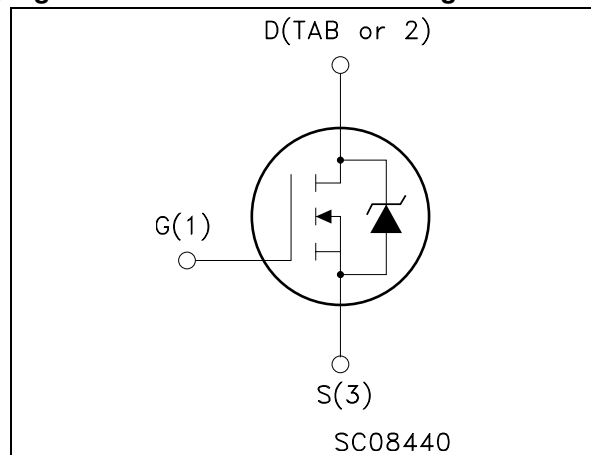


Table 1. Device summary

| Order codes | Marking | Package | Packaging   |
|-------------|---------|---------|-------------|
| STD70N2LH5  | 70N2LH5 | DPAK    | Tape & reel |
| STU70N2LH5  | 70N2LH5 | IPAK    | Tube        |

# 1 Electrical ratings

**Table 2. Absolute maximum ratings**

| Symbol             | Parameter   | Value      | Unit                |
|--------------------|---|------------|---------------------|
| $V_{DS}$           | Drain-source voltage ( $V_{GS}=0$ )                             | 25         | V                   |
| $V_{GS}$           | Gate-Source voltage   | $\pm 22$   | V                   |
| $I_D^{(1)}$        | Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$  | 48         | A                   |
| $I_D$              | Drain current (continuous) at $T_C = 100\text{ }^\circ\text{C}$ | 43         | A                   |
| $I_{DM}^{(2)}$     | Drain current (pulsed)  | 192        | A                   |
| $P_{TOT}$          | Total dissipation at $T_C = 25\text{ }^\circ\text{C}$           | 60         | W                   |
|                    | Derating factor   | 0.4        | W/ $^\circ\text{C}$ |
| $E_{AS}^{(3)}$     | Single pulse avalanche energy                                   | TBD        | mJ                  |
| $T_j$<br>$T_{stg}$ | Operating junction temperature<br>Storage temperature           | -55 to 175 | $^\circ\text{C}$    |

1. Limited by wire bonding
2. Pulse width limited by safe operating area
3. Starting  $T_j = 25\text{ }^\circ\text{C}$ ,  $I_D = 24\text{ A}$ ,  $V_{DD} = 12\text{ V}$

**Table 3. Thermal resistance**

| Symbol         | Parameter                                      | Value | Unit               |
|----------------|--|-------|--------------------|
| $R_{thj-case}$ | Thermal resistance junction-case max           | 2.5   | $^\circ\text{C/W}$ |
| $R_{thj-amb}$  | Thermal resistance junction-case max           | 100   | $^\circ\text{C/W}$ |
| $T_j$          | Maximum lead temperature for soldering purpose | 275   | $^\circ\text{C}$   |

## 2 Electrical characteristics

(T<sub>CASE</sub> = 25°C unless otherwise specified)

**Table 4. Static**

| Symbol               | Parameter   | Test conditions   | Min. | Typ.   | Max.    | Unit     |
|----------------------|---|---|------|--------|---------|----------|
| V <sub>(BR)DSS</sub> | Drain-source breakdown Voltage                        | I <sub>D</sub> = 250 μA, V <sub>GS</sub> = 0                              | 25   |        |         | V        |
| I <sub>DSS</sub>     | Zero gate voltage drain current (V <sub>GS</sub> = 0) | V <sub>DS</sub> = 25 V<br>V <sub>DS</sub> = 25 V, T <sub>C</sub> = 125 °C |      |        | 1<br>10 | μA<br>μA |
| I <sub>GSS</sub>     | Gate body leakage current (V <sub>DS</sub> = 0)       | V <sub>GS</sub> = ± 22 V  |      |        | ±100    | nA       |
| V <sub>GS(th)</sub>  | Gate threshold voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA               | 1    |        |         | V        |
| R <sub>DS(on)</sub>  | Static drain-source on resistance                     | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 24 A<br>SMD version              |      | 0.006  | 0.0071  | Ω        |
|                      |   | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 24 A                             |      | 0.0064 | 0.0075  | Ω        |
|                      |   | V <sub>GS</sub> = 5 V, I <sub>D</sub> = 24 A<br>SMD version               |      | 0.008  | 0.01    | Ω        |
|                      |   | V <sub>GS</sub> = 5 V, I <sub>D</sub> = 24 A                              |      | 0.0084 | 0.0104  | Ω        |

**Table 5. Dynamic**

| Symbol           | Parameter                                  | Test conditions   | Min | Typ. | Max. | Unit |
|------------------|--|---|-----|------|------|------|
| C <sub>iss</sub> | Input capacitance                          | V <sub>DS</sub> = 25 V, f = 1 MHz,<br>V <sub>GS</sub> = 0               |     | 1300 |      | pF   |
| C <sub>oss</sub> | Output capacitance                         |   |     | 300  |      | pF   |
| C <sub>rss</sub> | Reverse transfer capacitance               |   |     | 50   |      | pF   |
| Q <sub>g</sub>   | Total gate charge                          | V <sub>DD</sub> = 15 V, I <sub>D</sub> = 48 A                           |     | 8    |      | nC   |
| Q <sub>gs</sub>  | Gate-source charge                         | V <sub>GS</sub> = 5 V   |     | TBD  |      | nC   |
| Q <sub>gd</sub>  | Gate-drain charge                          | (Figure 3)  |     | TBD  |      | nC   |
| Q <sub>gs1</sub> | Pre V <sub>th</sub> gate-to-source charge  | V <sub>DD</sub> = 15 V, I <sub>D</sub> = 48 A                           |     | TBD  |      | nC   |
| Q <sub>gs2</sub> | Post V <sub>th</sub> gate-to-source charge | V <sub>GS</sub> = 5 V<br>(Figure 8)                                     |     | TBD  |      | nC   |
| R <sub>G</sub>   | Gate input resistance                      | f = 1 MHz gate bias<br>Bias = 0 test signal level = 20 mV<br>open drain |     | 1.1  |      | Ω    |

**Table 6. Switching on/off (resistive load)**

| Symbol                | Parameter                        | Test conditions  | Min. | Typ.       | Max. | Unit     |
|-----------------------|----------------------------------|--|------|------------|------|----------|
| $t_{d(on)}$<br>$t_r$  | Turn-on delay time<br>Rise time  | $V_{DD}=10\text{ V}$ , $I_D=24\text{ A}$ ,<br>$R_G=4.7\ \Omega$ , $V_{GS}=10\text{ V}$<br><i>(Figure 2 and Figure 7)</i> |      | TBD<br>TBD |      | ns<br>ns |
| $t_{d(off)}$<br>$t_f$ | Turn-off delay time<br>Fall time | $V_{DD}=10\text{ V}$ , $I_D=24\text{ A}$ ,<br>$R_G=4.7\ \Omega$ , $V_{GS}=10\text{ V}$<br><i>(Figure 2 and Figure 7)</i> |      | TBD<br>TBD |      | ns<br>ns |


**Table 7. Source drain diode**

| Symbol    | Parameter                                    | Test conditions  | Min. | Typ. | Max. | Unit |
|-----------|--|--|------|------|------|------|
| $I_{SD}$  | Source-drain current                         |  |      |      | 48   | A    |
| $I_{SDM}$ | Source-drain current (pulsed) <sup>(1)</sup> |  |      |      | 192  | A    |
| $V_{SD}$  | Forward on voltage                           | $I_{SD}=24\text{ A}$ , $V_{GS}=0$  |      |      | 1.1  | V    |
| $t_{rr}$  | Reverse recovery time                        | $I_{SD}=48\text{ A}$ ,<br>$di/dt=100\text{ A}/\mu\text{s}$ ,<br>$V_{DD}=20\text{ V}$ , $T_j=25\text{ }^\circ\text{C}$<br><i>(Figure 4)</i> |      | TBD  |      | ns   |
| $Q_{rr}$  | Reverse recovery charge                      |  |      | TBD  |      | nC   |
| $I_{RRM}$ | Reverse recovery current                     |  |      | TBD  |      | A    |


1. Pulsed: pulse duration = 300µs, duty cycle 1.5%

### 3 Test circuit


**Figure 2. Switching times test circuit for resistive load**

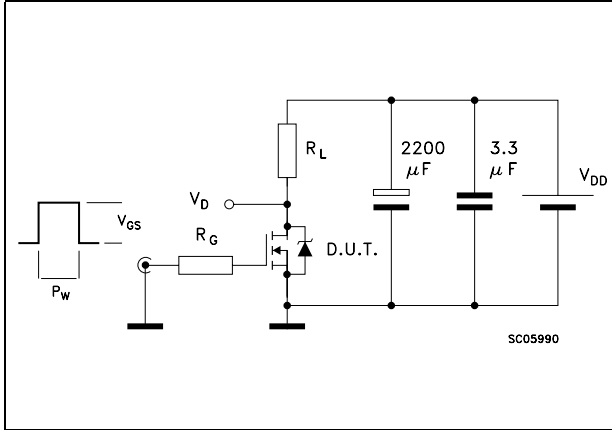


**Figure 3. Gate charge test circuit**

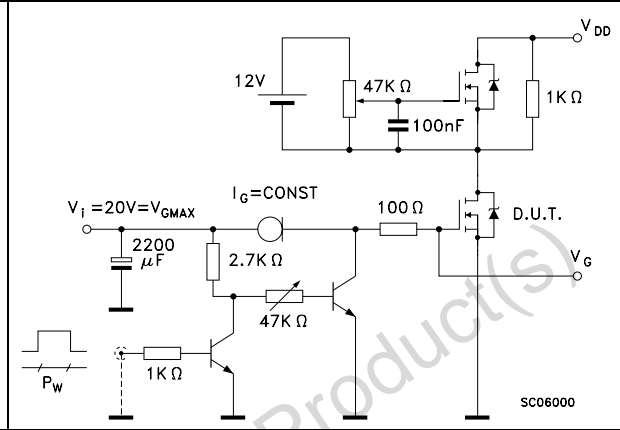


**Figure 4. Test circuit for inductive load switching and diode recovery times**

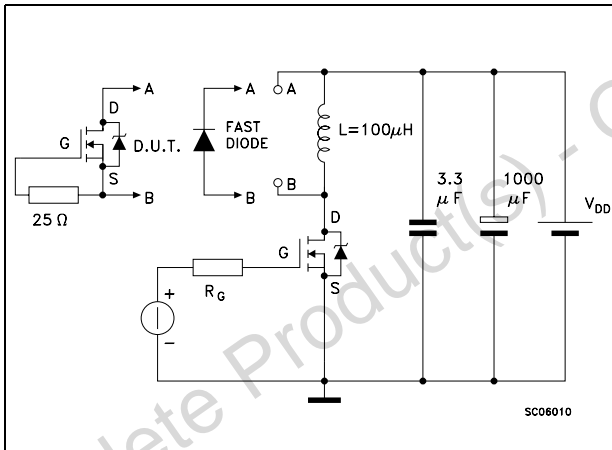

**Figure 5. Unclamped Inductive load test circuit**

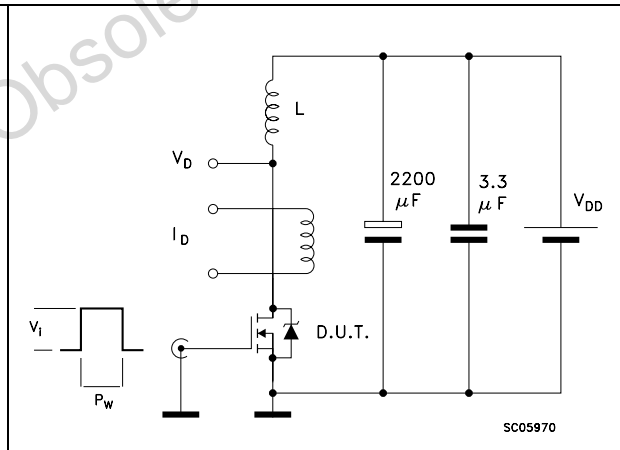

**Figure 6. Unclamped inductive waveform**

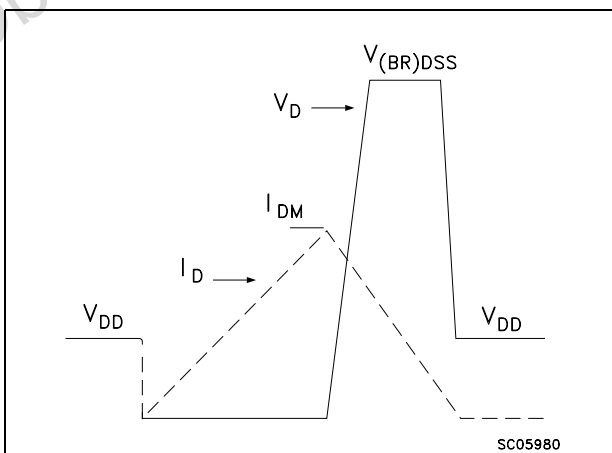

**Figure 7. Switching time waveform**


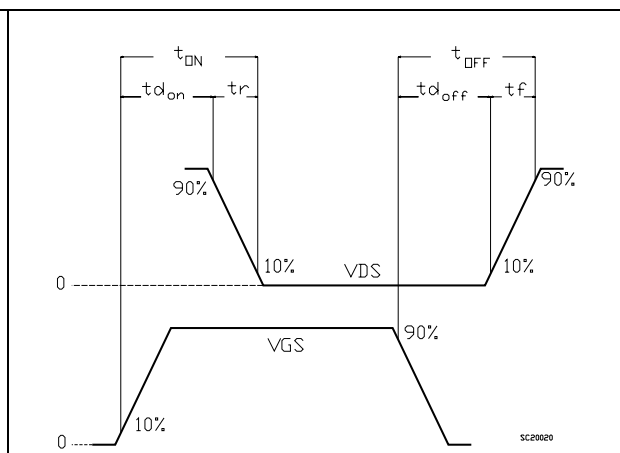


Figure 8. Gate charge waveform

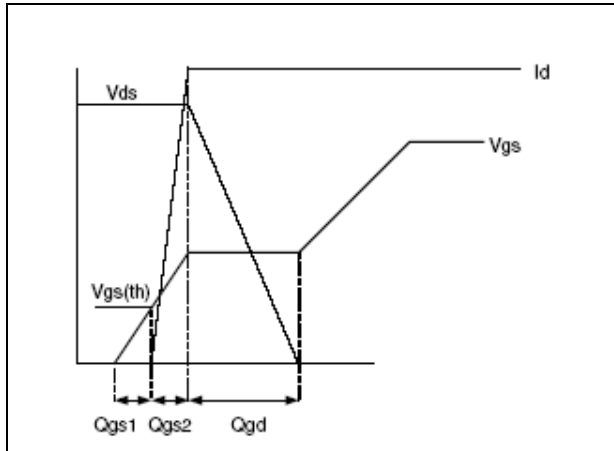

Obsolete Product(s) - Obsolete Product(s)


## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

Obsolete Product(s) - Obsolete Product(s)

**DPAK MECHANICAL DATA**

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |      | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |      | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |      | 0.23 | 0.001 |       | 0.009 |
| B    | 0.64 |      | 0.9  | 0.025 |       | 0.035 |
| b4   | 5.2  |      | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |      | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |      | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |      | 6.2  | 0.236 |       | 0.244 |
| D1   |      | 5.1  |      |       | 0.200 |       |
| E    | 6.4  |      | 6.6  | 0.252 |       | 0.260 |
| E1   |      | 4.7  |      |       | 0.185 |       |
| e    |      | 2.28 |      |       | 0.090 |       |
| e1   | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| H    | 9.35 |      | 10.1 | 0.368 |       | 0.397 |
| L    | 1    |      |      | 0.039 |       |       |
| (L1) |      | 2.8  |      |       | 0.110 |       |
| L2   |      | 0.8  |      |       | 0.031 |       |
| L4   | 0.6  |      | 1    | 0.023 |       | 0.039 |
| R    |      | 0.2  |      |       | 0.008 |       |
| V2   | 0°   |      | 8°   | 0°    |       | 8°    |

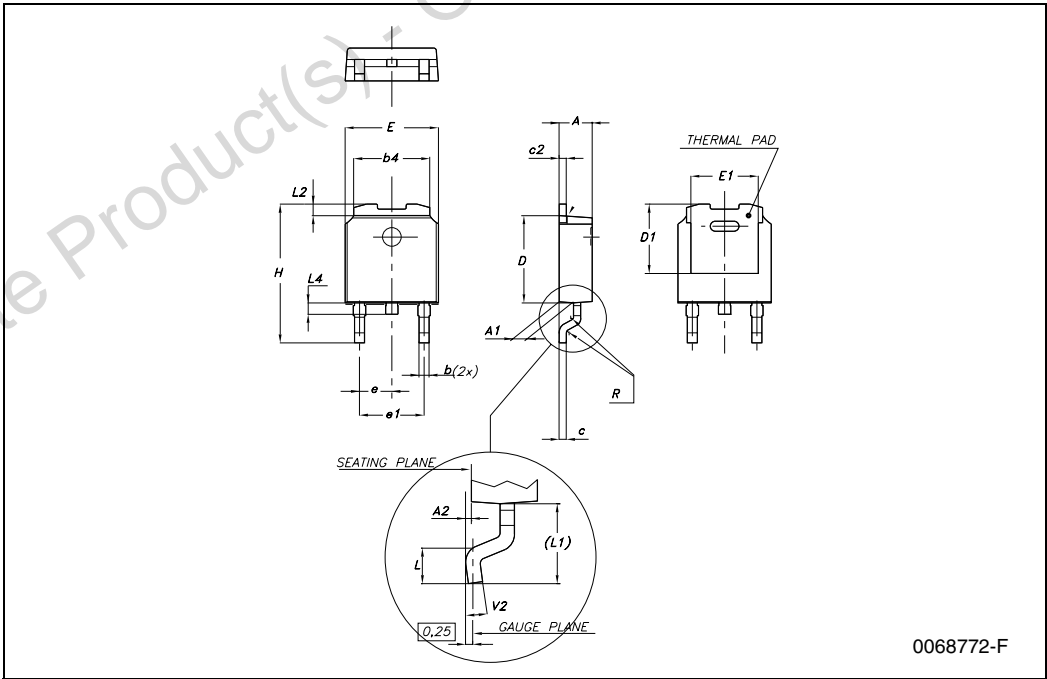


0068772-F




**TO-251 (IPAK) MECHANICAL DATA**

| DIM. | mm   |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |      | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |      | 1.1  | 0.035 |       | 0.043 |
| A3   | 0.7  |      | 1.3  | 0.027 |       | 0.051 |
| B    | 0.64 |      | 0.9  | 0.025 |       | 0.031 |
| B2   | 5.2  |      | 5.4  | 0.204 |       | 0.212 |
| B3   |      |      | 0.85 |       |       | 0.033 |
| B5   |      | 0.3  |      |       | 0.012 |       |
| B6   |      |      | 0.95 |       |       | 0.037 |
| C    | 0.45 |      | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |      | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |      | 6.2  | 0.236 |       | 0.244 |
| E    | 6.4  |      | 6.6  | 0.252 |       | 0.260 |
| G    | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| H    | 15.9 |      | 16.3 | 0.626 |       | 0.641 |
| L    | 9    |      | 9.4  | 0.354 |       | 0.370 |
| L1   | 0.8  |      | 1.2  | 0.031 |       | 0.047 |
| L2   |      | 0.8  | 1    |       | 0.031 | 0.039 |

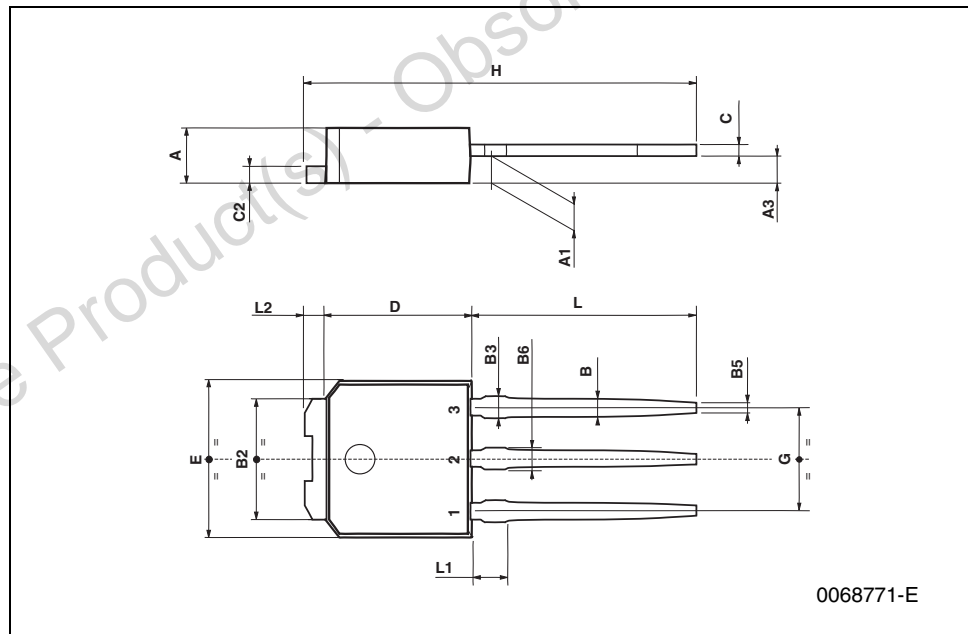

## 5 Packaging mechanical data

### DPAK FOOTPRINT

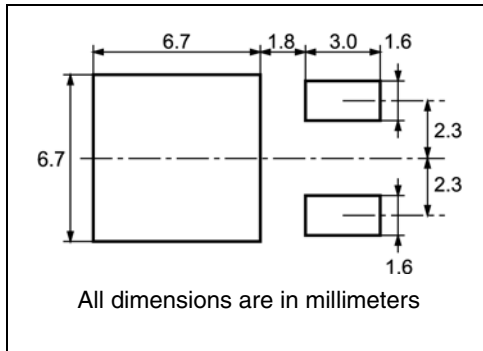

### TAPE AND REEL SHIPMENT

40 mm min. Access hole at slot location

Full radius

Tape slot in core for tape start 25mm min. width

G measured at hub

| DIM. | mm   |      | inch  |        |
|------|------|------|-------|--------|
|      | MIN. | MAX. | MIN.  | MAX.   |
| A    |      | 330  |       | 12.992 |
| B    | 1.5  |      | 0.059 |        |
| C    | 12.8 | 13.2 | 0.504 | 0.520  |
| D    | 20.2 |      | 0.795 |        |
| G    | 16.4 | 18.4 | 0.645 | 0.724  |
| N    | 50   |      | 1.968 |        |
| T    |      | 22.4 |       | 0.881  |

| BASE QTY | BULK QTY |
|----------|----------|
| 2500     | 2500     |

#### TAPE MECHANICAL DATA

| DIM. | mm   |      | inch  |       |
|------|------|------|-------|-------|
|      | MIN. | MAX. | MIN.  | MAX.  |
| A0   | 6.8  | 7    | 0.267 | 0.275 |
| B0   | 10.4 | 10.6 | 0.409 | 0.417 |
| B1   |      | 12.1 |       | 0.476 |
| D    | 1.5  | 1.6  | 0.059 | 0.063 |
| D1   | 1.5  |      | 0.059 |       |
| E    | 1.65 | 1.85 | 0.065 | 0.073 |
| F    | 7.4  | 7.6  | 0.291 | 0.299 |
| K0   | 2.55 | 2.75 | 0.100 | 0.108 |
| P0   | 3.9  | 4.1  | 0.153 | 0.161 |
| P1   | 7.9  | 8.1  | 0.311 | 0.319 |
| P2   | 1.9  | 2.1  | 0.075 | 0.082 |
| R    | 40   |      | 1.574 |       |
| W    | 15.7 | 16.3 | 0.618 | 0.641 |

10 pitches cumulative tolerance on tape +/- 0.2 mm

TOP COVER TAPE

Center line of cavity

User Direction of Feed

Feeding radius

R min.

For machine ref. only including draft and radii concentric around B0

## 6 Revision history

**Table 8. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 16-Jan-2008 | 1        | First release  |
| 23-Sep-2008 | 2        | $V_{GS}$ value has been changed on <a href="#">Table 2</a> and <a href="#">Table 5</a> |

Obsolete Product(s) - Obsolete Product(s)

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)