

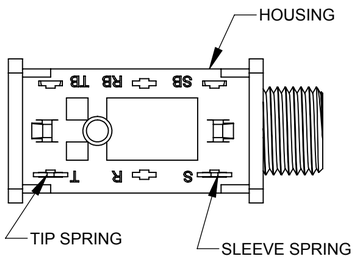



2 CONDUCTOR SINGLE OPEN CIRCUIT

SN49B11



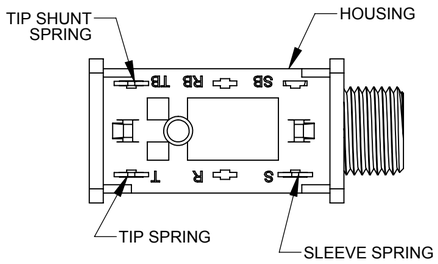



2 CONDUCTOR SINGLE CLOSED CIRCUIT

SN49B12A



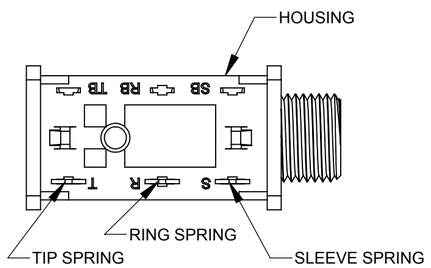



3 CONDUCTOR DOUBLE OPEN CIRCUIT

SN49B12B



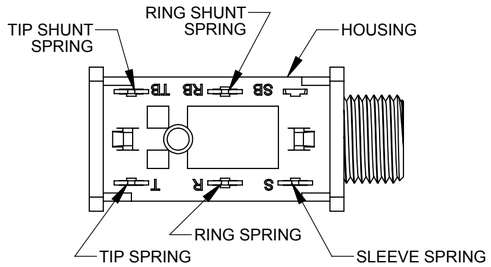



3 CONDUCTOR DOUBLE CLOSED CIRCUIT

SN49B14B

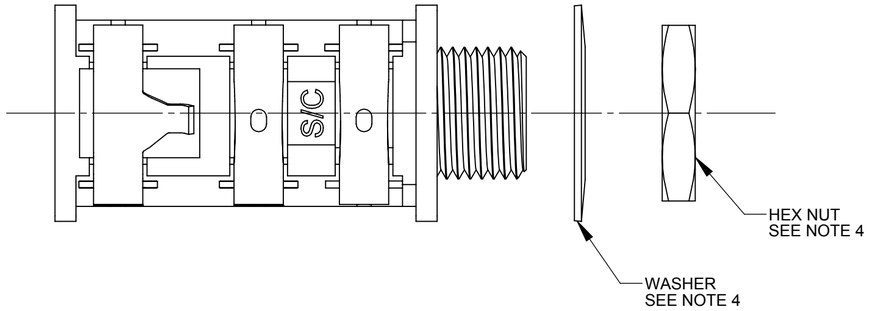



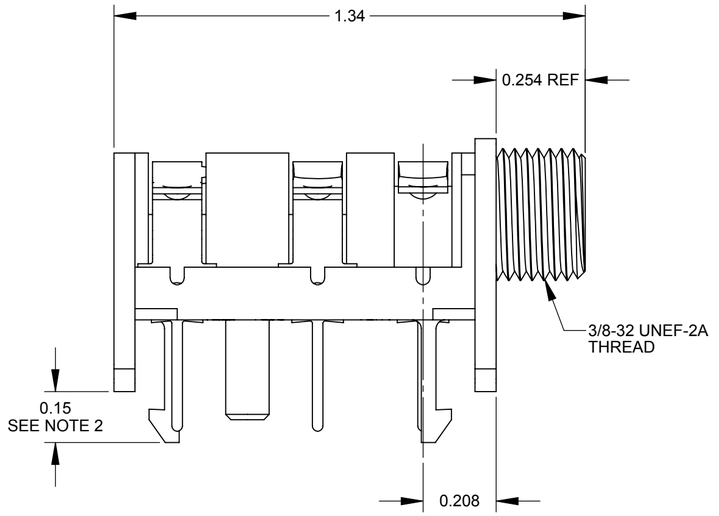

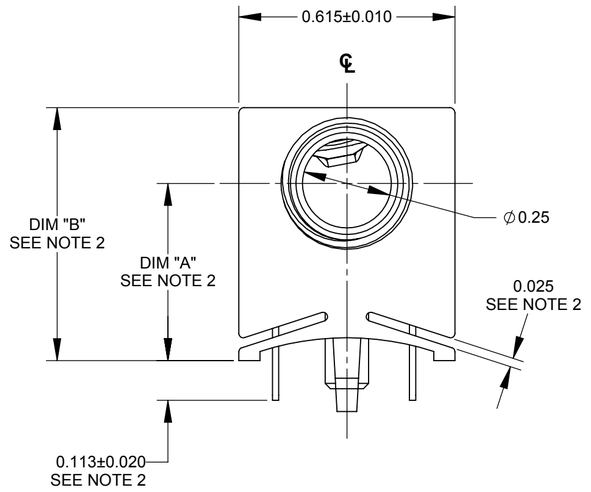

SN49B14B SHOWN

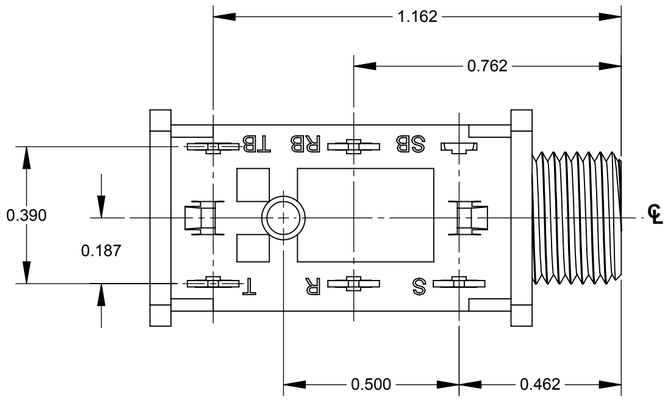

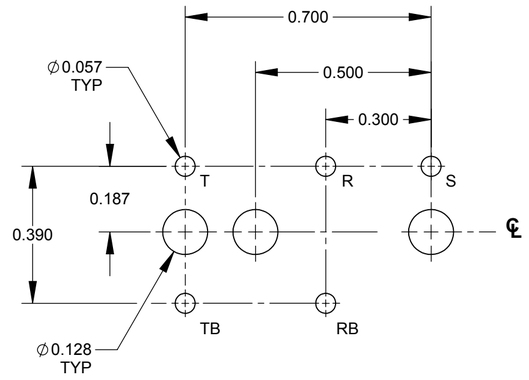

RECOMMENDED PC BOARD LAYOUT COMPONENT SIDE

NOTES:

1. MAY BE USED WITH PC BOARD THICKNESSES RANGING FROM 0.054 - 0.070.
2. THESE DIMENSIONS VARY DEPENDING ON PCB THICKNESS. DIMENSIONS SHOWN ARE FREE STATE AS SHIPPED.
3. MATERIAL SPECIFICATIONS:
   HOUSING - THERMOPLASTIC, BLACK.
   SPRINGS - SPECIAL COPPER ALLOY, TINNED.
   HARDWARE - COPPER ALLOY, NICKEL PLATED.
4. HARDWARE SHIPPED UNASSEMBLED.
5. THESE PRODUCTS ARE RoHS COMPLIANT.

PART NUMBER	DIM "A"		DIM "B"	
	FREE STATE	WITH 0.062 THICK PCB	FREE STATE	WITH 0.062 THICK PCB
SN49B11	0.504	0.492	0.720	0.708
SN49B12A	0.504	0.492	0.720	0.708
SN49B12B	0.504	0.492	0.720	0.708
SN49B14B	0.504	0.492	0.720	0.708

REV	ECO NUMBER	DATE	BY	APVD
D	CAD REDRAW ECO #27409	11/17/14	PC	TJK

REVISIONS

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
   - TWO PLACE DECIMALS ±0.02
   - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

CUSTOMER DRAWING

SIZE	WIDTH	MULT	LBS/M	TEMPER

FINISH
SPEC No.

MATERIAL
SPEC No.

FIRST USED ON

SCALE 3:1

DATE DRAWN	BY	CHKD	APVD
06/28/83	VL	VL 07/15/83	KR 07/18/83

Switchcraft®

SHEET 1 OF 1

NAME PHONE JACK INSULATED BUSHING

PART No. SN49B SERIES

REV D

SolidWorks CAD File