


REV.
DWG. 1-1437507-0

DWG. 1-1437507-0


3 EQ. SP. @ .100 EACH
= .300
2 EQ. SP. @ .100 EACH
= .200

POLARIZATION NOTCH

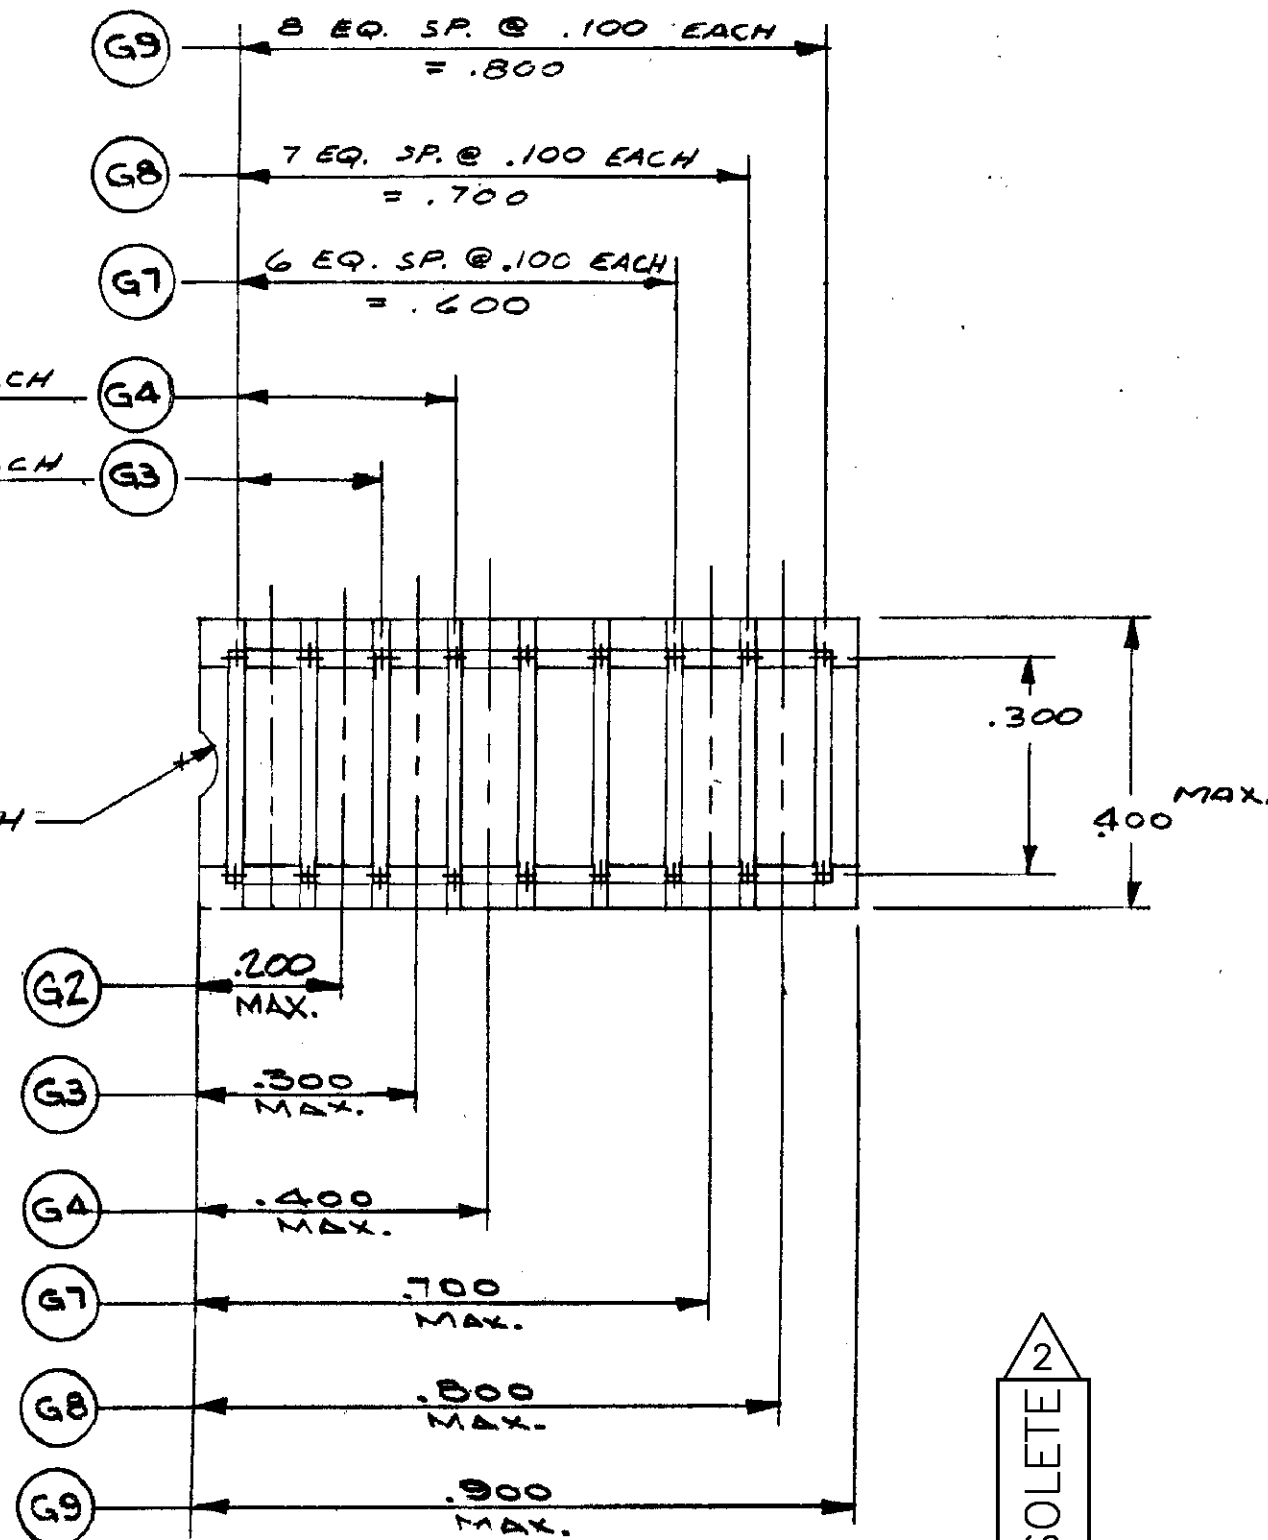

NOTES:

- 1. MATERIAL AND FINISH:
 INSULATOR — THERMOPLASTIC POLYESTER UL RATED 90V-0; COLOR-BLACK
 (G) CONTACT — PHOSPHOR BRONZE, GOLD OVER NICKEL PLATE
 (GT) CONTACT — PHOSPHOR BRONZE, TIN PLATE.
- 2. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

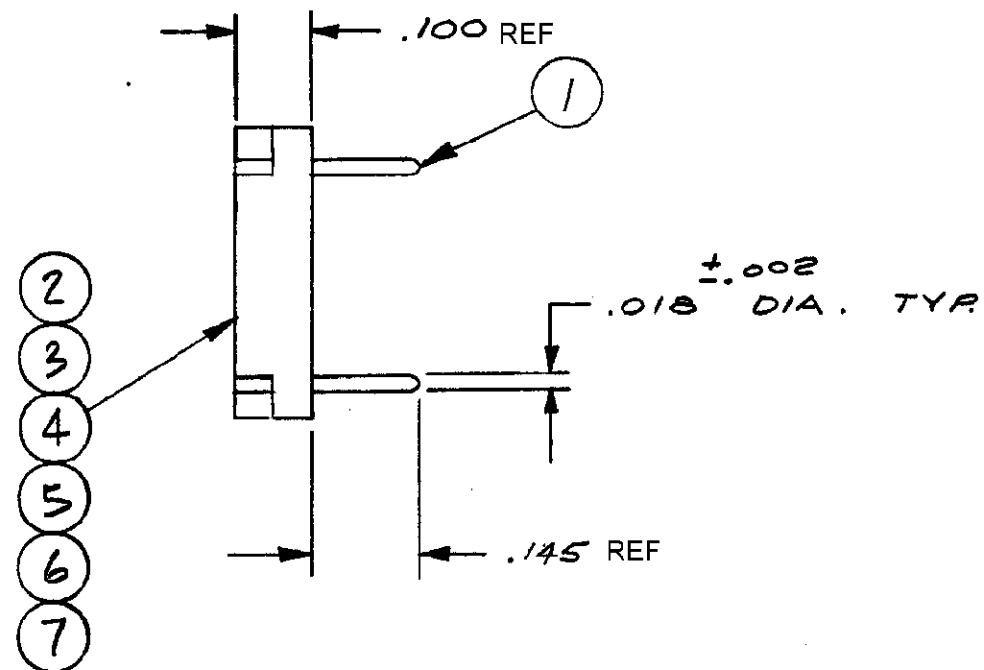

2 OBSOLETE
 2 OBSOLETE
 2 OBSOLETE
 OBSOLETE
 SUP BY 2-1437507-1
 2-1437507-0
 1-1437507-6
 1-1437507-6
 1-1437507-6
 1-1437507-0
 2-1437507-1
 1-1437507-9
 1-1437507-7
 1-1437507-5
 1-1437507-3

PART NO.S

9	8	7																	SHORTING PIN	1
			2	7	8	7	4	3											SHORTING PIN	1
			1						1										INSULATOR	7
1										1									INSULATOR	6
							1					1							INSULATOR	5
													1						INSULATOR	4
									1										INSULATOR	3
																	1		INSULATOR	2
										2	9	8	7	4	3				SHORTING PIN	1
G25	G24	G23	G2T	G2T	G2T	G2T	G2T	G2T	G2T	G2	G3	G8	G7	G4	G3	DESCRIPTION				ITEM NO.
QUANTITY																				

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES REF

MATERIAL: — 67 —

FINISH: — 67 —

ORIGINAL DATE OF DRAWING: 4-4-73

DRAWN: RJS DATE: 4-4-74

CHECKED: K.J.H. DATE: 4-5-74

APPROVED: R.J.H. DATE: 2-5-74

CODE IDENT. NO. 91506 DWG. SIZE C

TE Connectivity

TITLE: PROGRAMMING PLUG

DWG. NO. 1-1437507-0 REV. A1

SCALE: 4X1 SHEET 1 OF 1

NEXT ASSY.

A1	REVISED PER ECO-11-005140	RK	HMR	DMARTS
LTR	(REVISION RECORD)	DR	CHK	DATE