
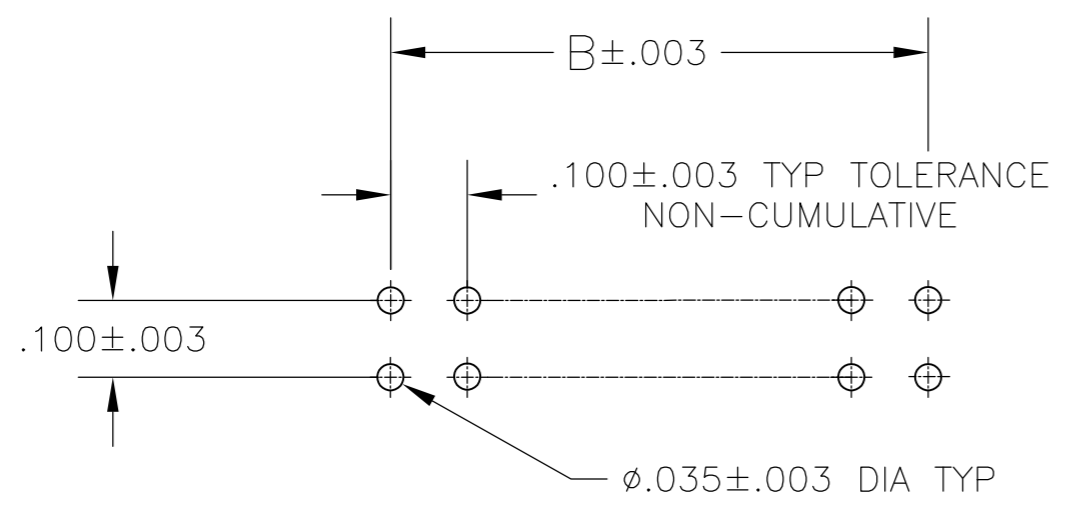


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	M		REVISED PER ECO-14-000068	23APR2014	NK	MM

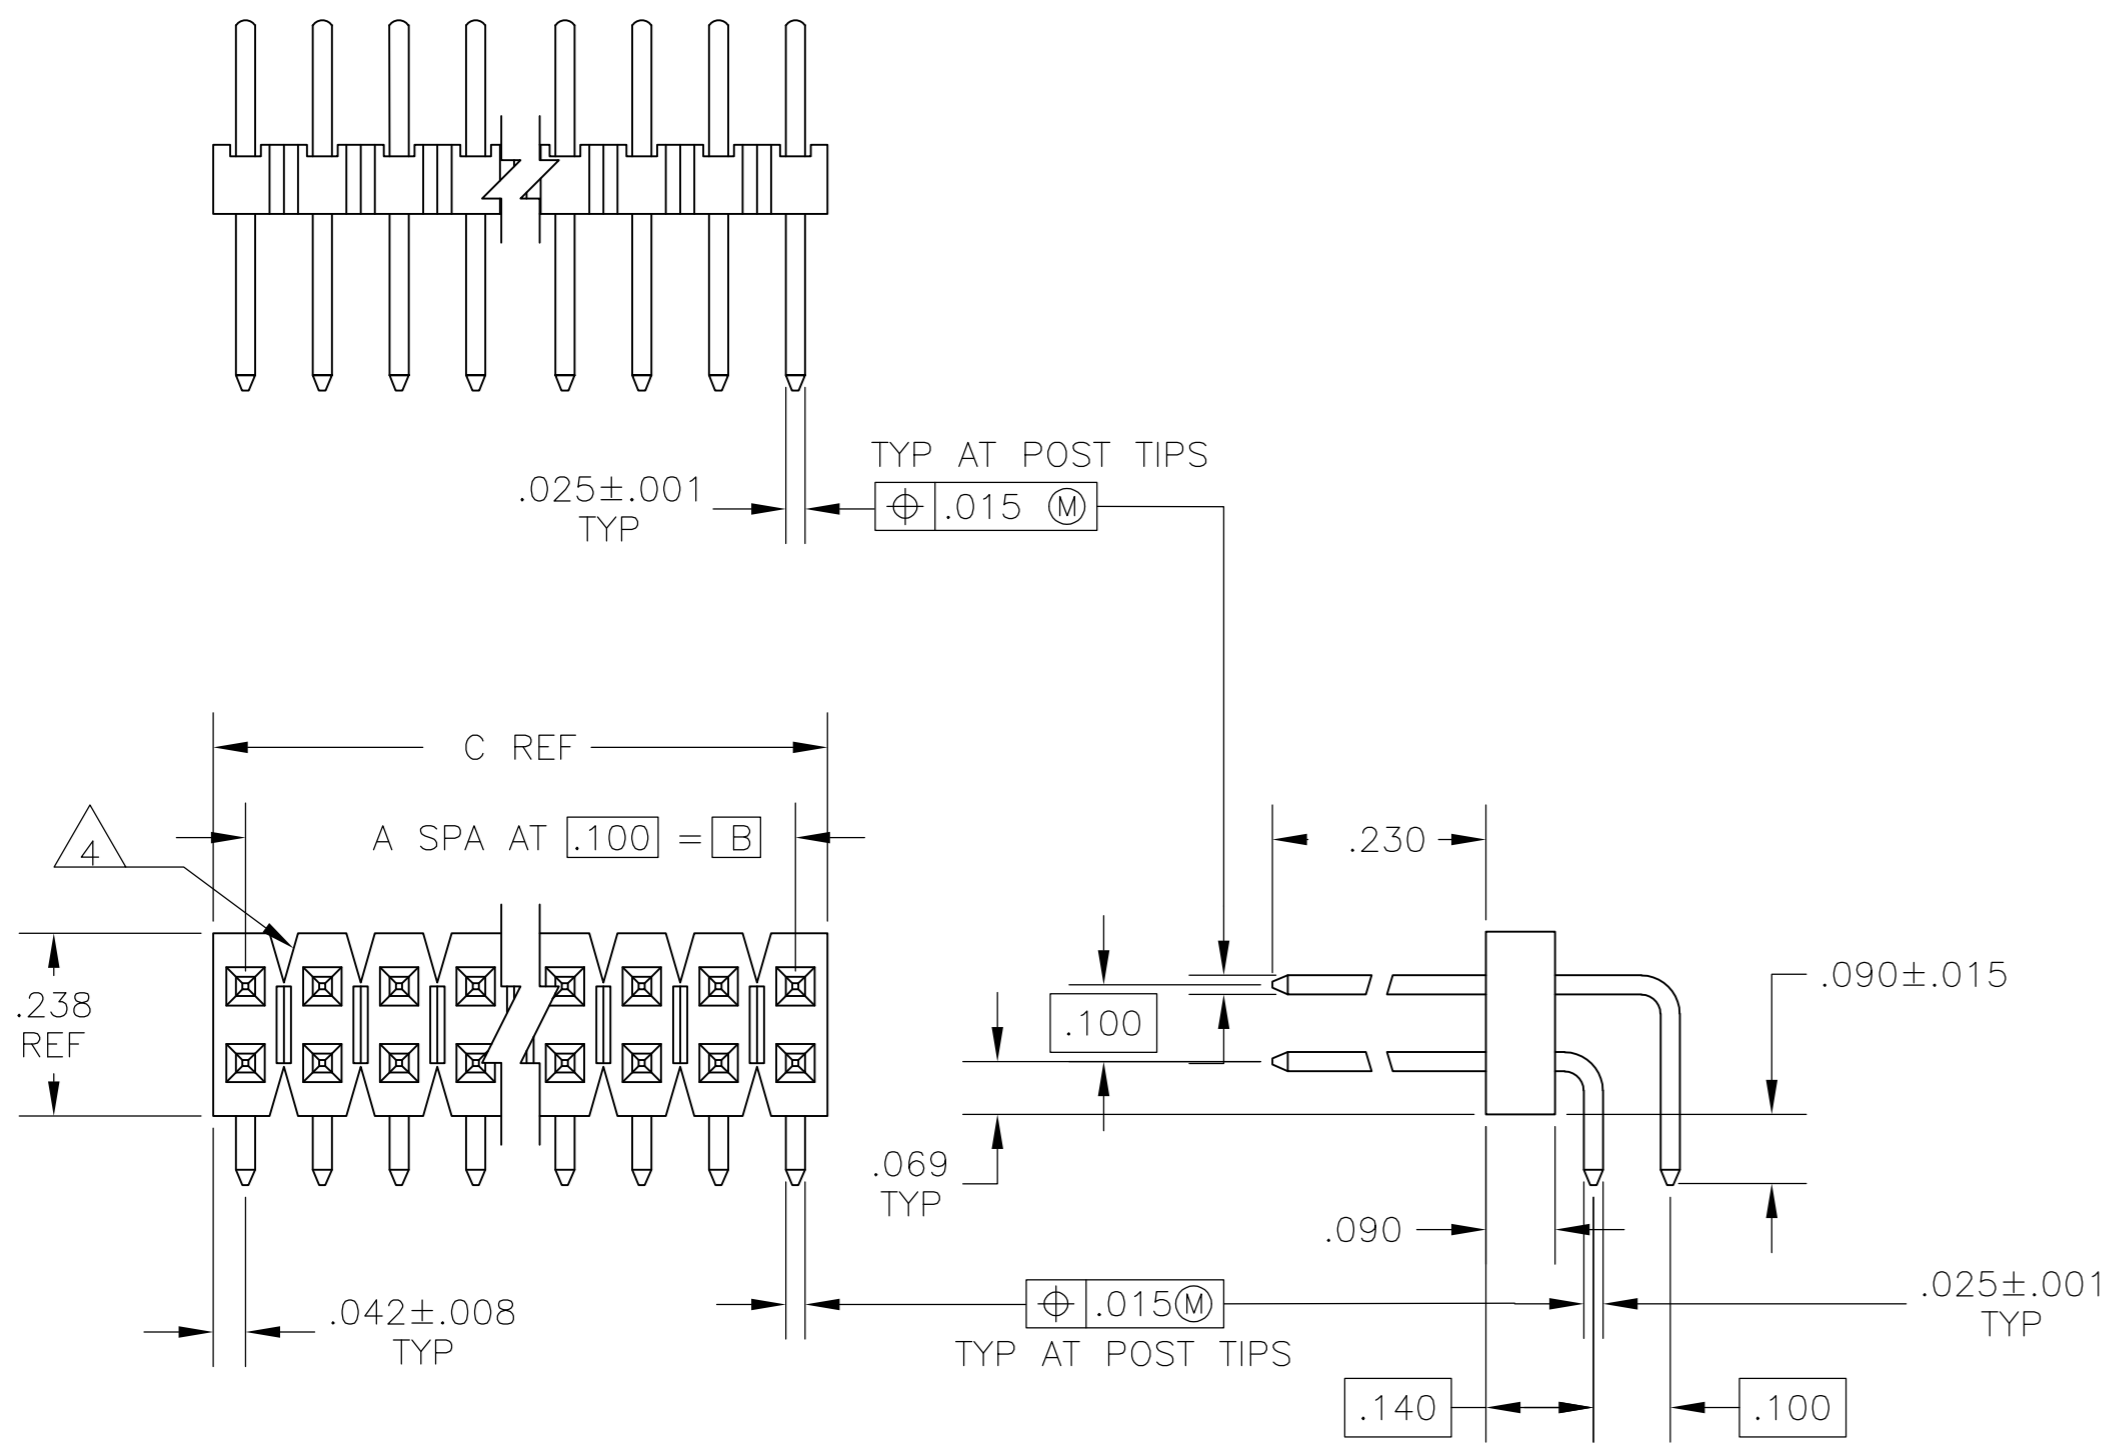

- 1 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3  $\triangle$  .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4  $\triangle$  BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5  $\triangle$  .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 6  $\triangle$  PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7  $\triangle$  .000100-.000200 MATTE TIN OVER .000050 NICKEL ENTIRE POST
- 8  $\triangle$  HIGH TEMP CONFIGURATION
- 9  $\triangle$  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	30JUL85	<b>TE</b> TE Connectivity																	
DIMENSIONS: INCHES		CHK	27AUG03																		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	27AUG03																		
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>.005</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±		-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	.005	4 PLC	±	-	ANGLES	±	-	NAME
0 PLC	±	-																			
1 PLC	±	-																			
2 PLC	±	-																			
3 PLC	±	.005																			
4 PLC	±	-																			
ANGLES	±	-																			
MATERIAL CONTACT: COPPER ALLOY	FINISH SEE TABLE	WEIGHT	-	SIZE	A2	CAGE CODE	00779	DRAWING NO	C=103795	RESTRICTED TO	-										
		CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 2	REV	M												

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
OBSOLETE		3.984	3.900	39	80	9-103795-0
OBSOLETE		3.884	3.800	38	78	8-103795-9
OBSOLETE		3.784	3.700	37	76	8-103795-8
OBSOLETE		3.684	3.600	36	74	8-103795-7
OBSOLETE		3.584	3.500	35	72	8-103795-6
OBSOLETE		3.484	3.400	34	70	8-103795-5
OBSOLETE		3.284	3.300	33	68	8-103795-4
OBSOLETE		3.284	3.200	32	66	8-103795-3
OBSOLETE		3.184	3.100	31	64	8-103795-2
OBSOLETE		3.084	3.000	30	62	8-103795-1
OBSOLETE		2.984	2.900	29	60	8-103795-0
OBSOLETE		2.884	2.800	28	58	7-103795-9
OBSOLETE		2.784	2.700	27	56	7-103795-8
OBSOLETE		2.684	2.600	26	54	7-103795-7
OBSOLETE		2.584	2.500	25	52	7-103795-6
OBSOLETE		2.484	2.400	24	50	7-103795-5
OBSOLETE		2.384	2.300	23	48	7-103795-4
OBSOLETE		2.284	2.200	22	46	7-103795-3
OBSOLETE		2.184	2.100	21	44	7-103795-2
OBSOLETE		2.084	2.000	20	42	7-103795-1
OBSOLETE		1.984	1.900	19	40	7-103795-0
OBSOLETE		1.884	1.800	18	38	6-103795-9
OBSOLETE		1.784	1.700	17	36	6-103795-8
OBSOLETE		1.684	1.600	16	34	6-103795-7
OBSOLETE		1.584	1.500	15	32	6-103795-6
OBSOLETE		1.484	1.400	14	30	6-103795-5
OBSOLETE		1.384	1.300	13	28	6-103795-4
OBSOLETE		1.284	1.200	12	26	6-103795-3
OBSOLETE		1.184	1.100	11	24	6-103795-2
OBSOLETE		1.084	1.000	10	22	6-103795-1
OBSOLETE		.984	.900	9	20	6-103795-0
OBSOLETE		.884	.800	8	18	5-103795-9
OBSOLETE		.784	.700	7	16	5-103795-8
OBSOLETE		.684	.600	6	14	5-103795-7
OBSOLETE		.584	.500	5	12	5-103795-6
OBSOLETE		.484	.400	4	10	5-103795-5
OBSOLETE		.384	.300	3	8	5-103795-4
OBSOLETE		.284	.200	2	6	5-103795-3
OBSOLETE		.184	.100	1	4	5-103795-2
OBSOLETE		.084			2	5-103795-1

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
		.384	.300	3	8	4-103795-1
		3.984	3.900	39	80	4-103795-0
		3.884	3.800	38	78	3-103795-9
		3.784	3.700	37	76	3-103795-8
		3.684	3.600	36	74	3-103795-7
		3.584	3.500	35	72	3-103795-6
		3.484	3.400	34	70	3-103795-5
		3.284	3.300	33	68	3-103795-4
		3.284	3.200	32	66	3-103795-3
		3.184	3.100	31	64	3-103795-2
		3.084	3.000	30	62	3-103795-1
		2.984	2.900	29	60	3-103795-0
		2.884	2.800	28	58	2-103795-9
		2.784	2.700	27	56	2-103795-8
		2.684	2.600	26	54	2-103795-7
		2.584	2.500	25	52	2-103795-6
		2.484	2.400	24	50	2-103795-5
		2.384	2.300	23	48	2-103795-4
		2.284	2.200	22	46	2-103795-3
		2.184	2.100	21	44	2-103795-2
		2.084	2.000	20	42	2-103795-1
		1.984	1.900	19	40	2-103795-0
		1.884	1.800	18	38	1-103795-9
		1.784	1.700	17	36	1-103795-8
SUPERSEDED		1.684	1.600	16	34	1-103795-7
		1.584	1.500	15	32	1-103795-6
		1.484	1.400	14	30	1-103795-5
		1.384	1.300	13	28	1-103795-4
		1.284	1.200	12	26	1-103795-3
		1.184	1.100	11	24	1-103795-2
		1.084	1.000	10	22	1-103795-1
		.984	.900	9	20	1-103795-0
		.884	.800	8	18	103795-9
		.784	.700	7	16	103795-8
SUPERSEDED		.684	.600	6	14	103795-7
		.584	.500	5	12	103795-6
		.484	.400	4	10	103795-5
		.384	.300	3	8	103795-4
		.284	.200	2	6	103795-3
		.184	.100	1	4	103795-2
		.084			2	103795-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. D. RINGLEY 30JUL85	 TE Connectivity	ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS		
CHK J. GESFORD 27AUG03		NAME	RESTRICTED TO	
APVD J. GESFORD 27AUG03		PRODUCT SPEC	SIZE	CAGE CODE
APPLICATION SPEC		WEIGHT	DRAWING NO	REV
MATERIAL -	FINISH SEE TABLE	SCALE 1:1	SHEET 2 OF 2	
CUSTOMER DRAWING		A2 00779 C=103795		