THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REVISED PER ECO-14-015251	09OCT2014	NK	MM

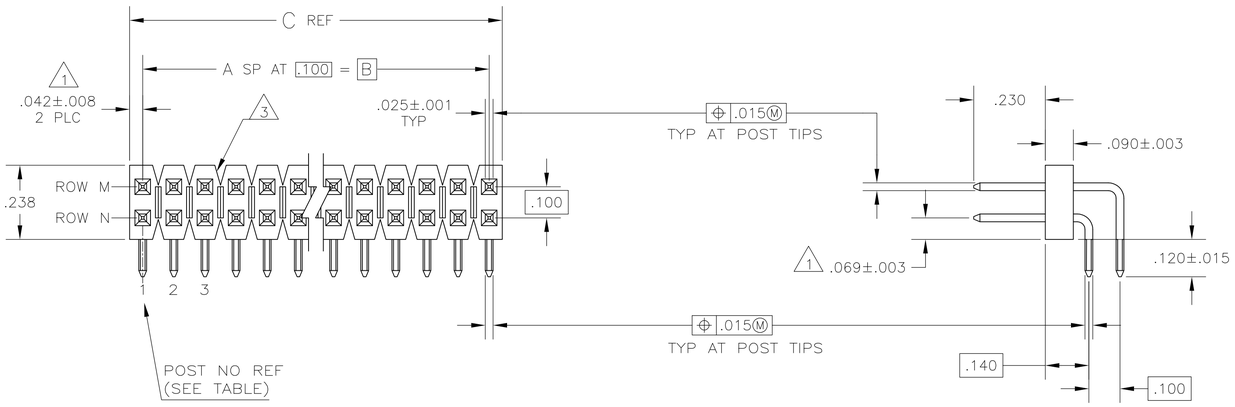

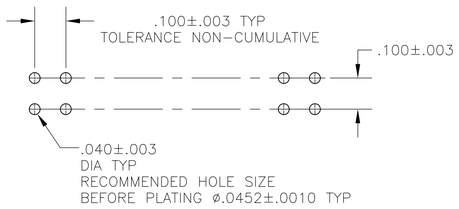

RECOMMENDED HOLE LAYOUT

1. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
2. FOR ACTIVE POSITION SIZES 4 AND ABOVE, POSTS WILL BE SELECTIVELY SWAGED TO PROVIDE CONNECTOR RETENTION TO THE PC BOARD UNTIL SOLDERED. FOR POSITION SIZE 2, POSTS WILL BE KINKED.(SEE TABLE FOR RETENTION FEATURE LOCATION).
3. BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT.
4. .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL, ON ENTIRE POST.
5. .000100-.000200 BRIGHT TIN OVER .000050 NICKEL, ON ENTIRE POST.
6. .000100-.000200 MATTE TIN OVER .000050 NICKEL, ON ENTIRE POST.
7. HIGH TEMPERATURE CONFIGURATION.
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

REMARKS	PLATING	ROW N (HOLD-DOWN POST CONFIG LOCATION)	ROW M (HOLD-DOWN POST CONFIG LOCATION)	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
	7 6	1,2,39,40	1,2,39,40	3.984	3.900	39	80	7-104355-0
	7 6	1,2,29,30	1,2,29,30	2.984	2.900	29	60	6-104355-9
	7 6	1,2,24,25	1,2,24,25	2.484	2.400	24	50	6-104355-8
	7 6	1,2,19,20	1,2,19,20	1.984	1.900	19	40	6-104355-7
	7 6	1,2,16,17	1,2,16,17	1.684	1.600	16	34	6-104355-6
	7 6	1,2,14,15	1,2,14,15	1.484	1.400	14	30	6-104355-5
	7 6	1,2,13,14	1,2,13,14	1.384	1.300	13	28	6-104355-4
8 OBSOLETE	7 6	1,2,12,13	1,2,12,13	1.284	1.200	12	26	6-104355-3
	7 6	1,2,11,12	1,2,11,12	1.184	1.100	11	24	6-104355-2
	7 6	1,2,10,11	1,2,10,11	1.084	1.000	10	22	6-104355-1
	7 6	1,2,9,10	1,2,9,10	.984	.900	9	20	6-104355-0
	7 6	1,2,8,9	1,2,8,9	.884	.800	8	18	5-104355-9
	7 6	1,2,7,8	1,2,7,8	.784	.700	7	16	5-104355-8
	7 6	1,2,6,7	1,2,6,7	.684	.600	6	14	5-104355-7
	7 6	1,2,5,6	1,2,5,6	.584	.500	5	12	5-104355-6
	7 6	1,2,4,5	1,2,4,5	.484	.400	4	10	5-104355-5
	7 6	1,2,3,4	1,2,3,4	.384	.300	3	8	5-104355-4
8 OBSOLETE	7 6	1,2,3	1,2,3	.284	.200	2	6	5-104355-3
	7 6	1,2	1,2	.184	.100	1	4	5-104355-2
OBSOLETE	4	1,2,39,40	1,2,39,40	3.984	3.900	39	80	2-104355-0
8 OBSOLETE	4	1,2,29,30	1,2,29,30	2.984	2.900	29	60	1-104355-9
OBSOLETE	4	1,2,24,25	1,2,24,25	2.484	2.400	24	50	1-104355-8
	4	1,2,19,20	1,2,19,20	1.984	1.900	19	40	1-104355-7
	4	1,2,16,17	1,2,16,17	1.684	1.600	16	34	1-104355-6
8 OBSOLETE	4	1,2,14,15	1,2,14,15	1.484	1.400	14	30	1-104355-5
	4	1,2,13,14	1,2,13,14	1.384	1.300	13	28	1-104355-4
	4	1,2,12,13	1,2,12,13	1.284	1.200	12	26	1-104355-3
	4	1,2,11,12	1,2,11,12	1.184	1.100	11	24	1-104355-2
	4	1,2,10,11	1,2,10,11	1.084	1.000	10	22	1-104355-1
	4	1,2,9,10	1,2,9,10	.984	.900	9	20	1-104355-0
	4	1,2,8,9	1,2,8,9	.884	.800	8	18	104355-9
8 OBSOLETE	4	1,2,7,8	1,2,7,8	.784	.700	7	16	104355-8
	4	1,2,6,7	1,2,6,7	.684	.600	6	14	104355-7
	4	1,2,5,6	1,2,5,6	.584	.500	5	12	104355-6
	4	1,2,4,5	1,2,4,5	.484	.400	4	10	104355-5
	4	1,2,3,4	1,2,3,4	.384	.300	3	8	104355-4
	5	1,2,3	1,2,3	.284	.200	2	6	104355-3
	4	1,2	1,2	.184	.100	1	4	104355-2
OBSOLETE	4	1	1	.084	-	-	2	104355-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: HOUSING
POST: COPPER ALLOY

FINISH: SEE TABLE

DWN M. PASTAL	04FEB88
CHK R. FEIDT	09FEB88
APVD R. ELICKER	09FEB88
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

TE Connectivity

NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE ROW, .100X.100

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-104355	-

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	L

4805 (3/11)