

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

2011

© COPYRIGHT 2011

ALL RIGHTS RESERVED.


| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|-------------|-----------|----------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| AI | - | BA | NEW DRAWING | 08MAR2012 | DMS ST.P |

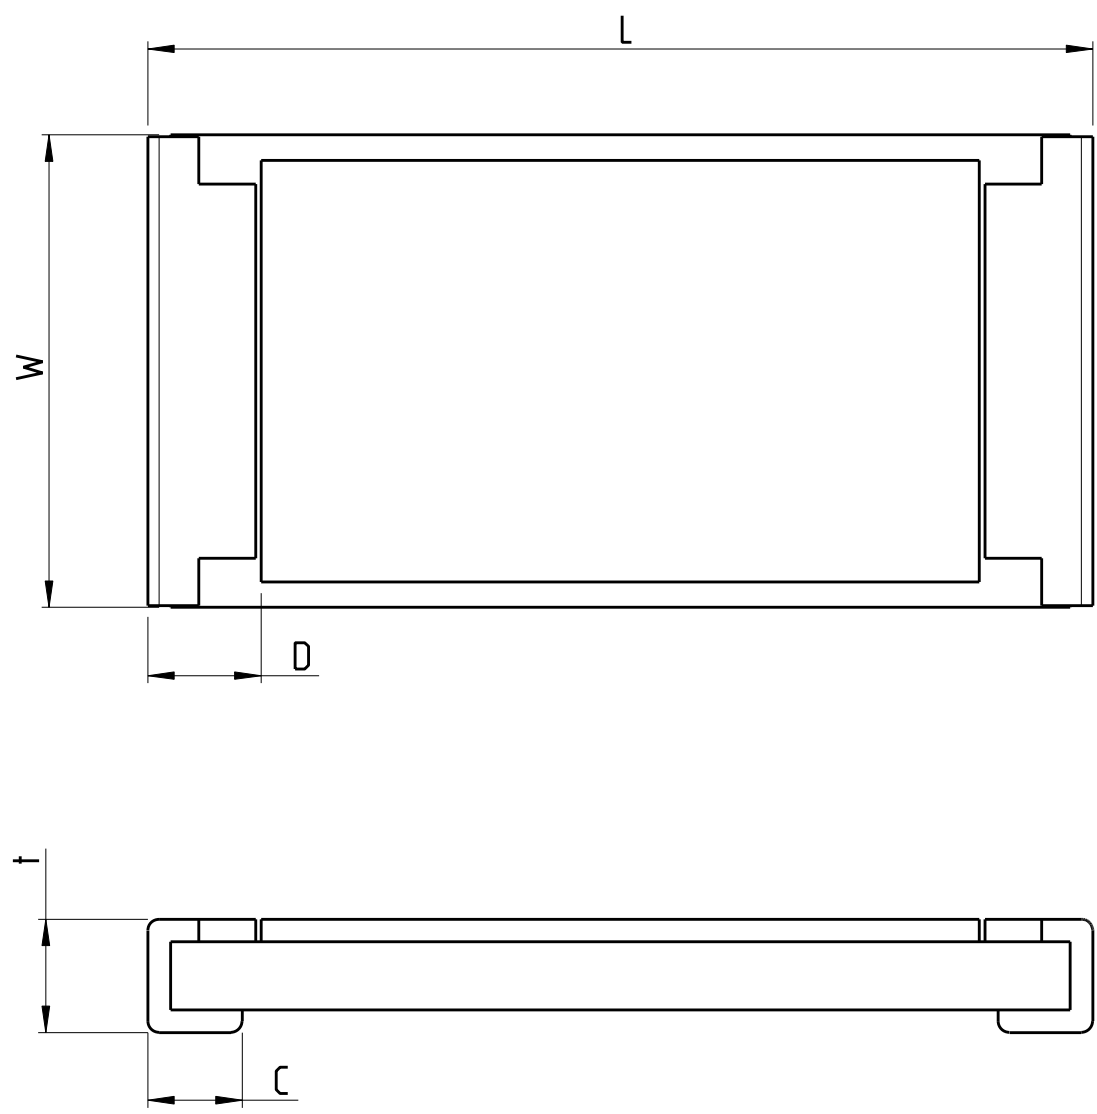


| TYPE | L | W | C | D | t |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 1H (0201) | 0.58±0.05 | 0.29±0.05 | 0.15±0.05 | 0.12±0.05 | 0.23±0.05 |
| 1E (0402) | 1.00±0.05 | 0.50±0.05 | 0.20±0.10 | 0.25±0.10 | 0.32±0.10 |
| 1J (0603) | 1.60±0.10 | 0.80±0.10 | 0.30±0.20 | 0.30±0.20 | 0.45±0.10 |
| 2A (0805) | 2.00±0.15 | 1.25±0.15 | 0.40±0.25 | 0.30±0.20 | 0.55±0.10 |
| 2B (1206) | 3.10±0.10 | 1.55±0.15 | 0.40±0.25 | 0.50±0.30 | 0.55±0.10 |
| 2E (1210) | 3.10±0.10 | 2.50±0.15 | 0.50±0.25 | 0.50±0.30 | 0.55±0.10 |
| 2H (2010) | 5.00±0.20 | 2.50±0.15 | 0.50±0.25 | 0.60±0.30 | 0.60±0.15 |
| 3A (2512) | 6.35±0.20 | 3.10±0.15 | 0.55±0.25 | 0.60±0.30 | 0.60±0.10 |

FOR FURTHER INFORMATION SEE DATA SHEET FOR CURRENT SENSING CHIP RESISTOR - RL73 SERIES

RoHS Compliant

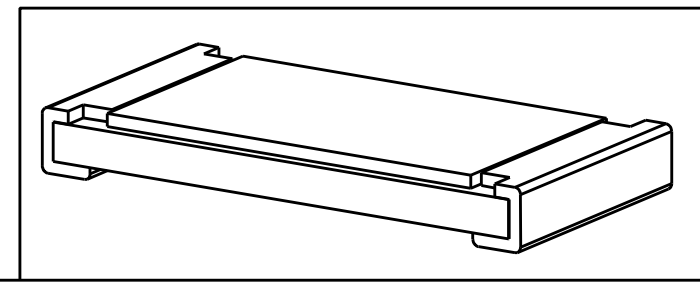

| | | | | |
|--|--|-----------------------------|---|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN 08MAR2012 DARSHAN MS |  TE Connectivity | |
| DIMENSIONS: mm | | CHK 08MAR2012 ALLAN P | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD 08MAR2012 STEPHEN.P | NAME SMD LOW OHMIC CURRENT SENSE RESISTOR RL73 SERIES | |
| 0 PLC ± | | PRODUCT SPEC | - | |
| 1 PLC ± | | APPLICATION SPEC | - | |
| 2 PLC ± | | WEIGHT | - | |
| 3 PLC ± | | SIZE | A3 | |
| 4 PLC ± | | CAGE CODE | 00779 | |
| ANGLES ±5° | | DRAWING NO | C-1622825 | |
| FINISH - | | RESTRICTED TO | - | |
| MATERIAL - | | CUSTOMER DRAWING | | SCALE 1:1 |
| | | SHEET 1 OF 1 | | REV BA |