

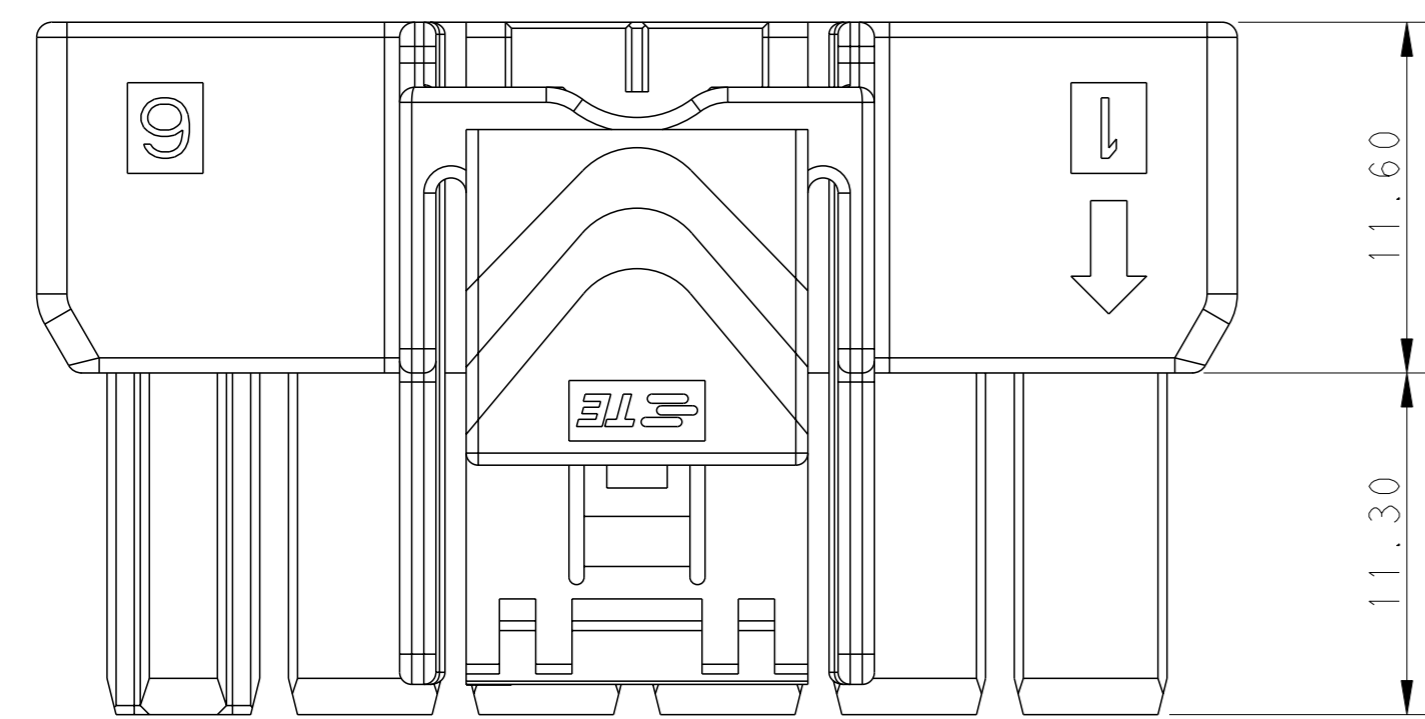
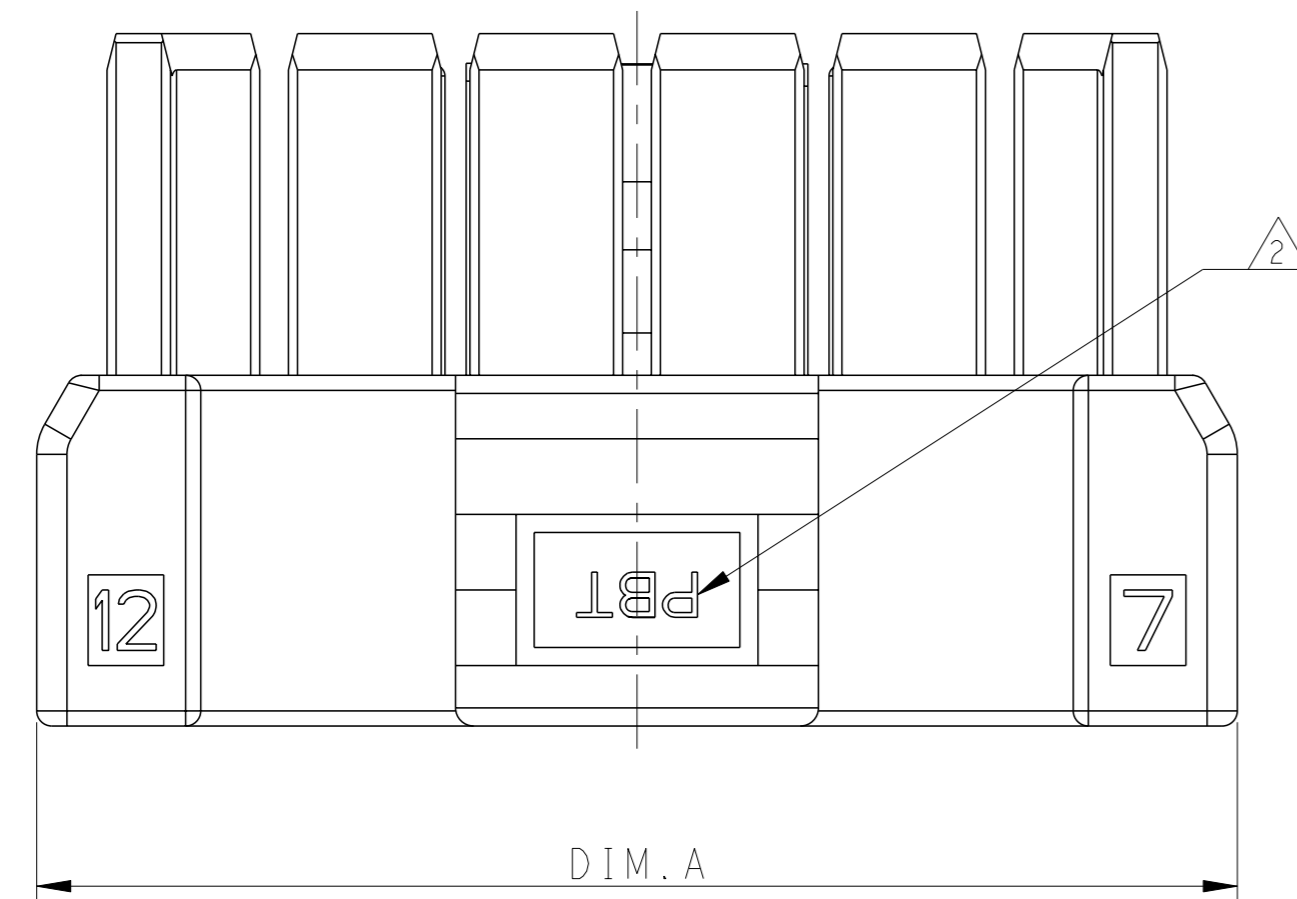
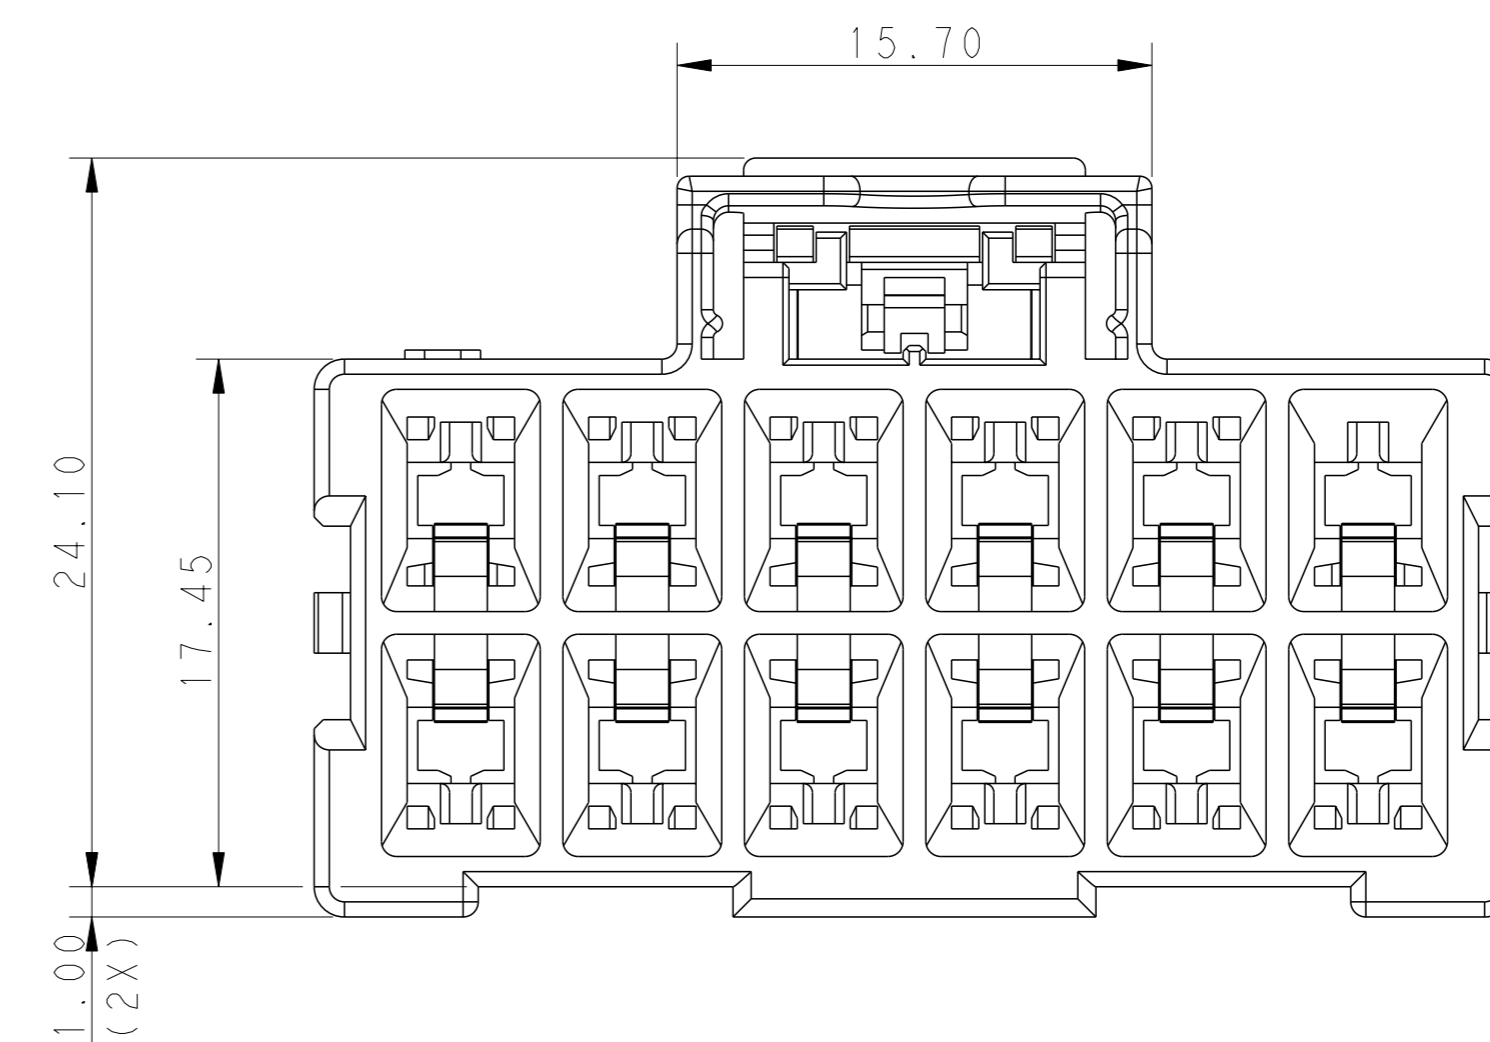


REVISIONS						
LOC	DIST	REV	DESCRIPTION	DATE	OWN	APVD
-	-	D	REVISED PER ECO-16-009784	30JUN16	RS	GJ

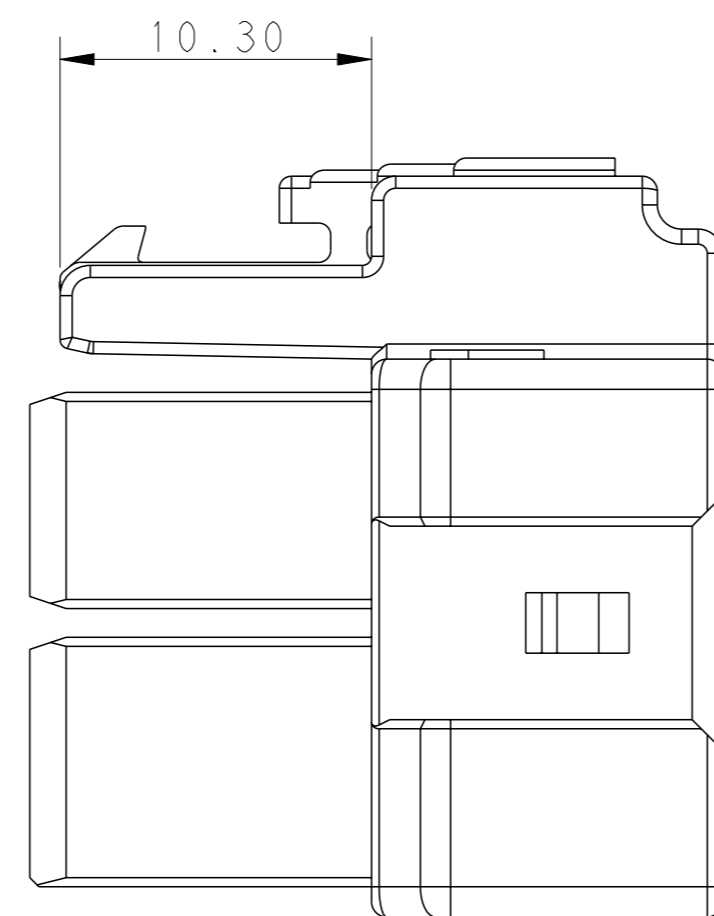

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

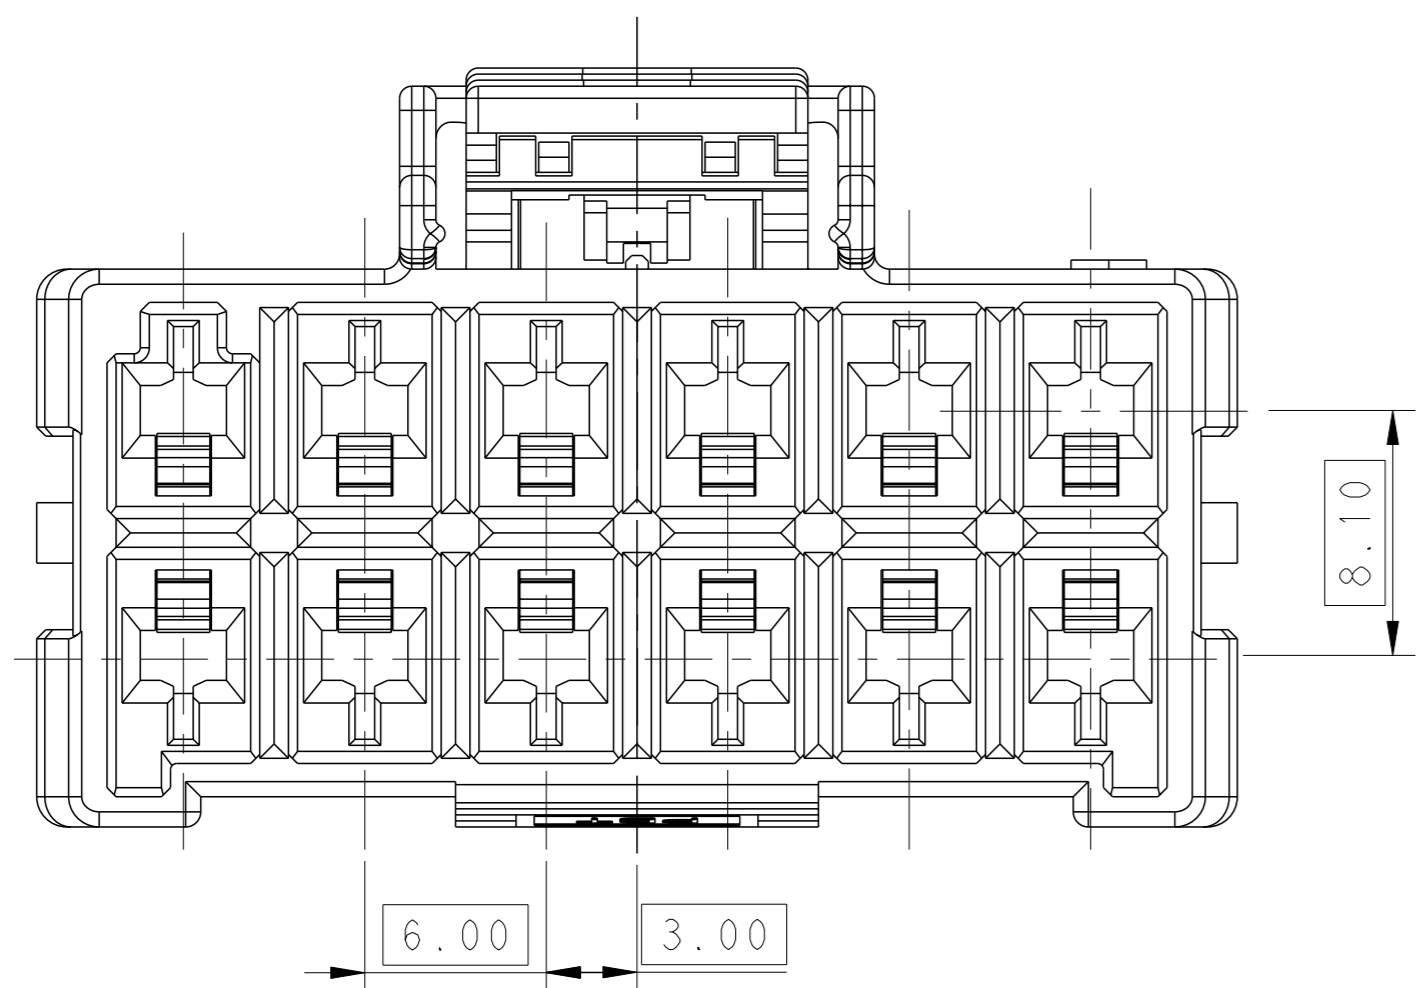

1 MATERIAL:  
 LEVEL 1:PBT,STANDARD TEMPERATURE 105°C  
 KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW  
 LEVEL 2:NYLON,HIGH TEMPERATURE 150°C  
 KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

2 MATERIAL MARK:  
 LEVEL 1:PBT,LEVEL 2:HDT



3 APPLICABLE CONTACT P/N  
 RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-\*, 2238066-\*

4 MATING CONN, P/N  
 CAP HSG: \*-1971774/5-  
 TPA (LOCKING PLATE): \*-1971778-\*



5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TOMMY WU 09JUL2012	TE Connectivity
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YIHONG MAO 09JUL2012	NAME
0 PLC ±	1 PLC ±0.35	PRODUCT SPEC	PLUG HOUSING, DOUBLE ROW
2 PLC ±0.25	3 PLC ±	APPLICATION SPEC	POWER TRIPLE LOCK
4 PLC ±	ANGLES ±	SIZE	108-106118
FINISH		CAGE CODE	114-106118
		DRAWING NO	100779
		WEIGHT	C=1971776
		Customer Drawing	RESTRICTED TO
		SCALE 4:1	SHEET 1 OF 2
			REV D



LOC	DIST	REVISIONS			
P	LYR	DESCRIPTION	DATE	OWN	APVD
-	-	SEE SHEET 1	-	-	-

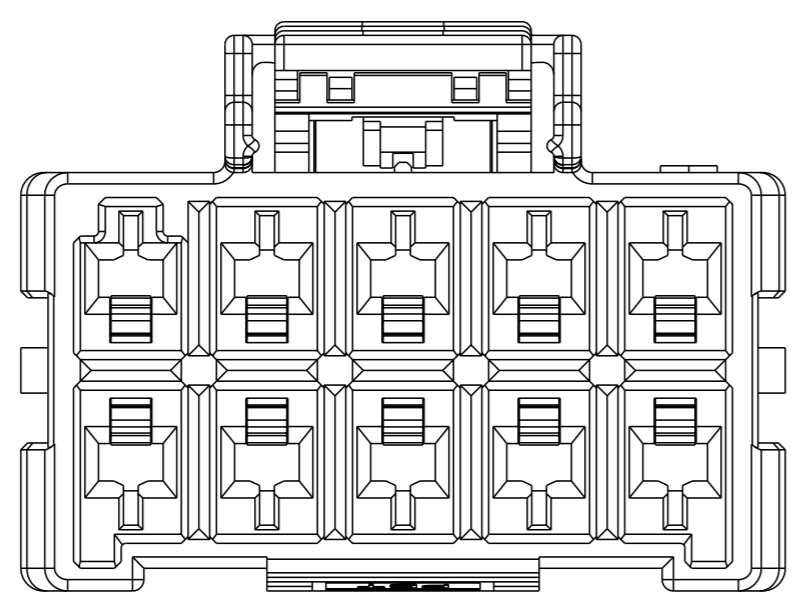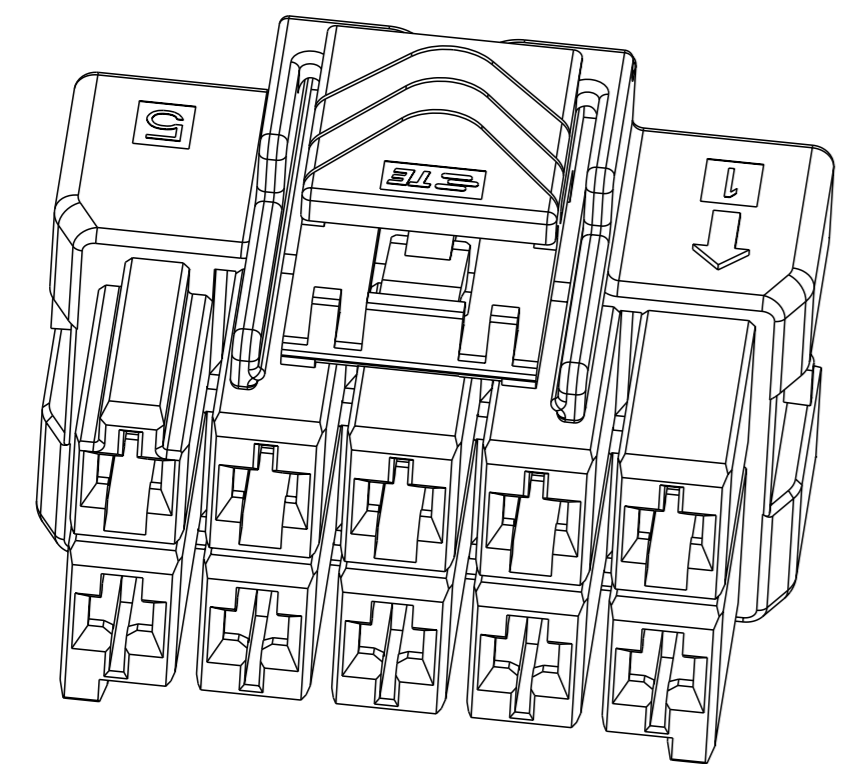


2\*5 POSITIONS

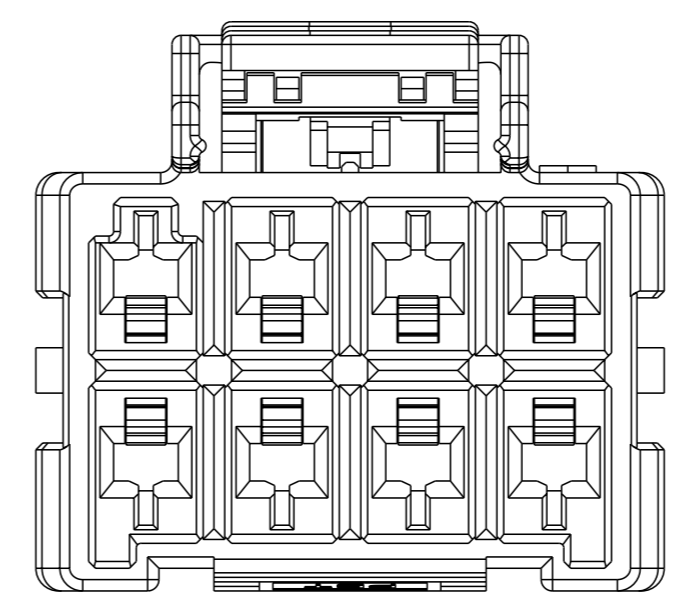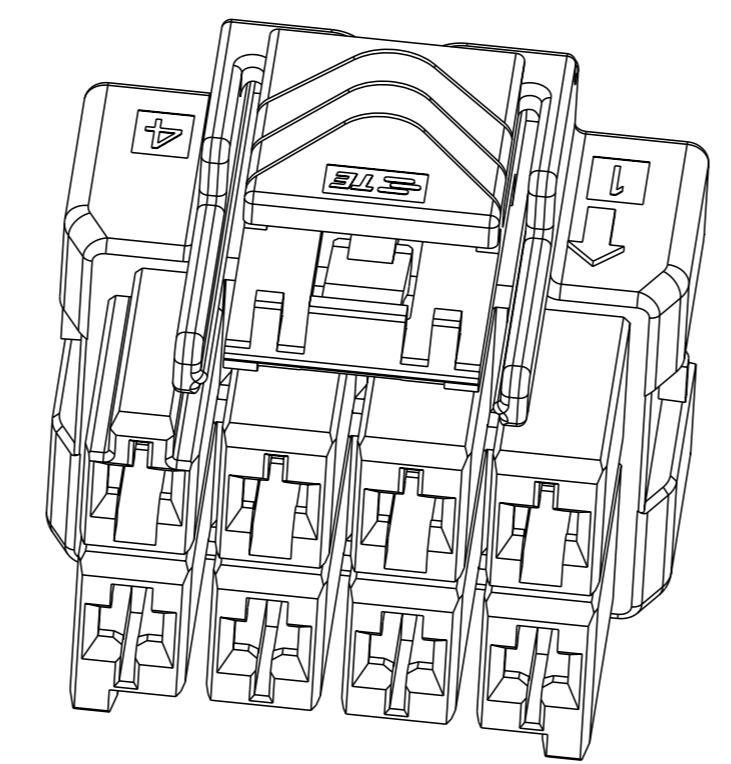


2\*4 POSITIONS

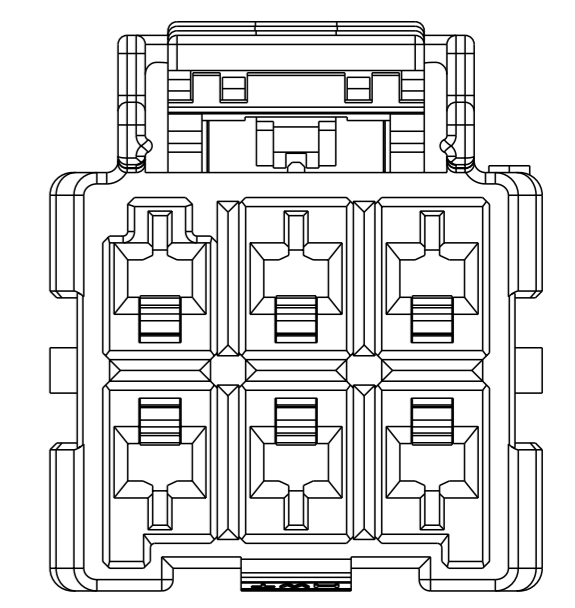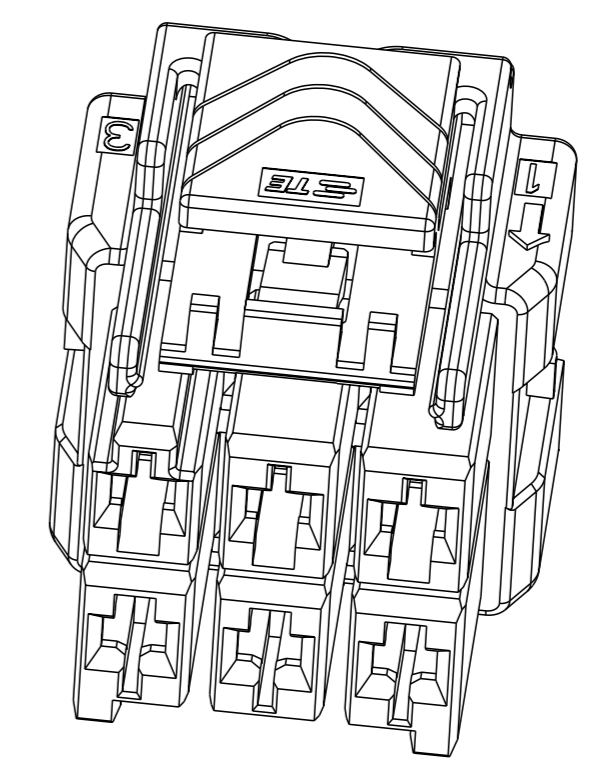


2\*3 POSITIONS

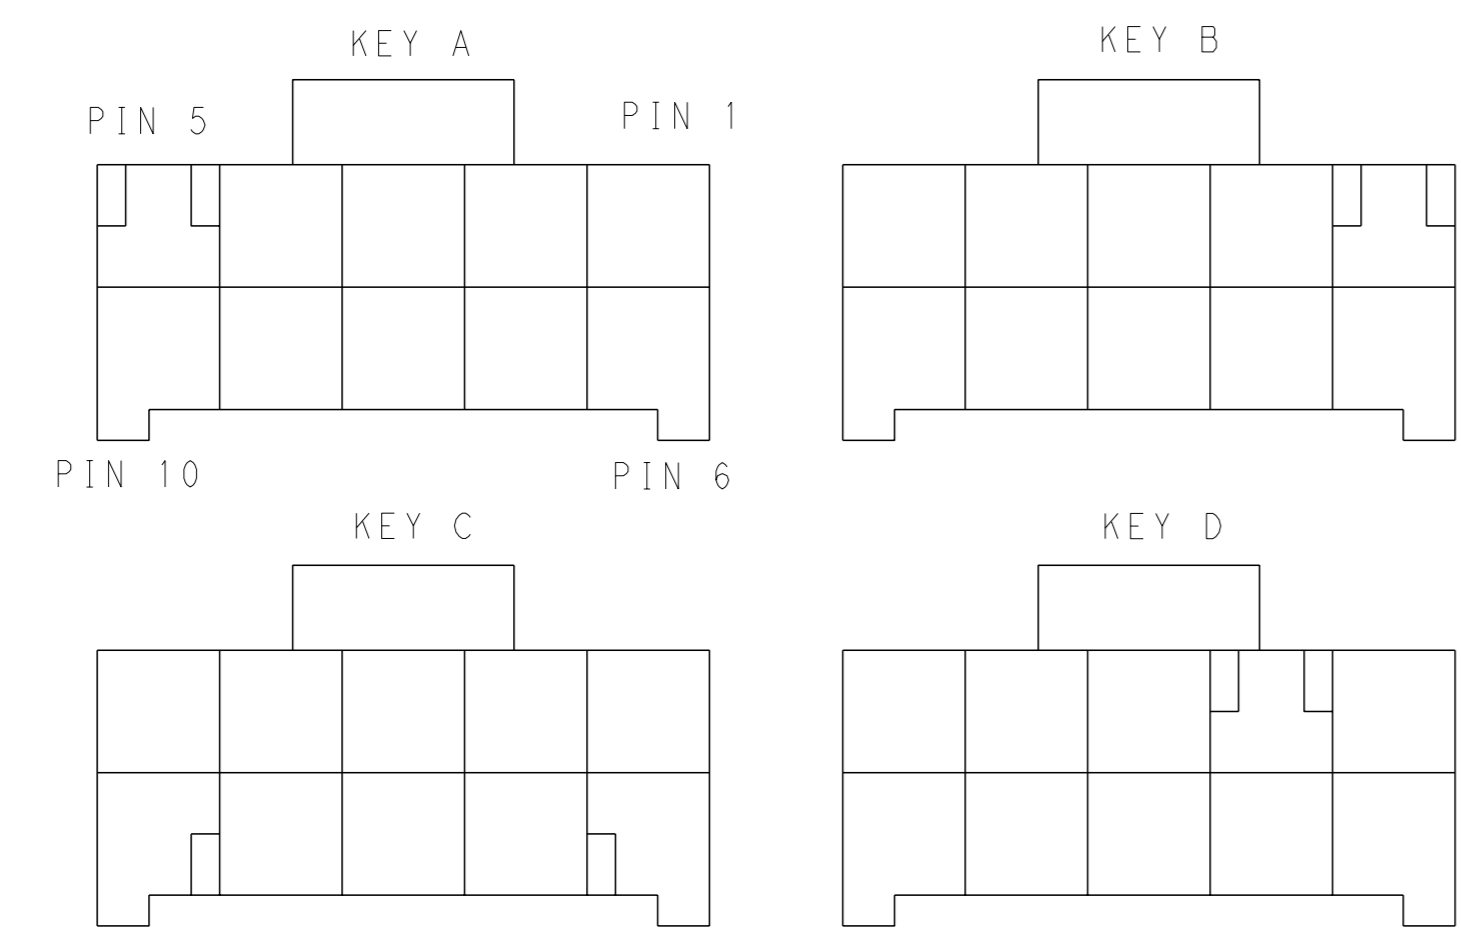



KEYING FOR 2\*5 POS.

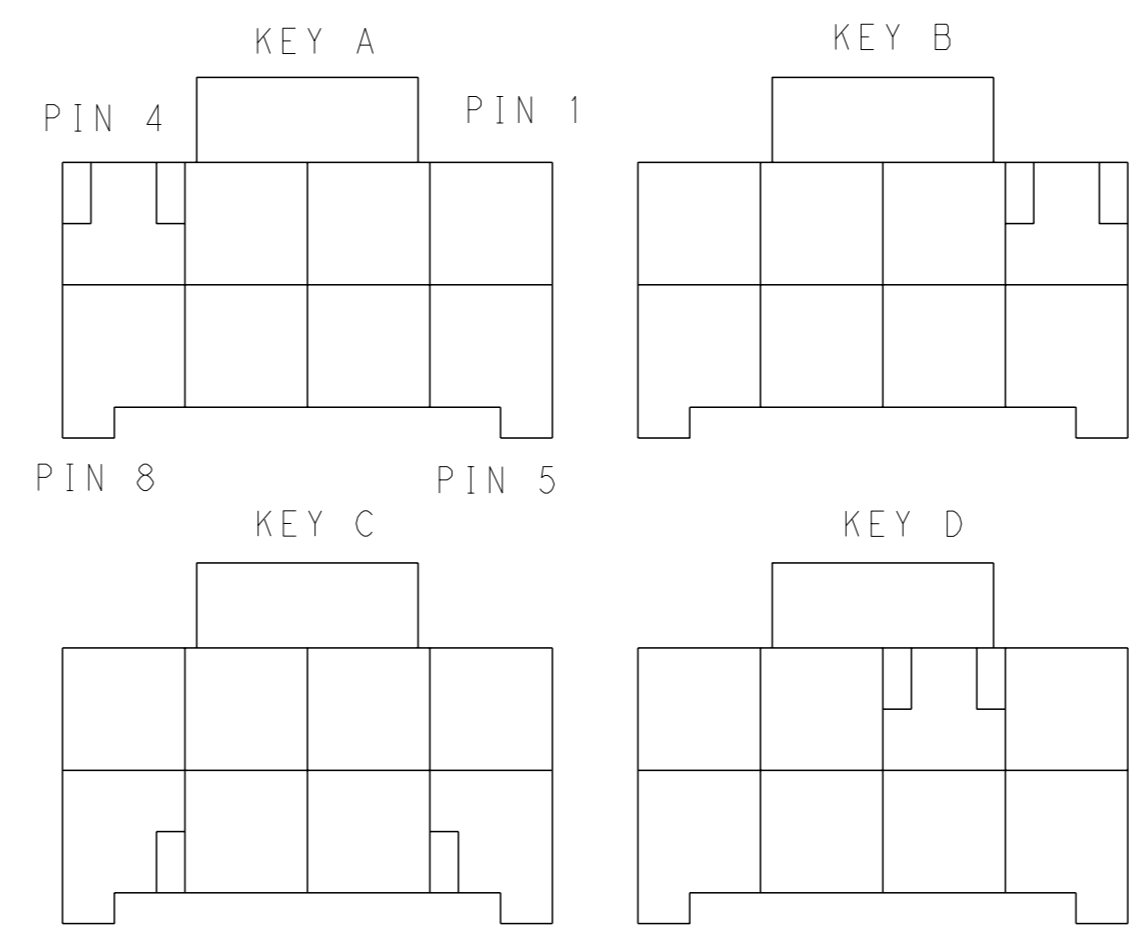


KEYING FOR 2\*4 POS.

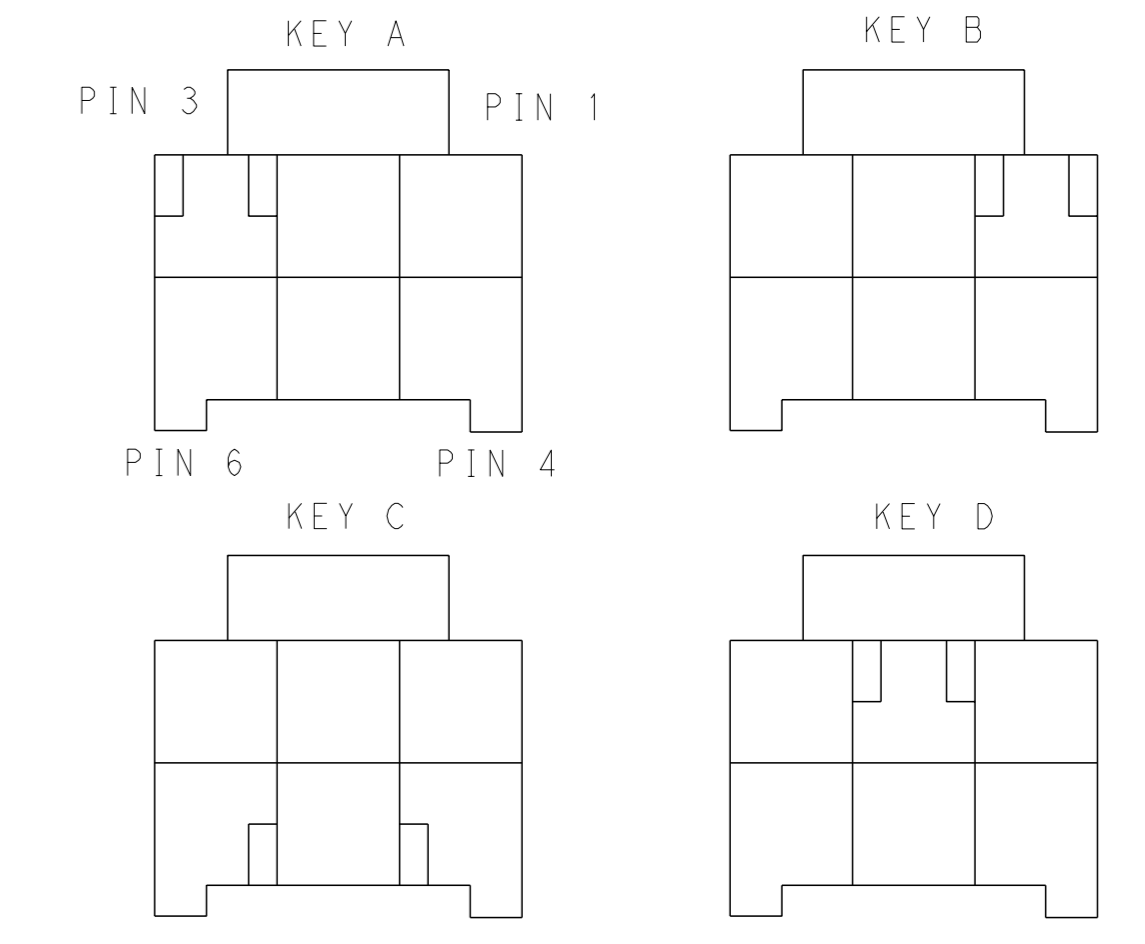

KEYING FOR 2\*3 POS.

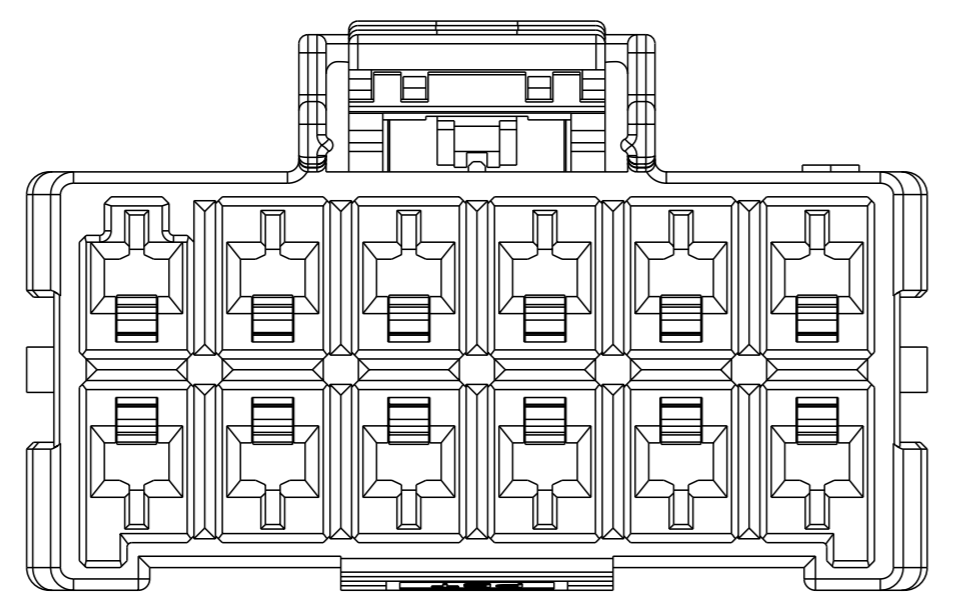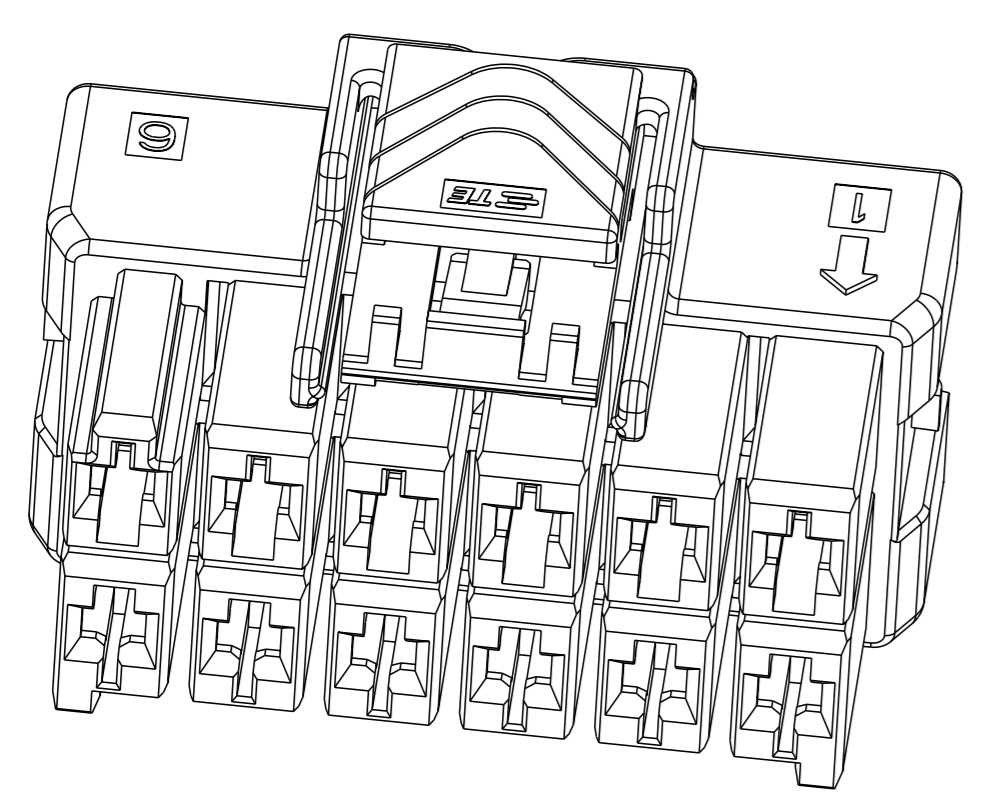

2\*6 POSITIONS

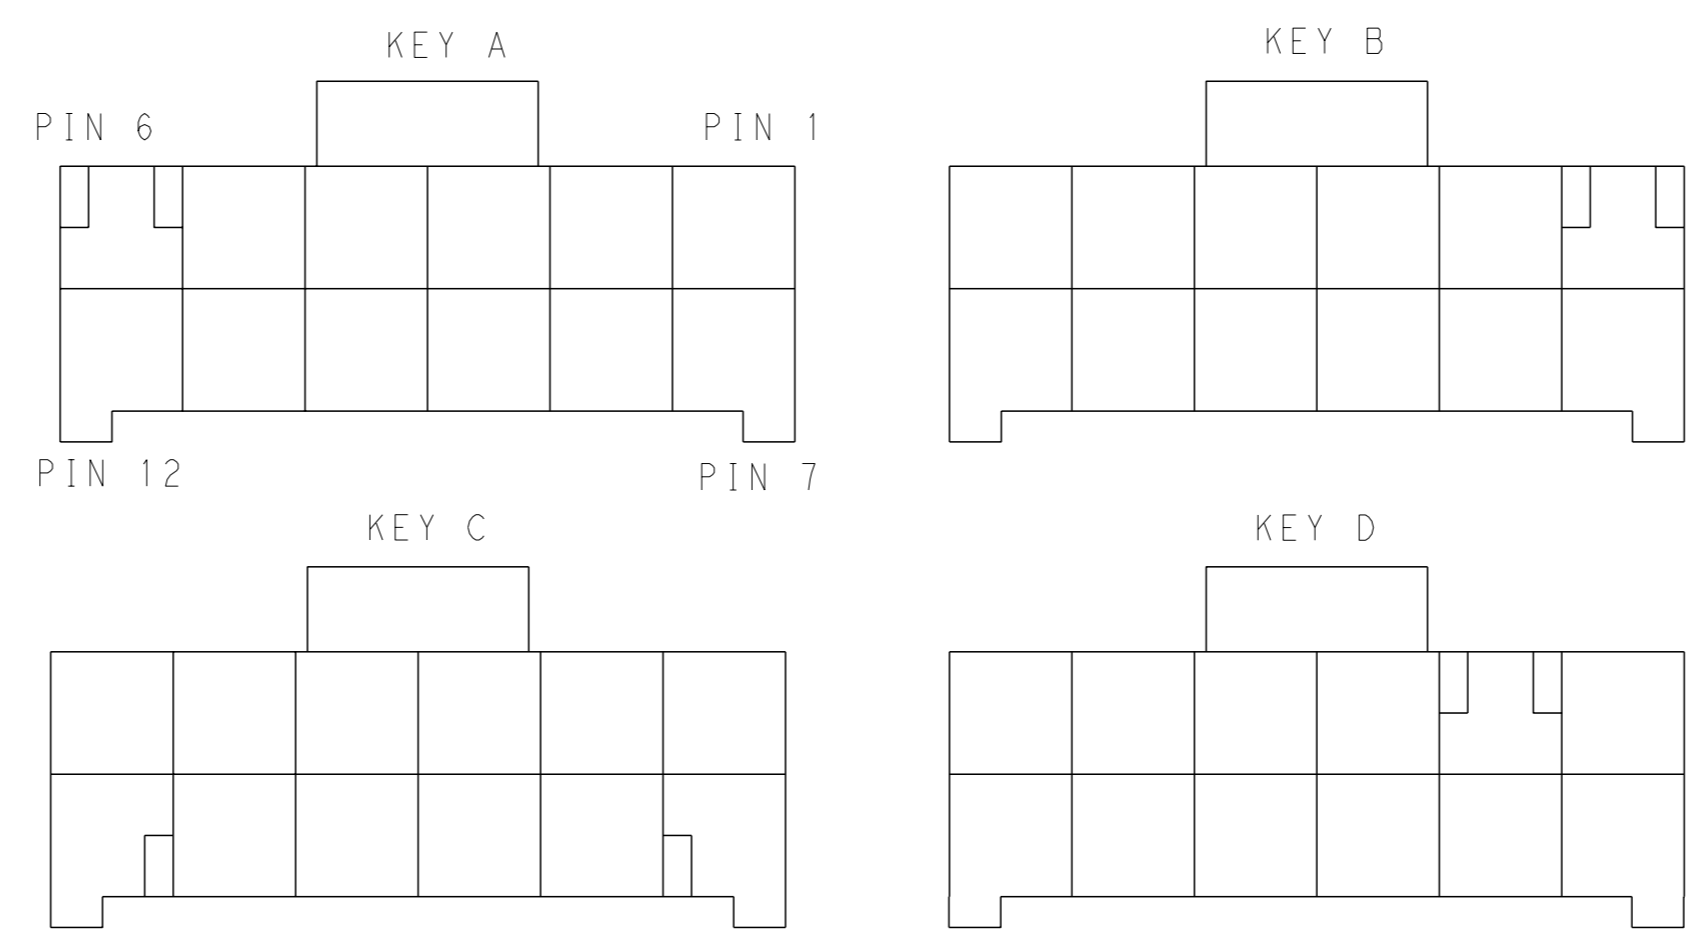

KEYING FOR 2\*6 POS.

POS.	MATERIAL	KEY	P/N
2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
2*6	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
2*5	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5

POS.	MATERIAL	KEY	P/N
2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
2*4	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
2*3	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: TOMMY WU 09JUL2012  
 CHK: HAPYE WU 09JUL2012  
 APVD: YUHONG MAO 09JUL2012

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±.  
 1 PLC ±0.35  
 2 PLC ±0.25  
 3 PLC ±.  
 4 PLC ±.  
 ANGLES FINISH ±.

MATERIAL: .

Customer Drawing

SCALE: 4:1 SHEET 2 OF 2 REV D

STE TE Connectivity

NAME: PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 1971776