

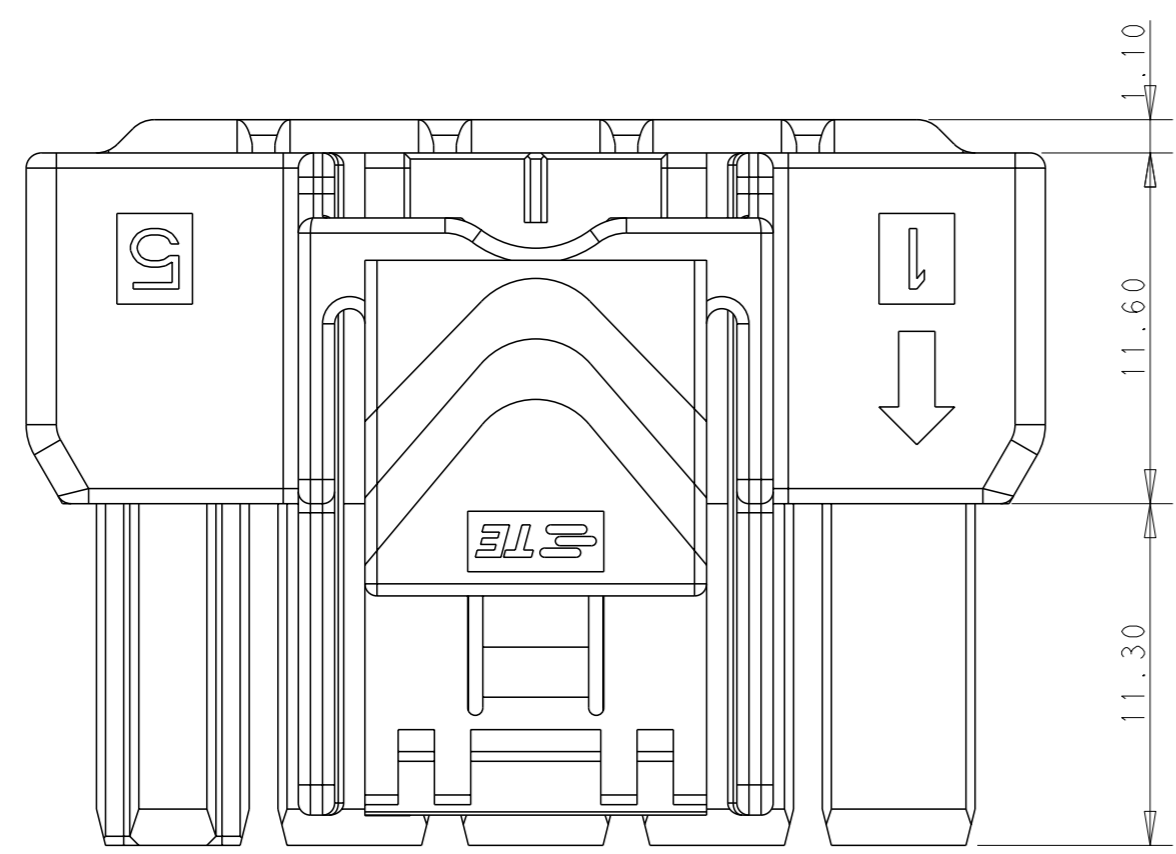
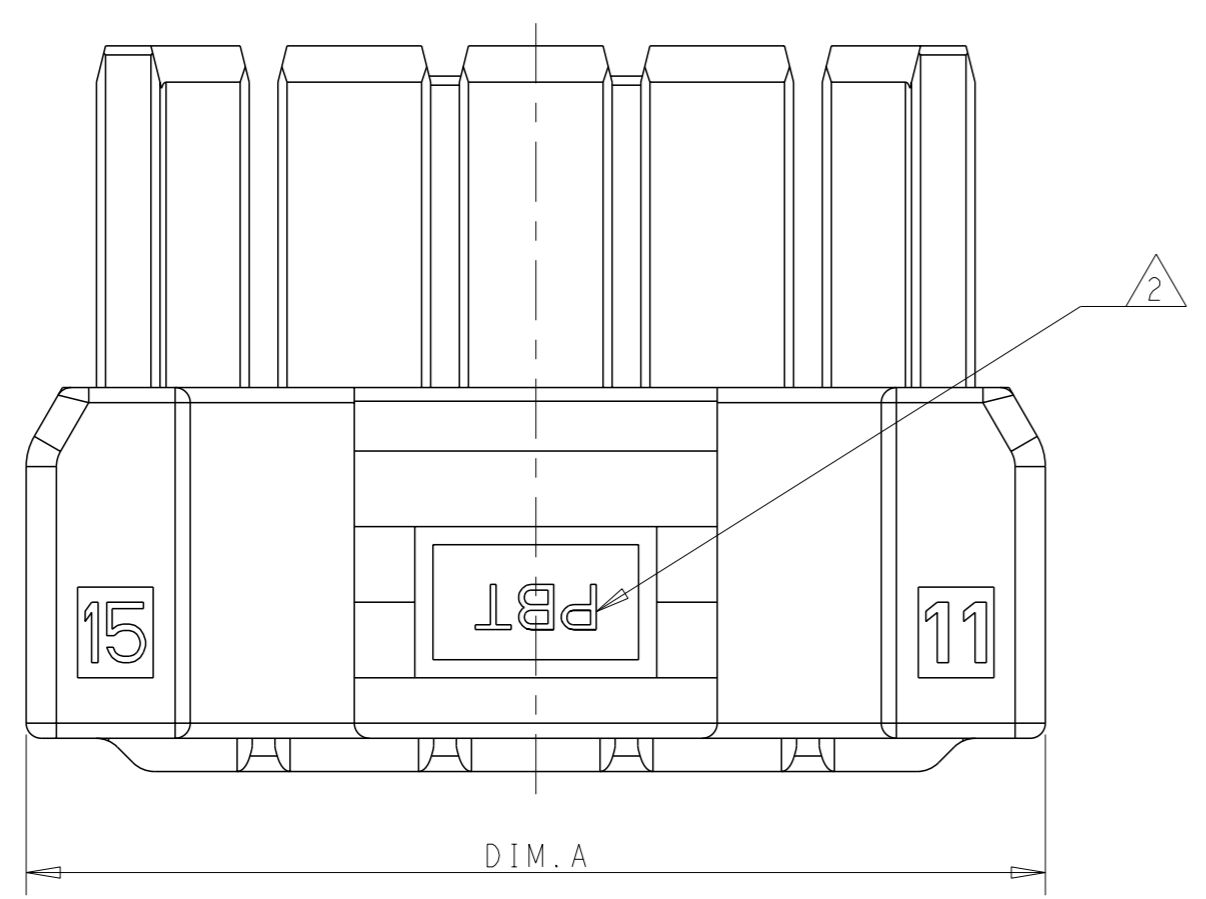
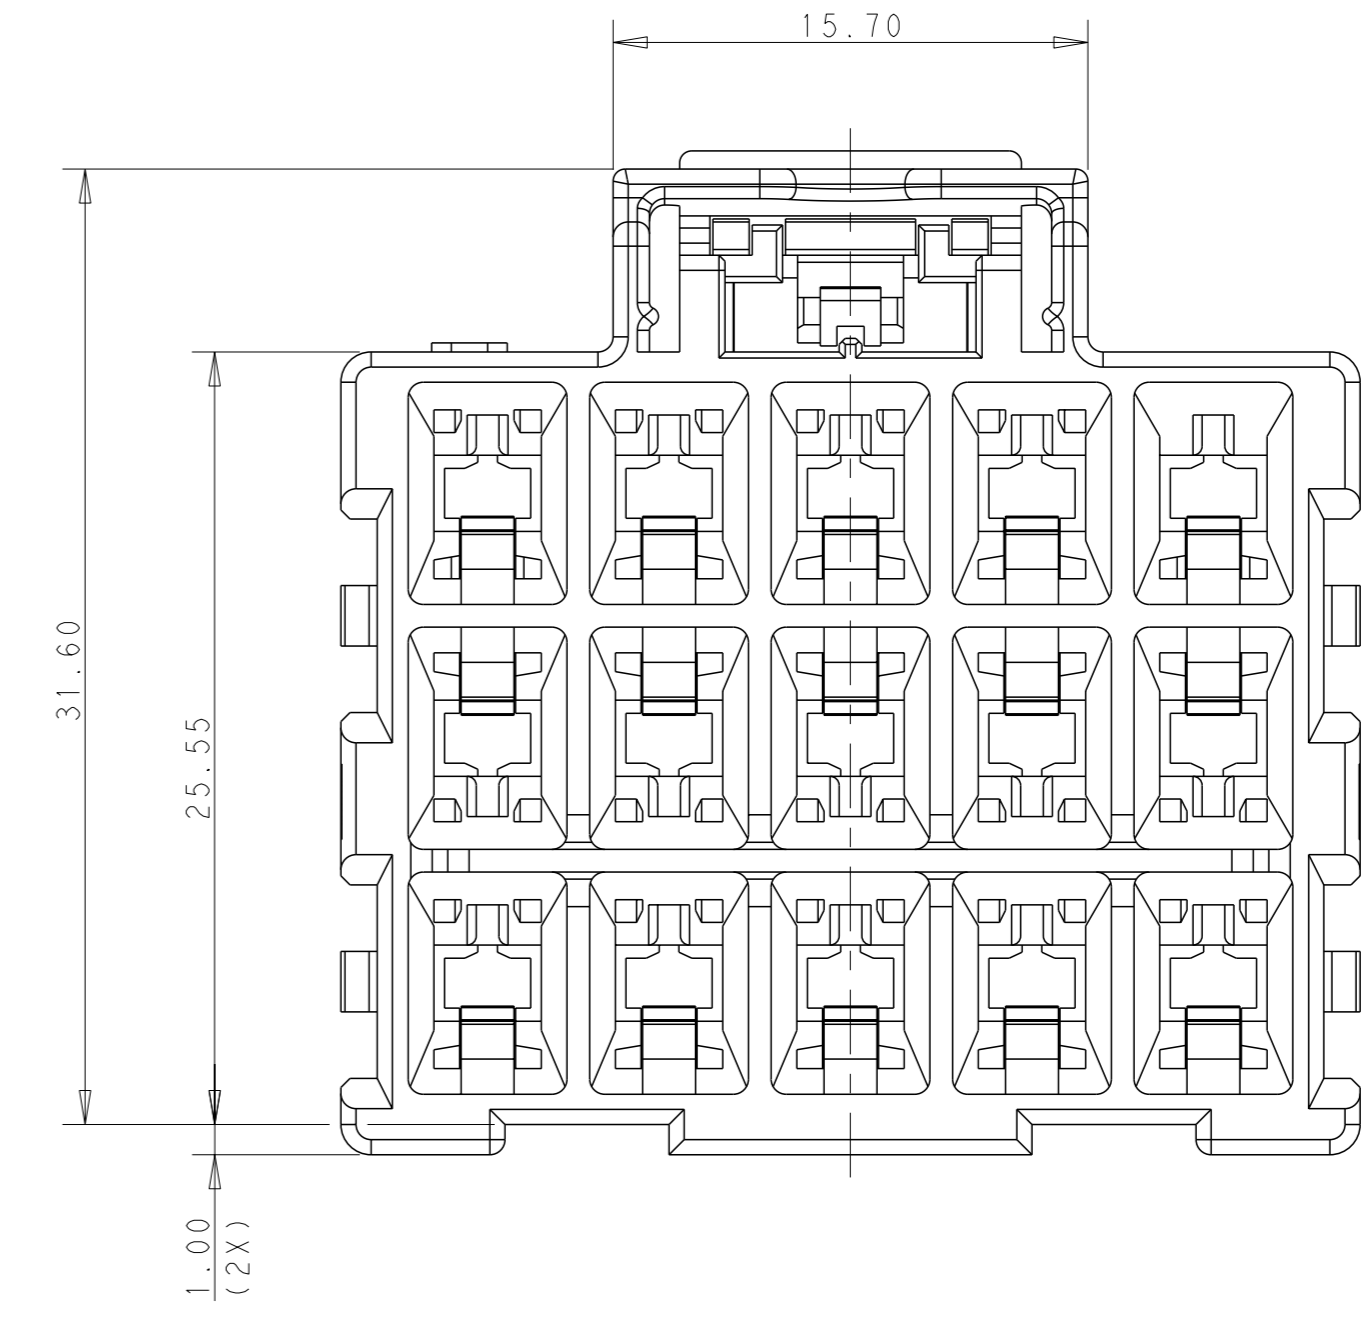


| REVISIONS | | | | |
|-----------|-----|---------------------------|---------|----------|
| # | LY# | DESCRIPTION | DATE | OWN APVD |
| | D | REVISED PER ECO-16-009784 | 20JUN16 | RS GJ |

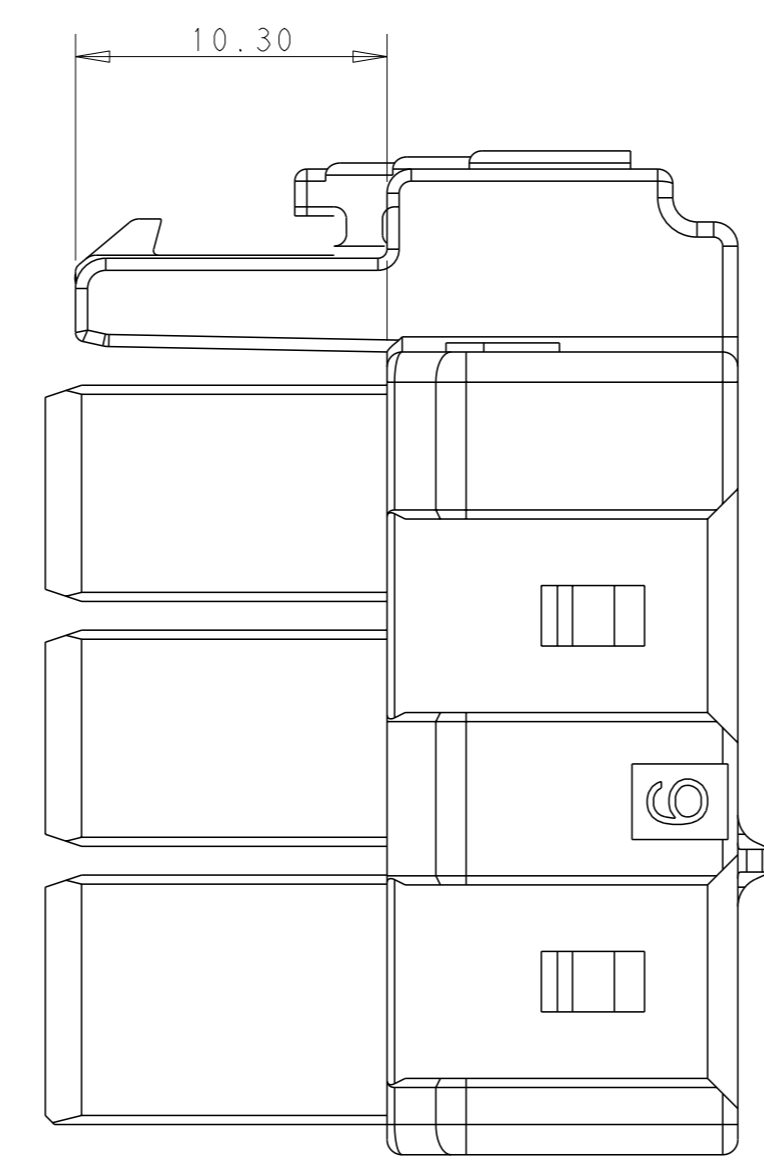

| POS. | DIM. A |
|------|--------|
| 3*5 | 33.70 |
| 3*4 | 27.70 |
| 3*3 | 21.70 |

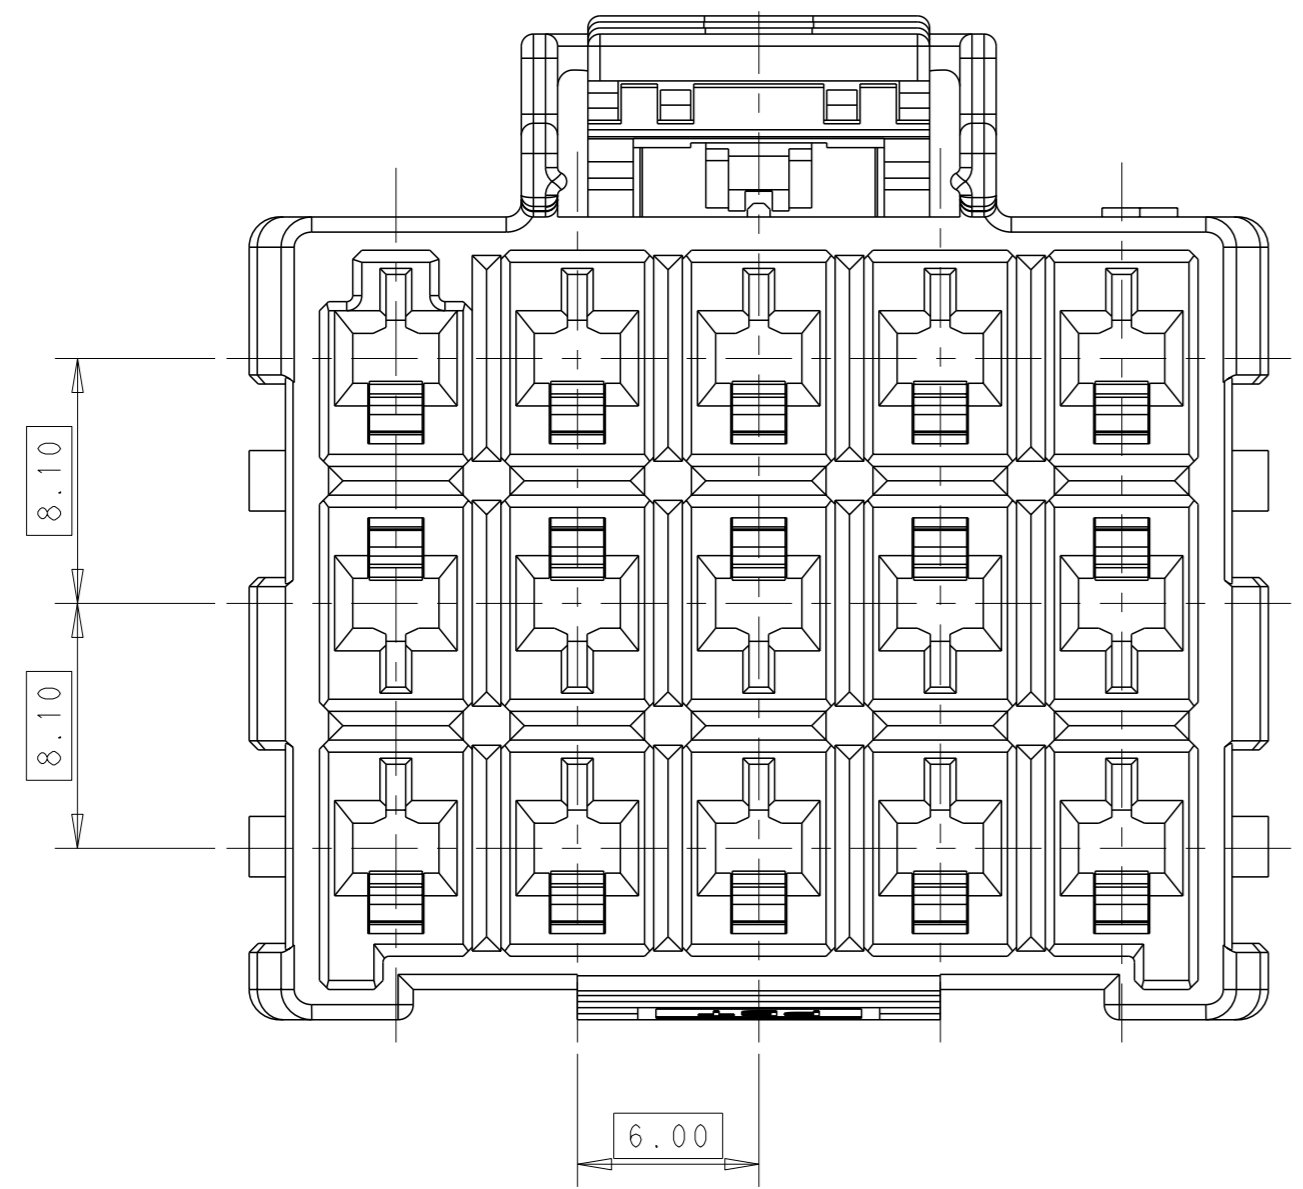







- ⚠ MATERIAL:
 LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
 KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

 LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
 KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- ⚠ MATERIAL MARK:
 LEVEL 1:PBT,LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
 RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4 MATING CONN. P/N
 CAP HSG:*-1971874/5-*,
 DOUBLE ROW LOCK PLATE:*-1971778-*,SINGLE ROW LOCK PLATE:*-1971777-*

5 This product has not completed validation testing.

| | | | |
|--|-------|----------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | OWN TOMMY WU 09JUL2012 | TE Connectivity NAME PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK |
| DIMENSIONS: | | CHK HAPYE WU 09JUL2012 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD YUZHONG MAO 09JUL2012 | |
| mm | | PRODUCT SPEC | |
| 0 PLC | ± | 108-106118 | SIZE |
| 1 PLC | ±0.35 | APPLICATION SPEC | CAGE CODE |
| 2 PLC | ±0.25 | 114-106118 | DRAWING NO |
| 3 PLC | ± | WEIGHT | RESTRICTED TO |
| 4 PLC | ± | Customer Drawing | A100779C=1971876 |
| ANGLES | ± | SCALE 3:1 | SHEET 1 OF 2 |
| FINISH | - | REV D | |

| REVISIONS | | | | |
|-----------|-----|-------------|------|------|
| P | LY# | DESCRIPTION | DATE | APPV |
| - | - | SEE SHEET 1 | - | - |

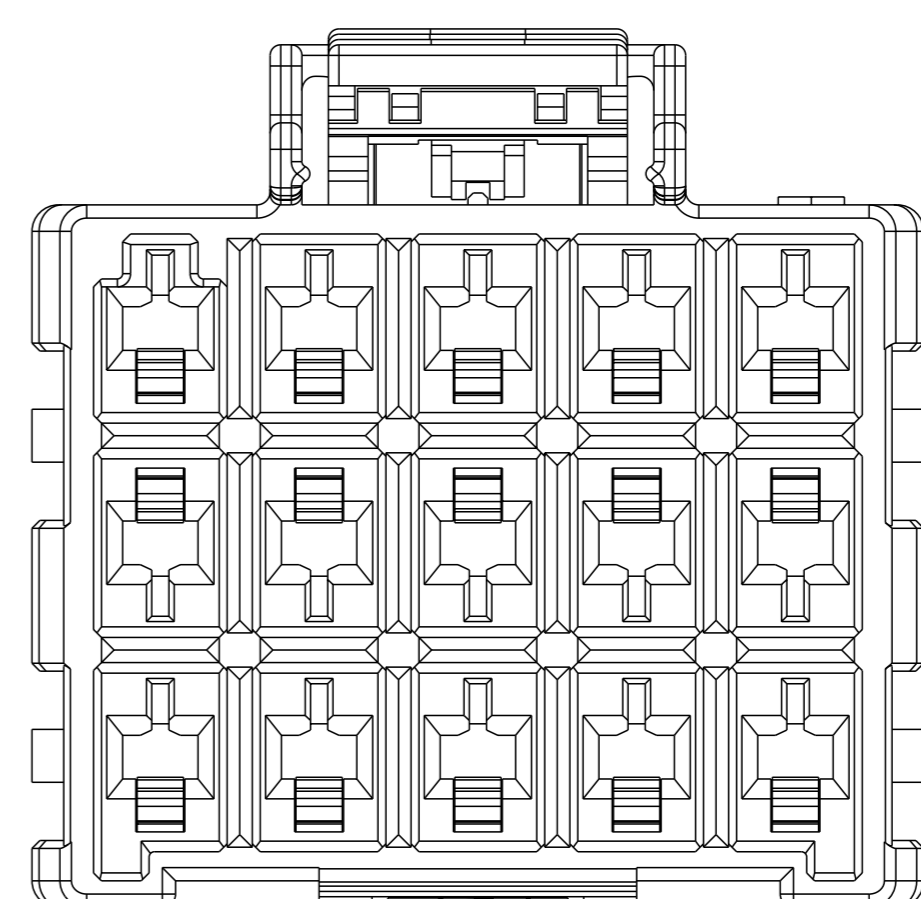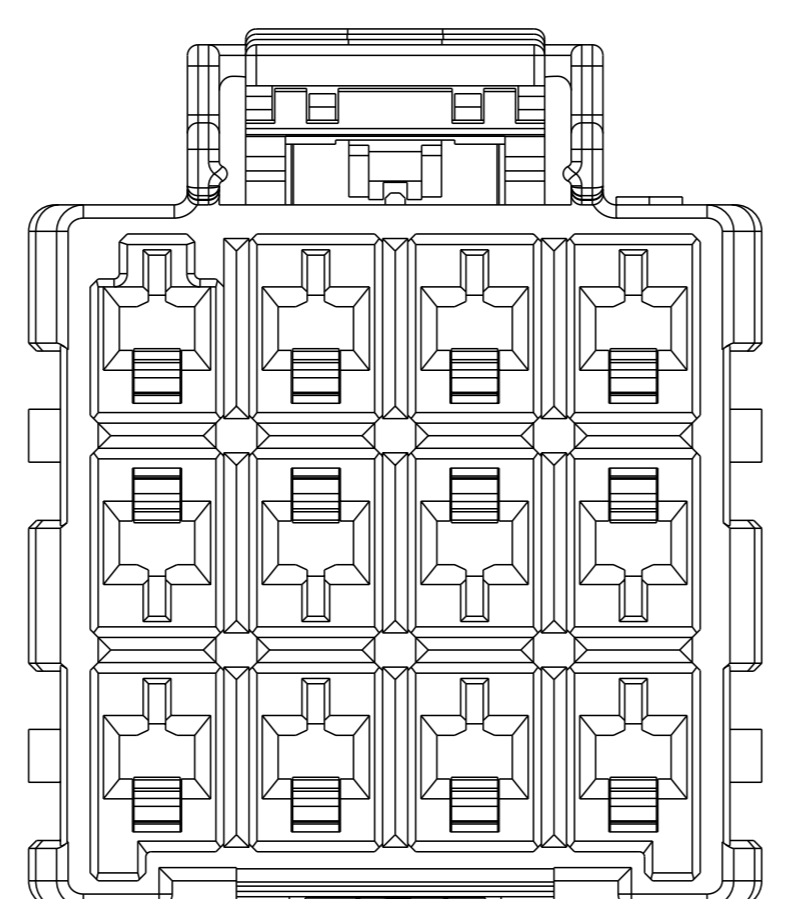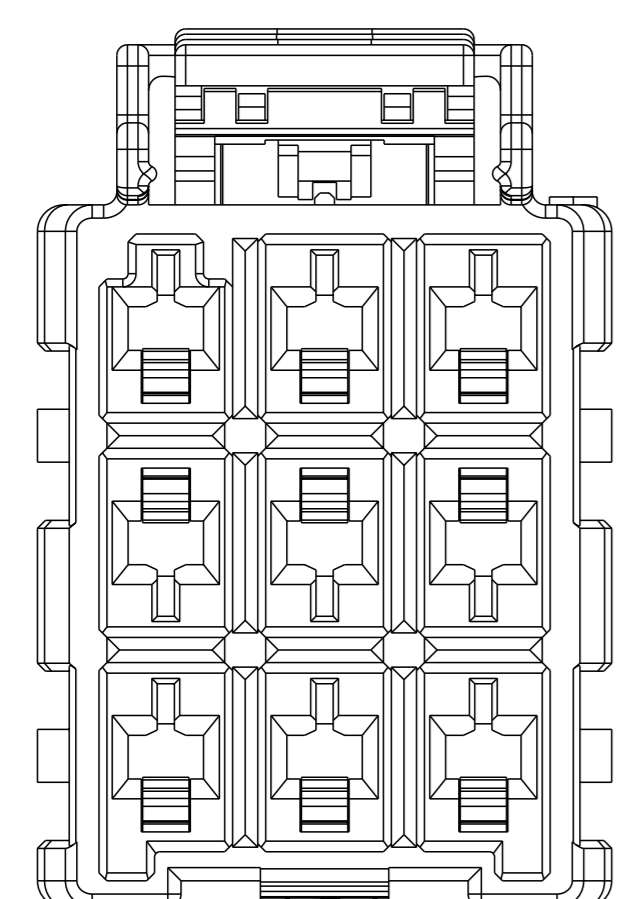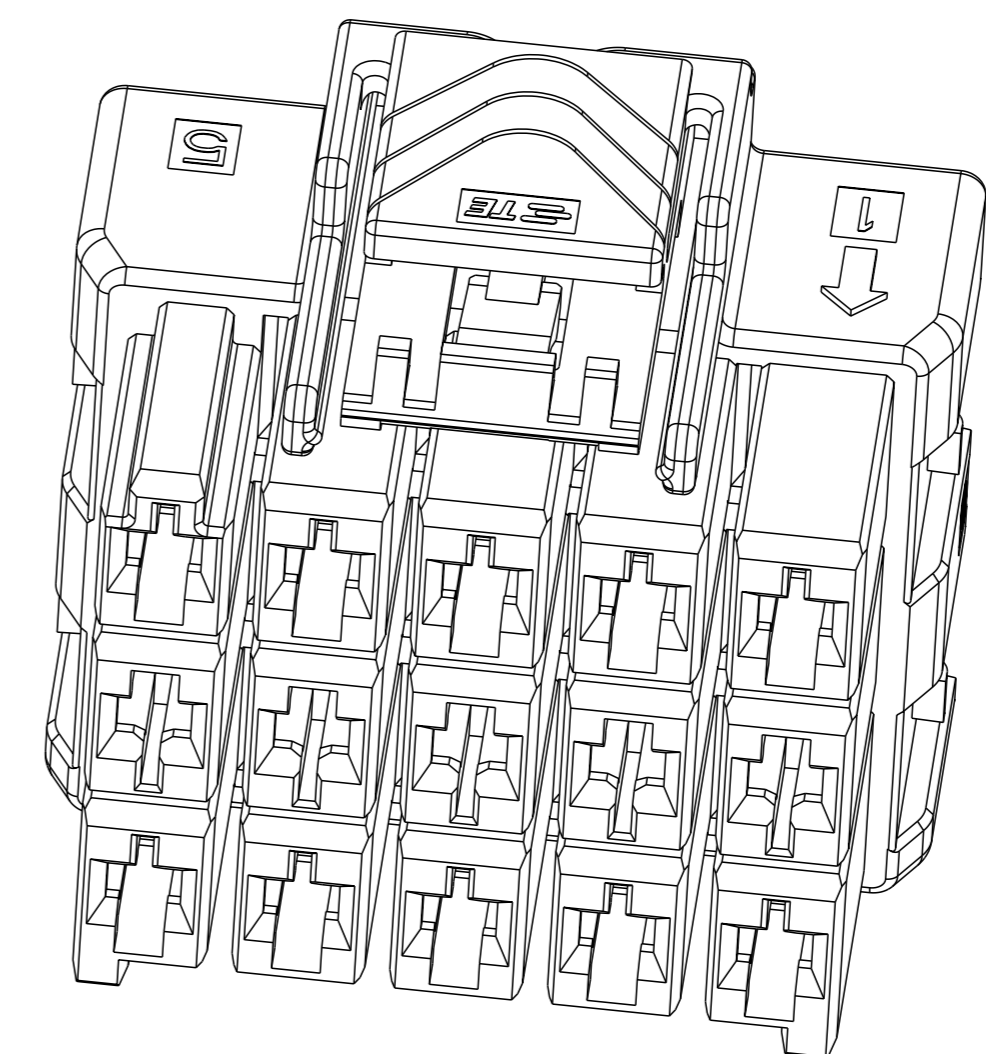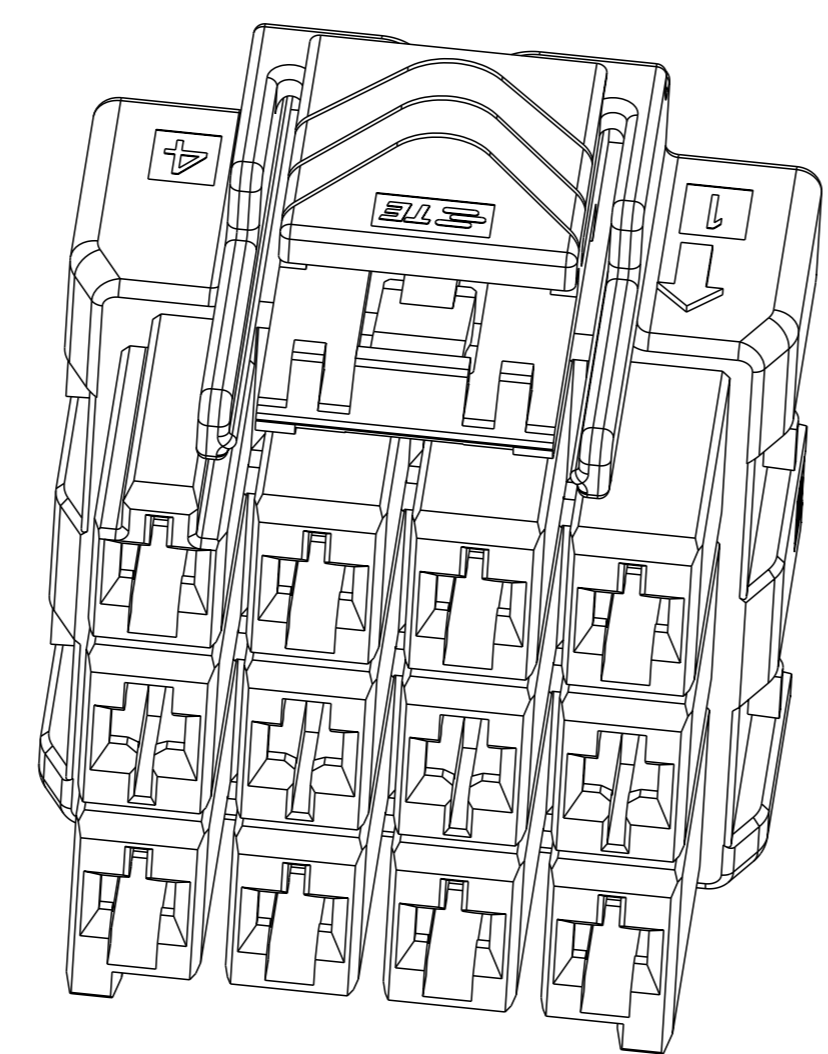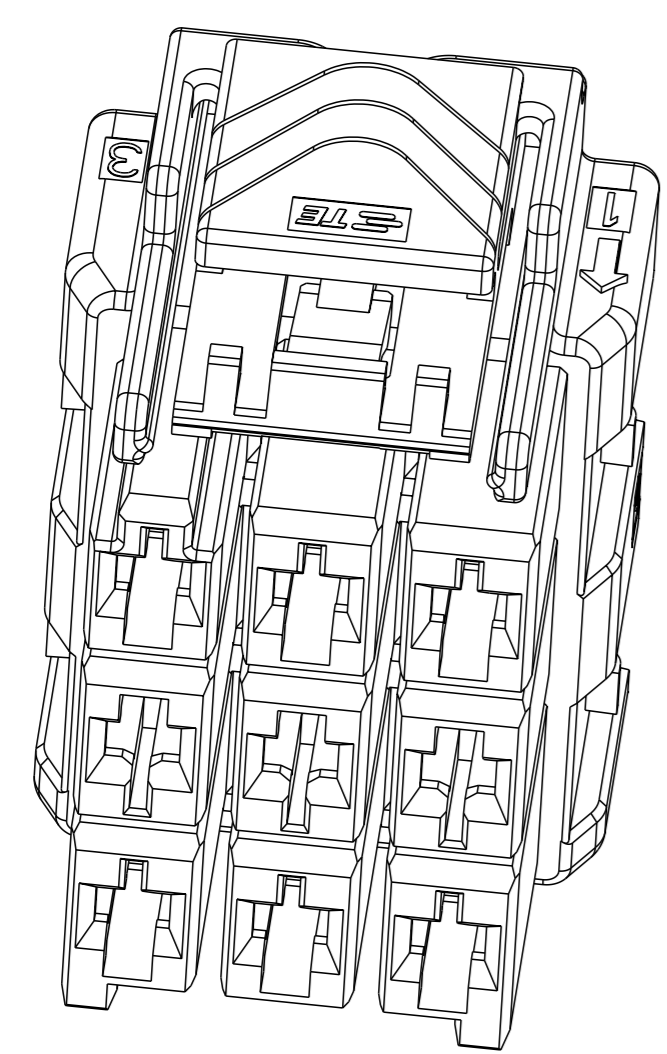


| | | | |
|------|----------|-------|-------------|
| 3*5 | LEVEL 1 | KEY A | 1-1971876-7 |
| | | KEY B | 2-1971876-7 |
| | | KEY C | 3-1971876-7 |
| | | KEY D | 4-1971876-7 |
| 3*5 | LEVEL 2 | KEY A | 5-1971876-7 |
| | | KEY B | 6-1971876-7 |
| | | KEY C | 7-1971876-7 |
| | | KEY D | 8-1971876-7 |
| 3*4 | LEVEL 1 | KEY A | 1-1971876-4 |
| | | KEY B | 2-1971876-4 |
| | | KEY C | 3-1971876-4 |
| | | KEY D | 4-1971876-4 |
| 3*4 | LEVEL 2 | KEY A | 5-1971876-4 |
| | | KEY B | 6-1971876-4 |
| | | KEY C | 7-1971876-4 |
| | | KEY D | 8-1971876-4 |
| 3*3 | LEVEL 1 | KEY A | 1-1971876-3 |
| | | KEY B | 2-1971876-3 |
| | | KEY C | 3-1971876-3 |
| | | KEY D | 4-1971876-3 |
| 3*3 | LEVEL 2 | KEY A | 5-1971876-3 |
| | | KEY B | 6-1971876-3 |
| | | KEY C | 7-1971876-3 |
| | | KEY D | 8-1971876-3 |
| POS. | MATERIAL | KEY | P/N |


3*3 POSITIONS

3*4 POSITIONS


3*5 POSITIONS

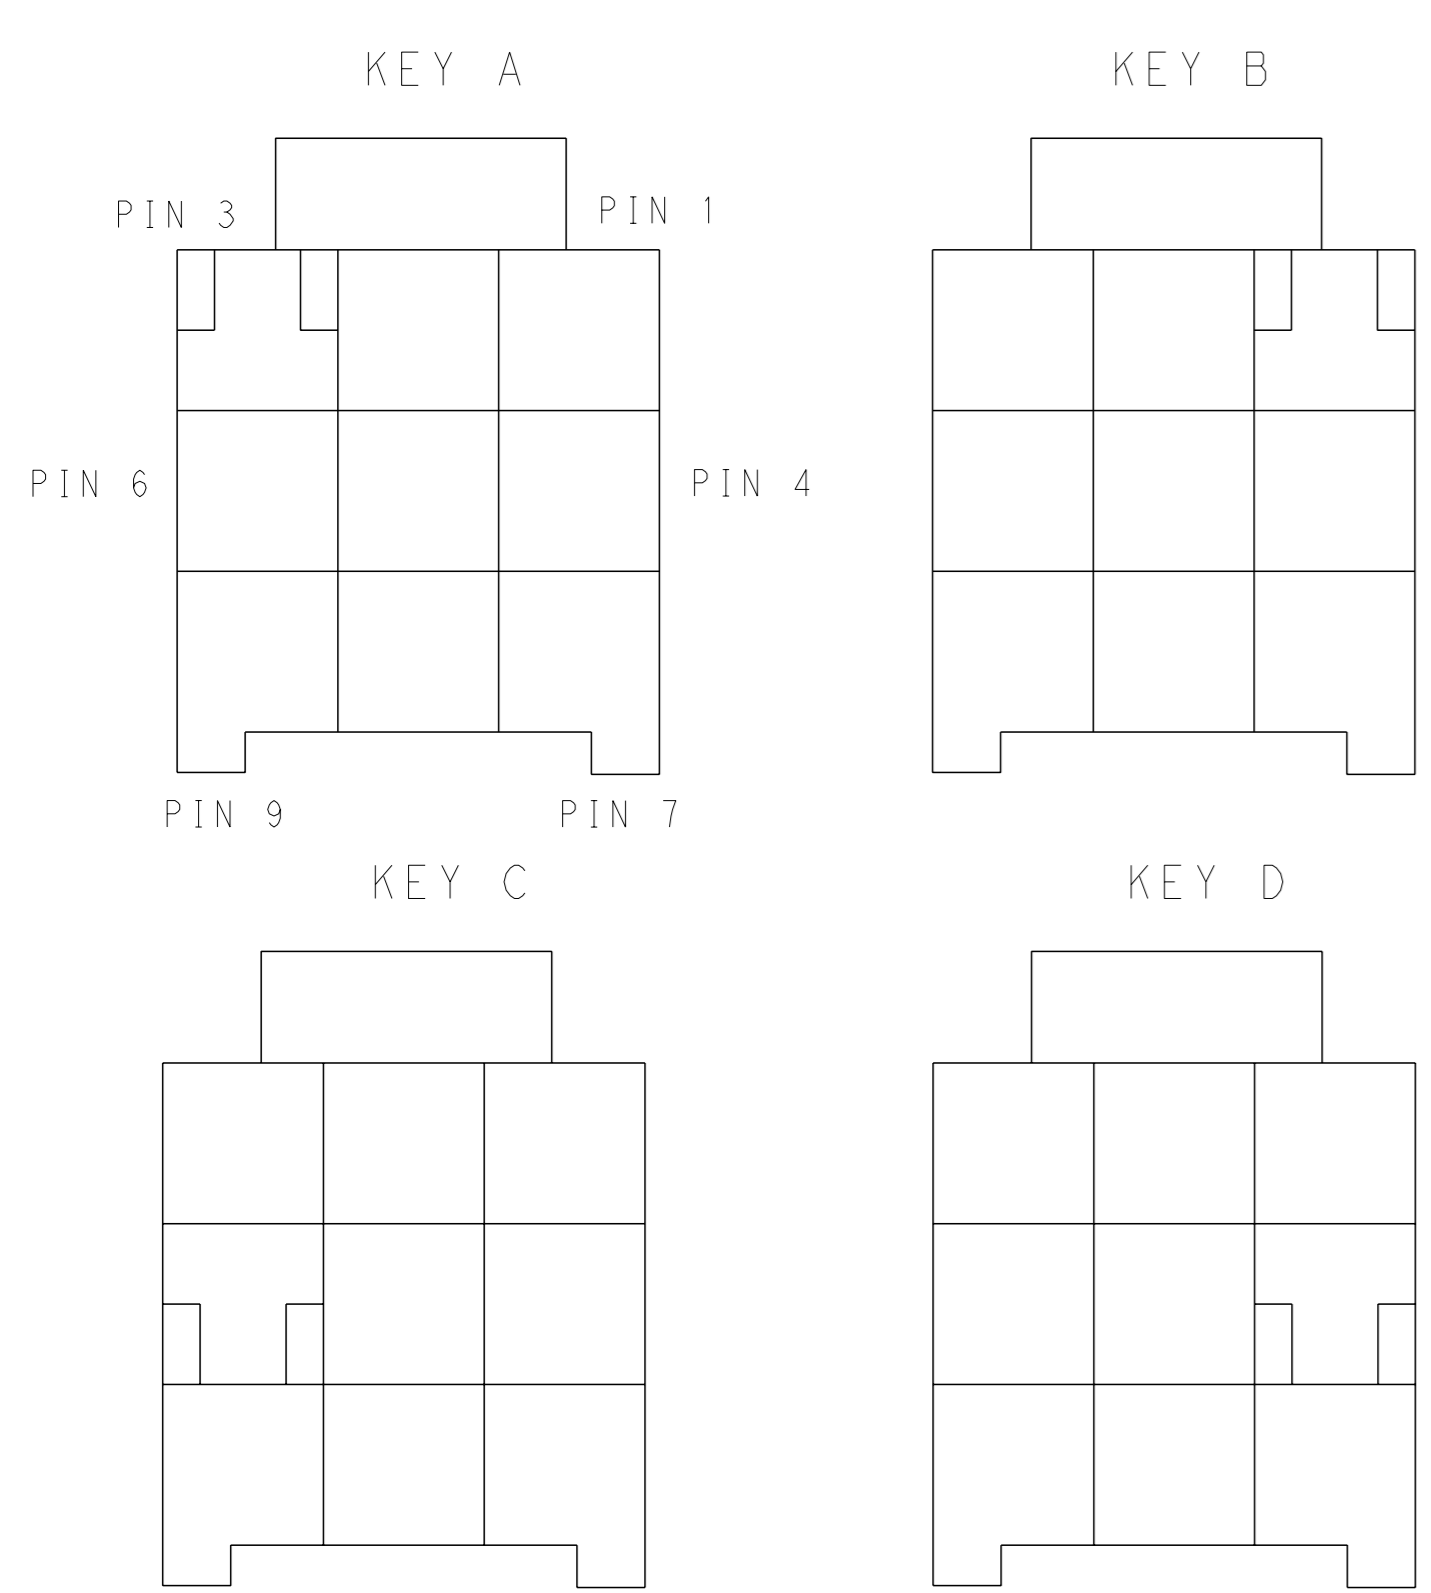

KEYING FOR 3*3 POS.

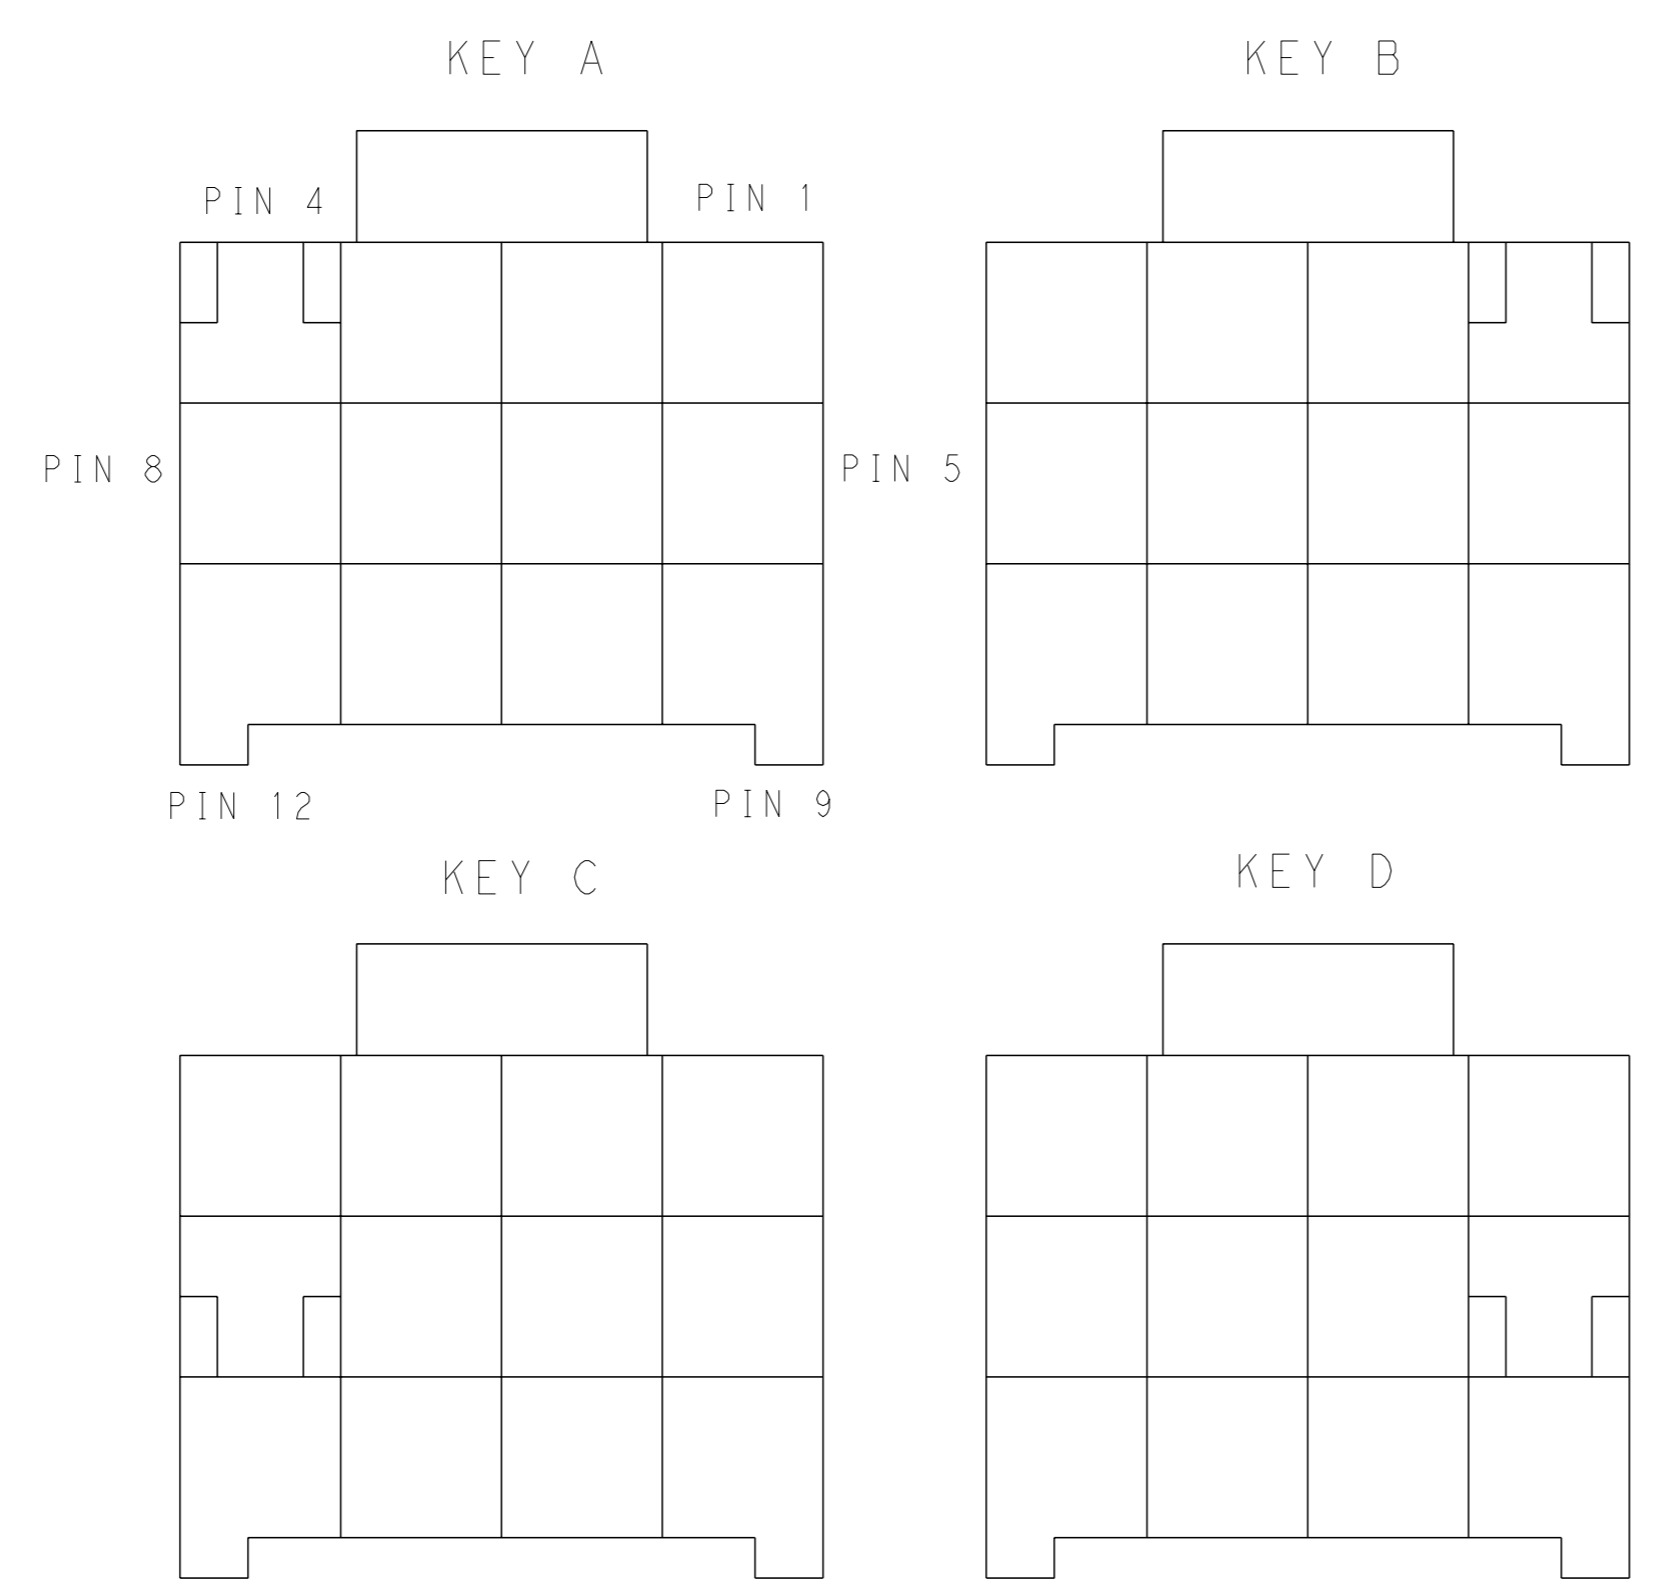

KEYING FOR 3*4 POS.

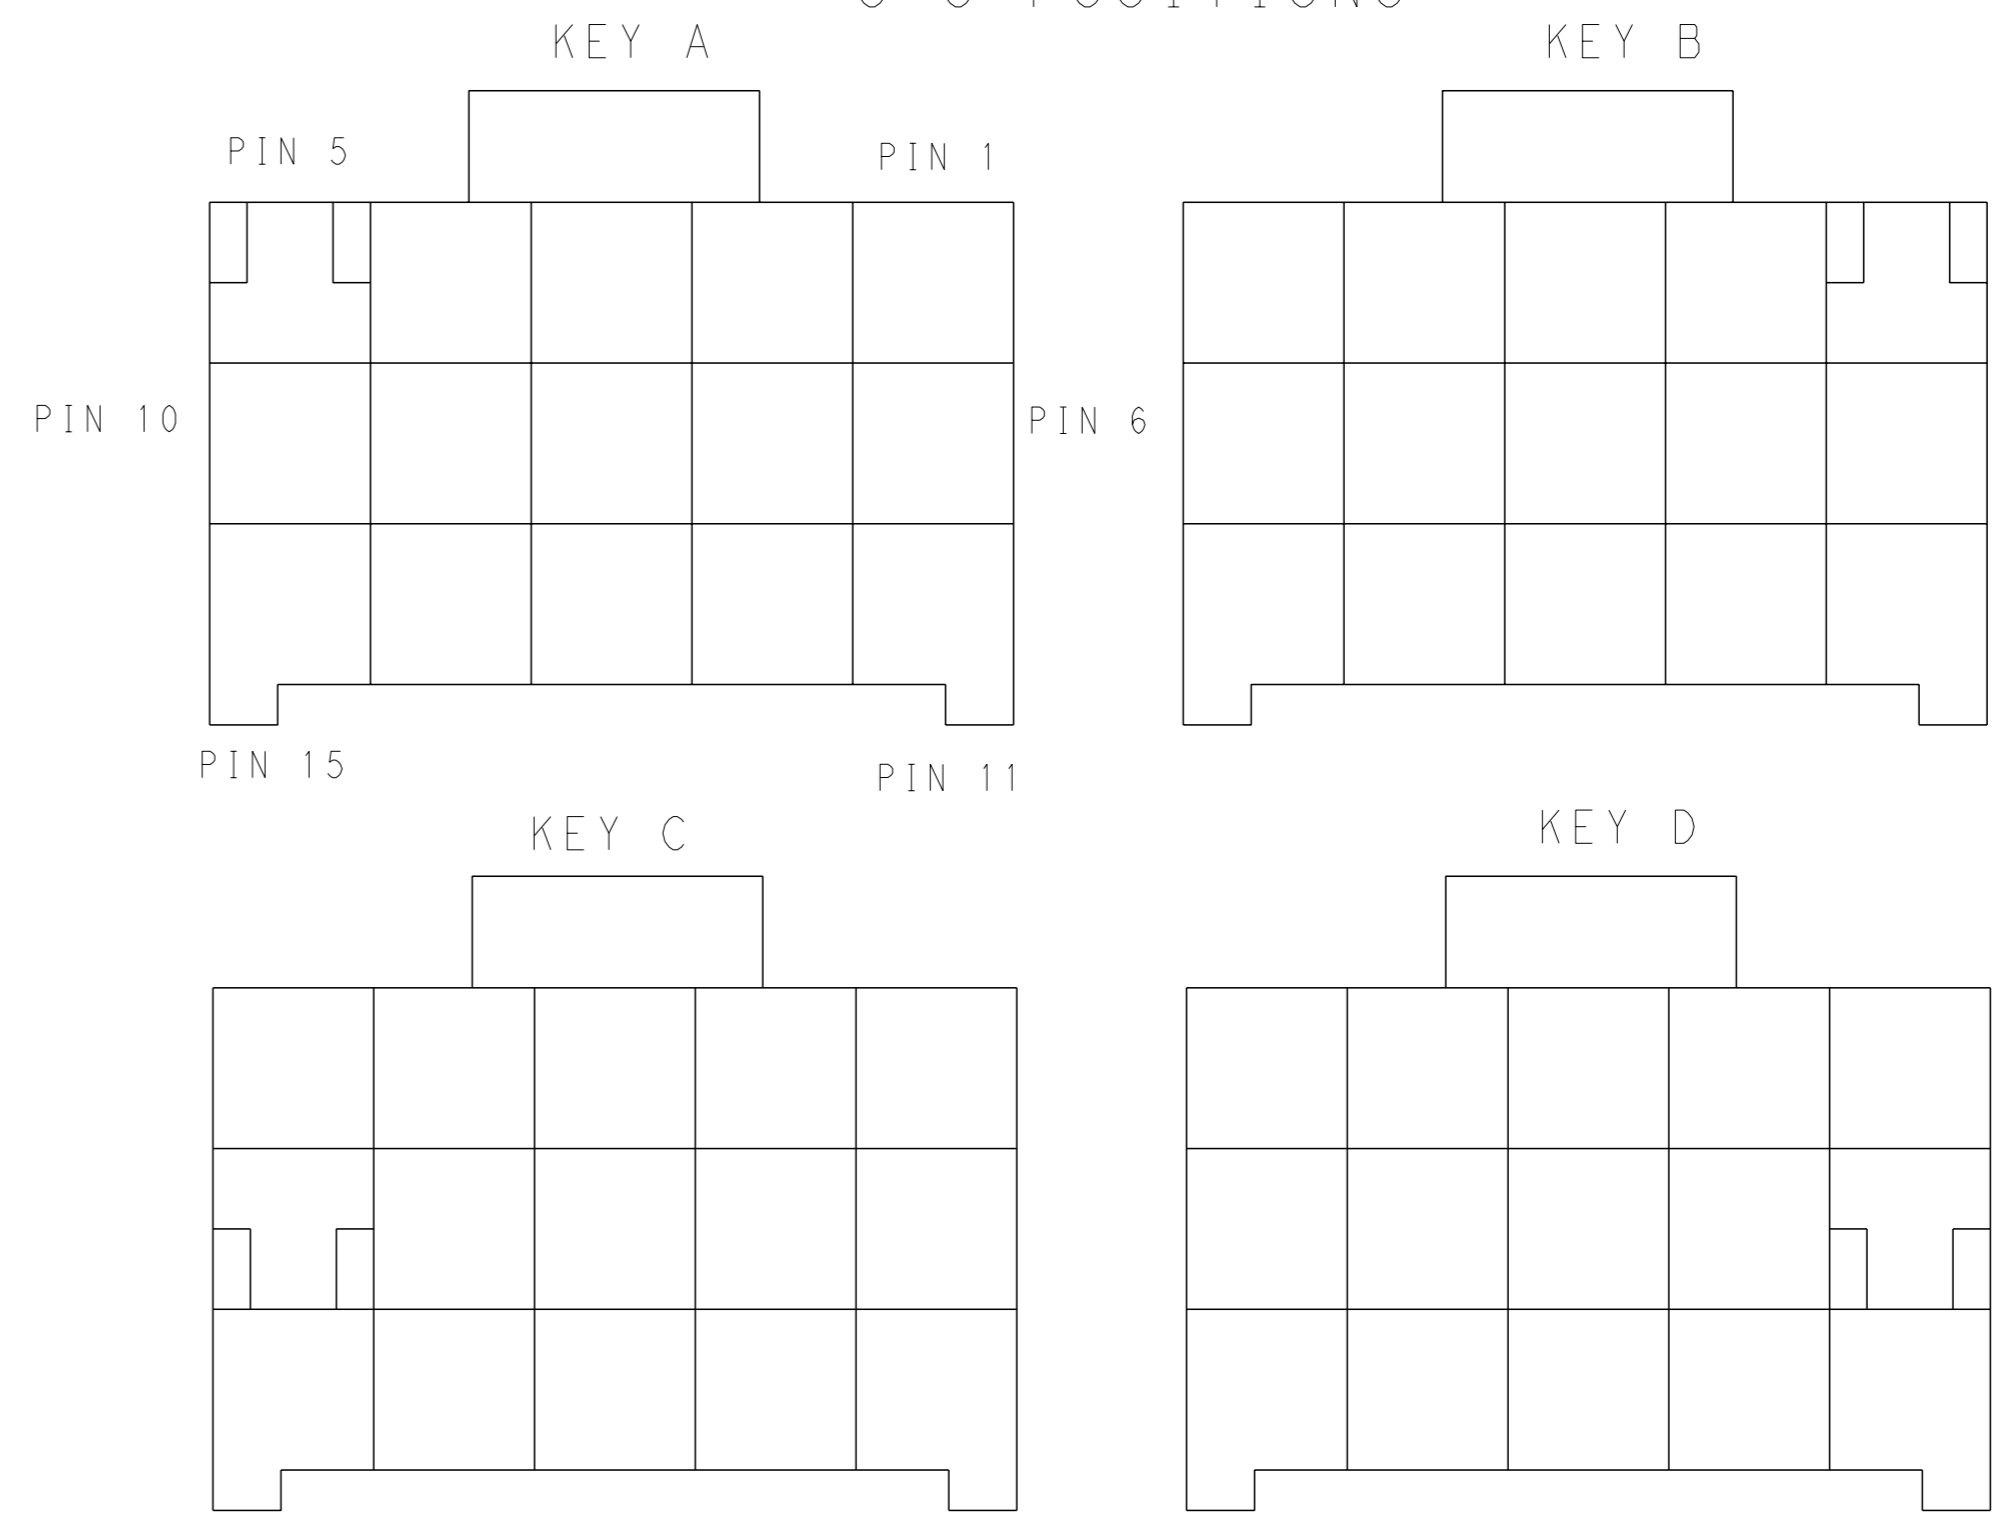

KEYING FOR 3*5 POS.

| | | | |
|--|--|---|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | OWN TOMMY WU 09JUL2012 | TE Connectivity PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK |
| DIMENSIONS: mm | | CHK HAPYE WU 09JUL2012 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APPV YUHONG MAO 09JUL2012 | |
| 0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES FINISH ± | | NAME PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118 WEIGHT | |
| MATERIAL | | Customer Drawing | SIZE CAGE CODE DRAWING NO. RESTRICTED TO A1 00779C=1971876 SCALE - SHEET 2 OF 2 REV D |