
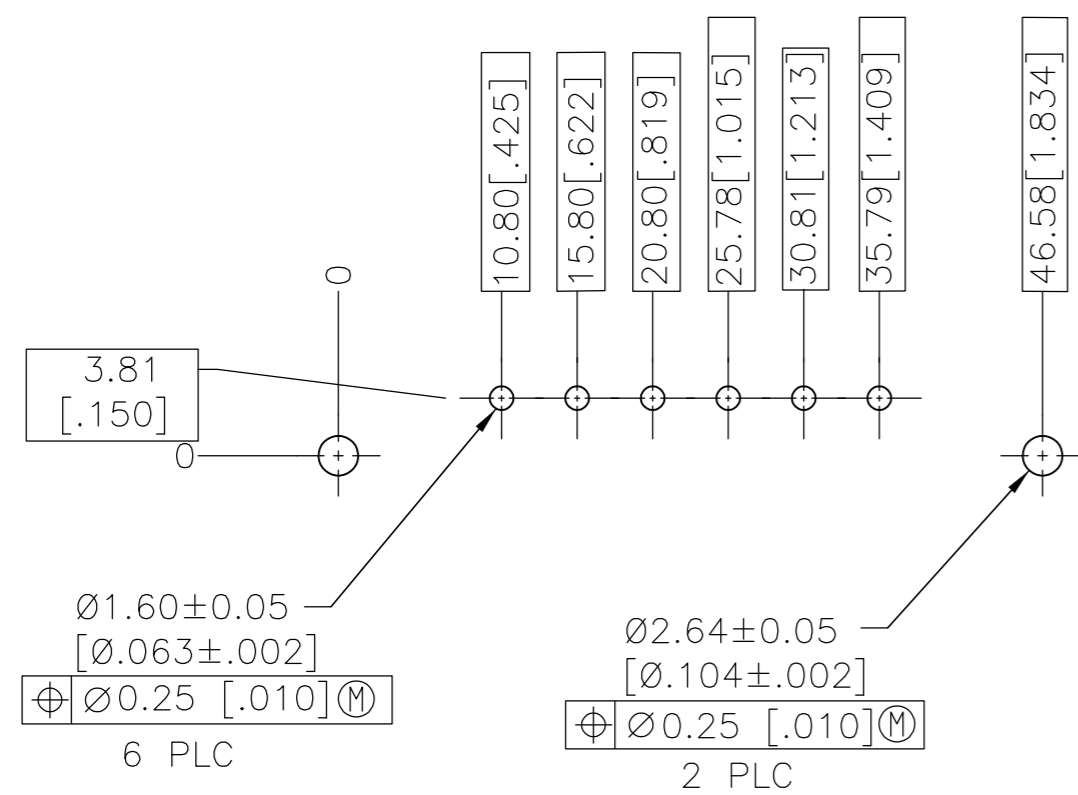
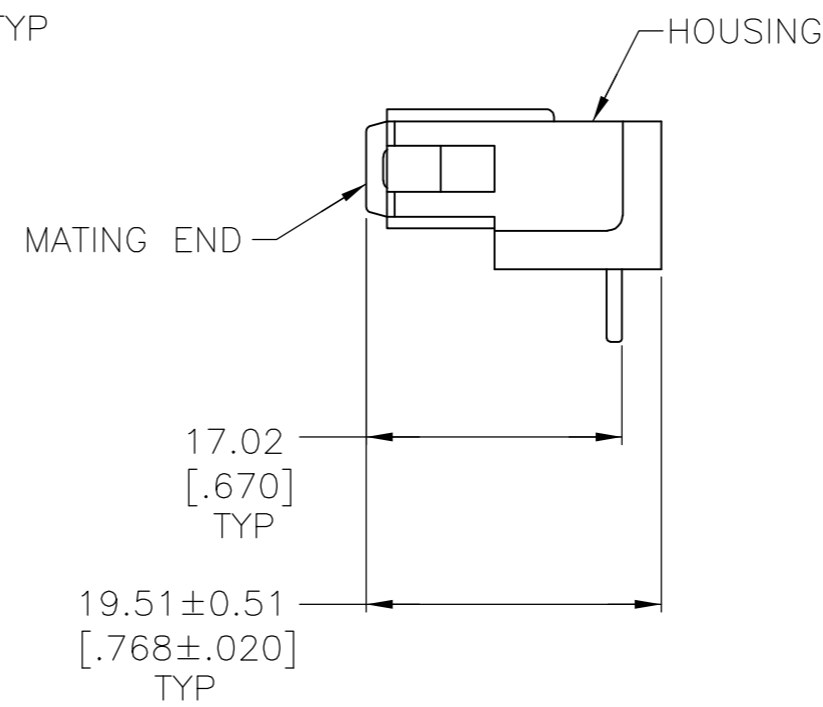
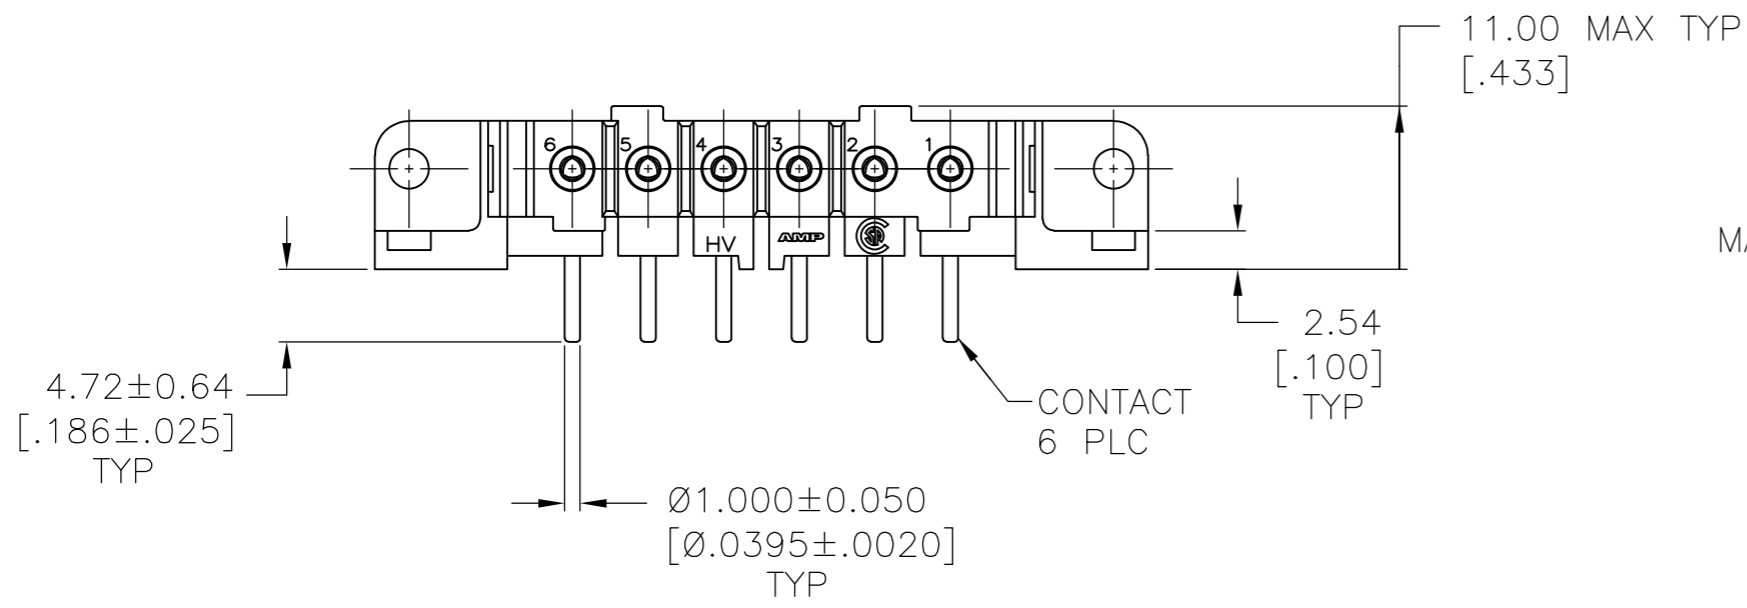


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
K		REVISED PER ECO-16-004940	06AUG2016	NK MZ

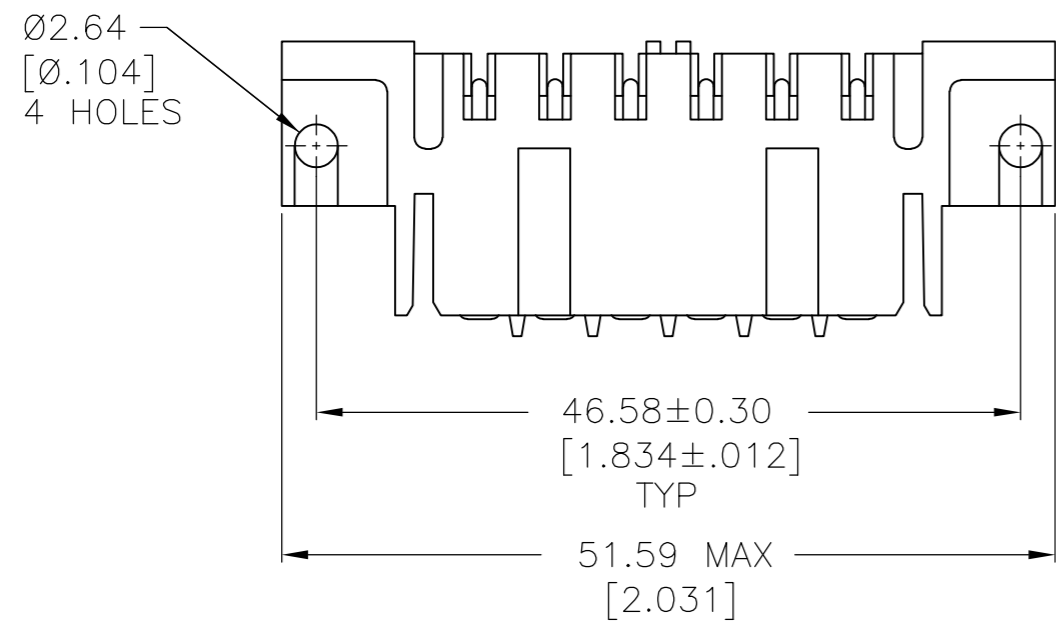

- 1 3.81um [0.000150] MIN TIN-LEAD OVER 0.76um [0.000030] MIN NICKEL.
- 2 0.76um [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] MIN FROM MATING END, 3.81um [0.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [0.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [0.000050] MIN NICKEL.
- 3 3.81um [0.000150] MIN TIN OVER 0.76um [0.000030] MIN NICKEL.
- 4 0.76um [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] MIN FROM MATING END, 3.81um [0.000150] MIN TIN FOR A LENGTH OF 5.23 [0.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [0.000050] MIN NICKEL.

CONTACT FINISH	PART NUMBER
4	207610-7
3	207610-6
2	207610-3
1	-207610-1

RECOMMENDED PC BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 08/06/92	<b>STE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK J.McCLINTON 8-11-92		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.TRAVIS 8-11-92	NAME	
0 PLC ± -		PRODUCT SPEC	108-10033	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± 0.25 [0.010]		WEIGHT	A2 00779 C=207610	
3 PLC ± -		FINISH	SCALE 2:1 SHEET 1 of 1 REV K	
4 PLC ± -		CONTACTS: SEE TBL	CUSTOMER DRAWING	
ANGLES ± -				
MATERIAL HSG: NYLON, RED				