



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV PER EC 0320-144-97	05MAY97	CO	AF
	C	REV PER ECR-18-000581	22JAN2018	RS	MZ


$\phi 20.07 \pm 0.25$
[$\phi .790 \pm .010$]

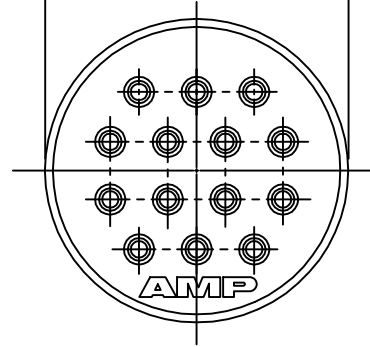


6.35 ± 0.25
[$.250 \pm .010$]

SEAL
MATERIAL: SILICON, RED IRON OXIDE
QTY=1

SEE TABLE
FOR CAVITY
IDENTIFICATION
DETAIL

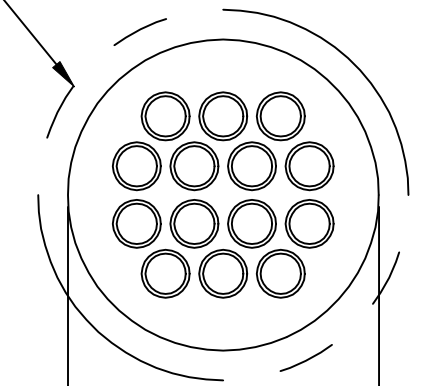


1.90
[.075]



$\phi 20.57 \pm 0.25$
[$\phi .810 \pm .010$]

PRESSURE PLATE
MATERIAL: NYLON, BLACK
QTY=1

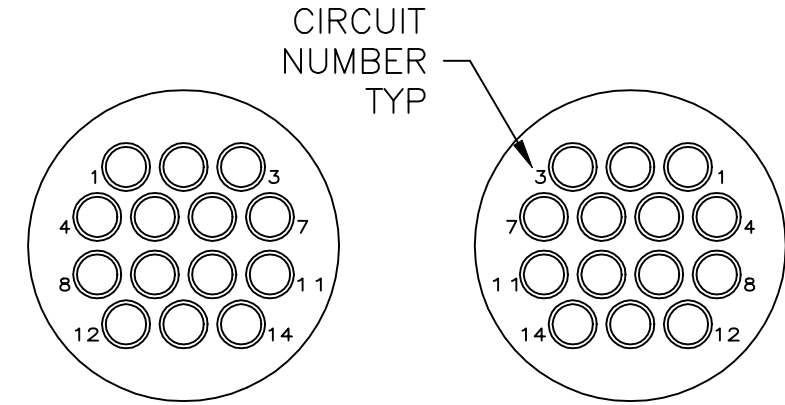

DETAIL A

DETAIL B

- 1 DETAIL "A" FOR USE WITH SOCKET CONTACTS.
- 2 DETAIL "B" FOR USE WITH PIN CONTACTS.
- 3 INSULATION RANGE: $\phi 1.90$ [$\phi .075$] TO $\phi 2.54$ [$\phi .100$]

PER DETAIL B	213919-2
PER DETAIL A	213919-1
CAVITY IDENT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W.G.LENKER 09 OCT 95	TE Connectivity Ltd.														
DIMENSIONS: mm [INCHES]		CHK R.STONE 11 OCT 95															
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.FRANTUM 11 OCT 95	NAME														
<table border="0"> <tr> <td>0 PLC</td> <td>± -</td> </tr> <tr> <td>1 PLC</td> <td>± -</td> </tr> <tr> <td>2 PLC</td> <td>± 0.13 [.005]</td> </tr> <tr> <td>3 PLC</td> <td>± -</td> </tr> <tr> <td>4 PLC</td> <td>± -</td> </tr> <tr> <td>ANGLES</td> <td>± -</td> </tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± 0.13 [.005]	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC 108-1579	WIRE ENTRY SEAL KIT, UNASSEMBLED, SIZE 17-14, CPC		
0 PLC	± -																
1 PLC	± -																
2 PLC	± 0.13 [.005]																
3 PLC	± -																
4 PLC	± -																
ANGLES	± -																
MATERIAL SEE CALLOUTS		FINISH -	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779												
		WEIGHT -	RESTRICTED TO -	DRAWING NO C=213919	SCALE 2:1												
CUSTOMER DRAWING			SHEET 1 OF 1	REV C													