


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD	LOC	DIST	REVISIONS				DATE	APPD
4092	DF	50	P	F	ZONE	LTR	DESCRIPTION	
				✓		0	RELEASED PER 0600-2907-94 CT	10-94 DW

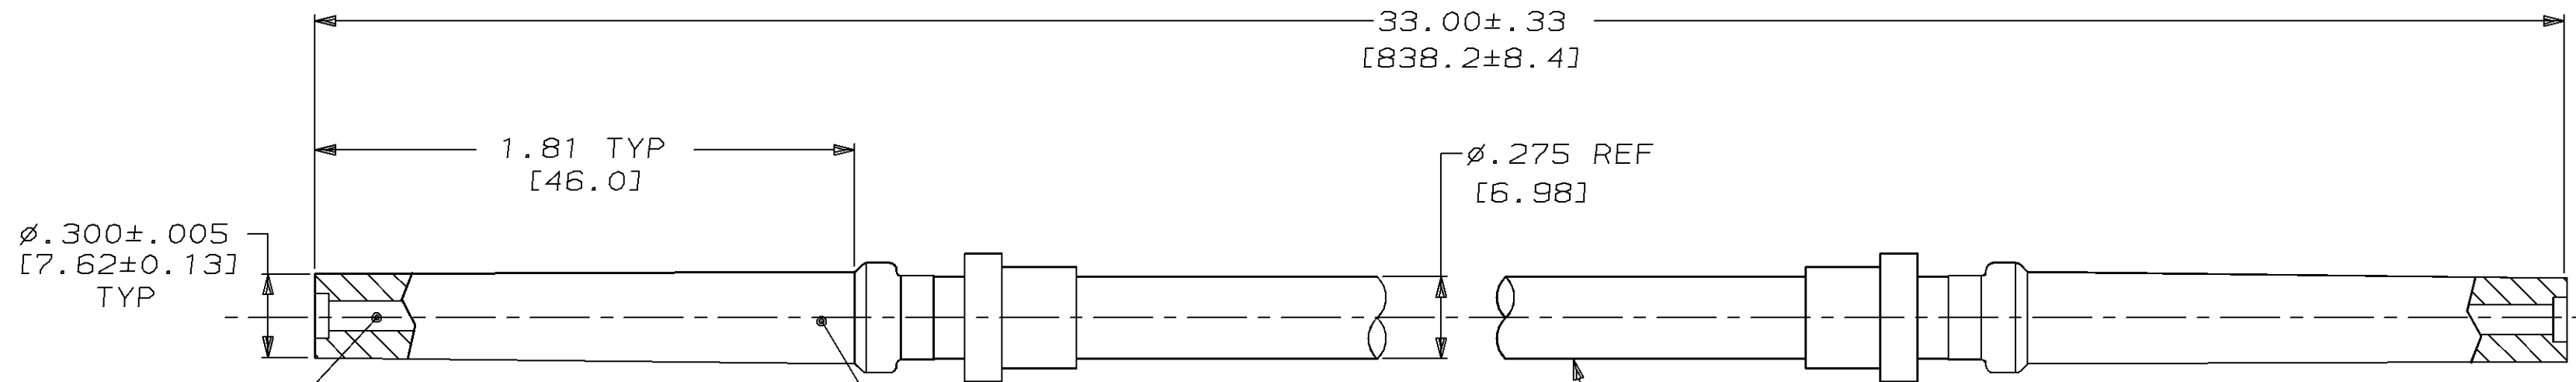

SOCKET; SIZE #16 (QTY=2)
 MAT'L: LEADED COPPER PER ASTM-B-301
 FINISH: GOLD PER MIL-G-45204
 OVER NICKEL PER QQ-N-290

MOLDED END TYP
 SILICONE RUBBER

FERRULE (QTY=2)
 MAT'L: POLYESTER
 MLDG. CMPD.
 COLOR: BLACK

#16 AWG SILICONE
 INSULATED LEAD WIRE
 COLOR: WHITE

1. MARKED PER MIL-STD-130.
2. TO MATE WITH AMP LGH-3 RECEPTACLE WITH 1.81 [46.0] BARREL DEPTH.

443068-1
 PART NO.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± -	DR 10-4-94 C.C. THOMAS	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 10-5-94 D. WEYANDT	
MATERIAL SEE CALLOUTS	APPD 10-5-94 D. WEYANDT	NAME LEAD ASSY, POS STOP, DBL END LGH-3 (NO CAP)
	APPD 10-5-94 C. THOMAS	
FINISH SEE CALLOUTS	PRODUCT SPEC -	SIZE C 00779
	APPLICATION SPEC -	DRAWING NO 443068
WEIGHT -		SCALE 2:1
		SHEET 1 OF 1