

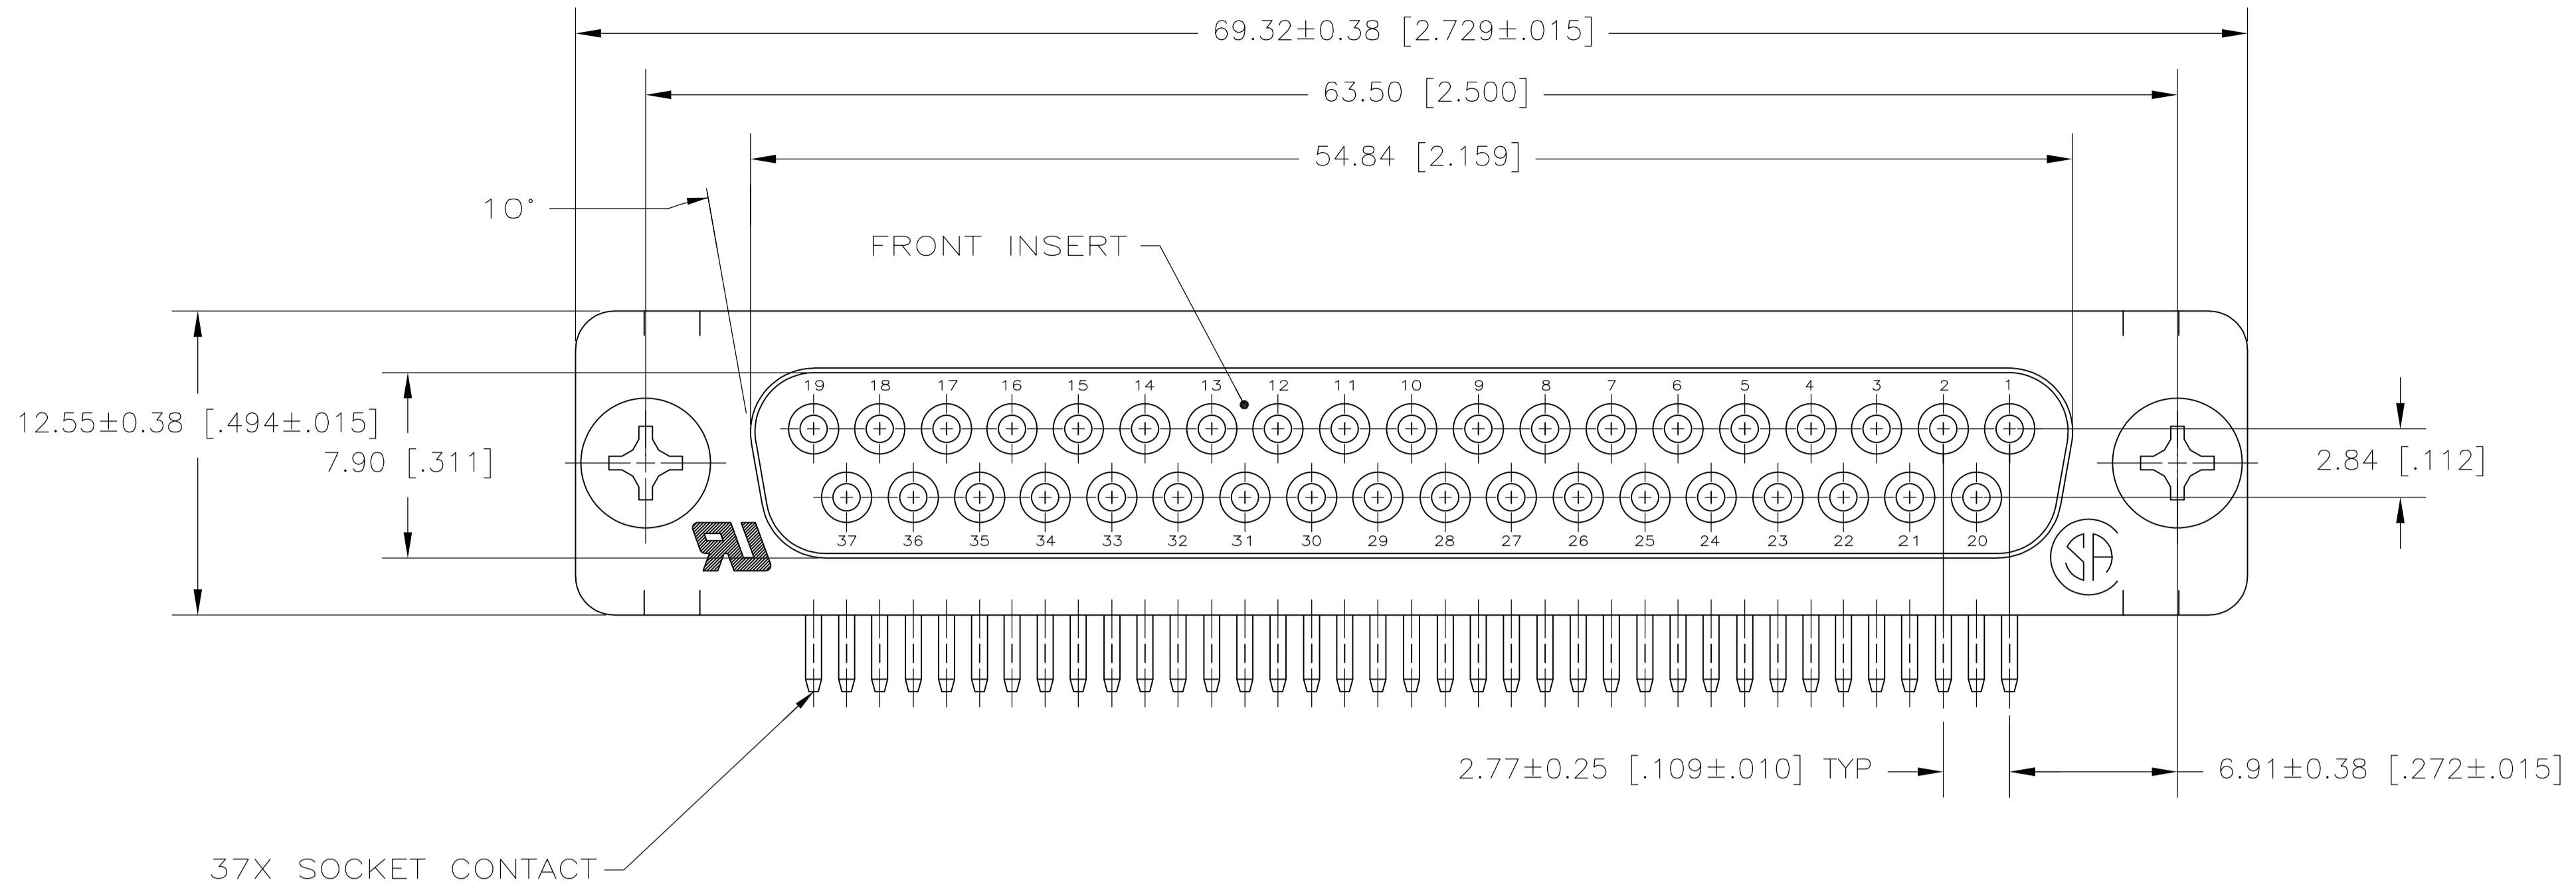


LOC		DIST		REVISIONS			
GP	00	REV	DATE	BY	APP	REV	DATE
B		REVISED PER ECO-14-011808	11AUG2014	AP	SB		

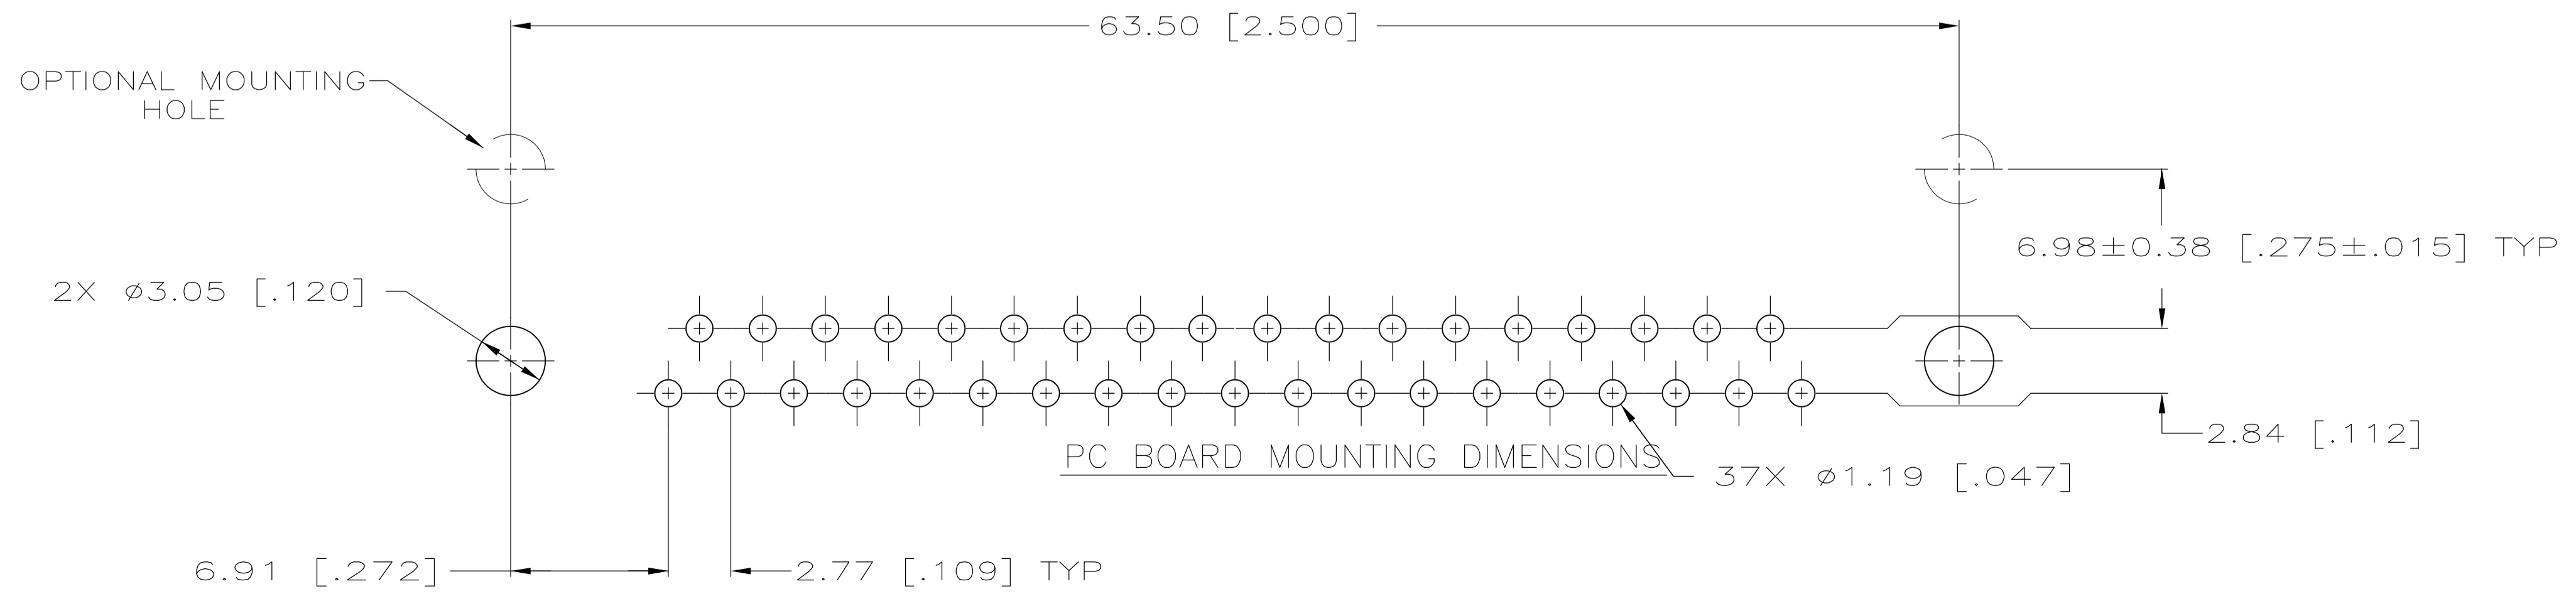

⚠ MOLDDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK.
 SHELLS & BRACKETS: CARBON STEEL.
 CONTACTS: PHOS BRONZE.

⚠ SHELLS & BRACKETS: ZINC PLATED YELLOW CHROMATE COATING.
 CONTACTS: GOLD FLASH FOR A LENGTH OF 2.54[.100] FROM MATING END, 2.54 m [.000100] MIN. TIN ON SOLDER END, 1.27µm [.000050] MIN. NICKEL ALL OVER.

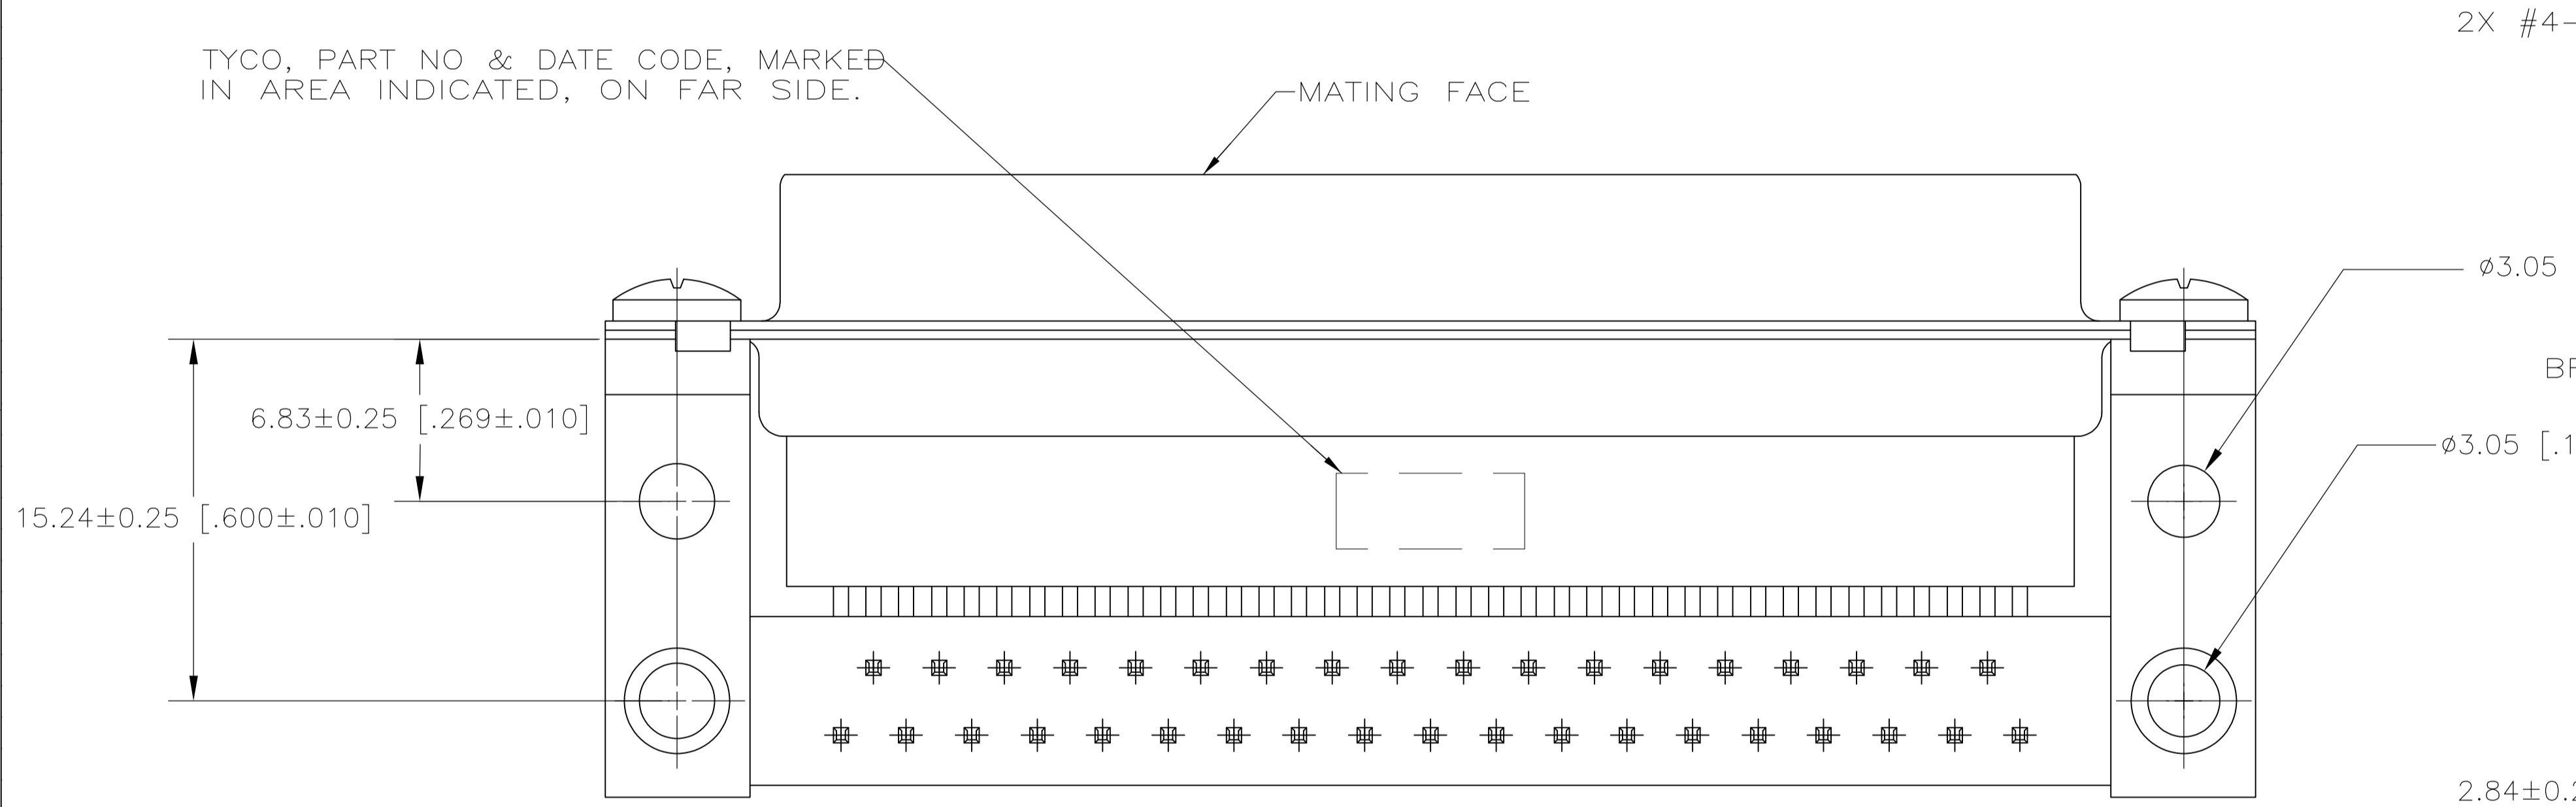

5205860-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWG: G. PETERS 14OCT05	STE TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK: S. BOLASH 14OCT05	NAME: RECEPTACLE ASSY, SIZE 4, 37 POS. RIGHT ANGLE, .545 SERIES, AMPLIMITE HDP	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D: M. WALMSLEY 14OCT05	PRODUCT SPEC: 108-40025	
0. PLC ± -		APPLICATION SPEC: 114-40013		
1. PLC ± -		SIZE: A1		
2. PLC ± -.13[.005]		CAGE CODE: 00779		
3. PLC ± -		DRAWING NO: 5205860		
4. PLC ± -		RESTRICTED TO: -		
ANGLES ± -		WEIGHT: -		
MATERIAL: 1	FINISH: 2	CUSTOMER DRAWING		
		SCALE: 4:1 SHEET: 1 OF 1 REV: B		