
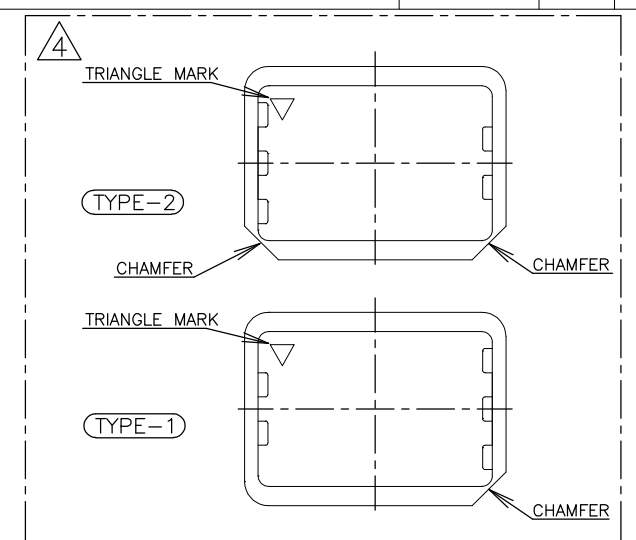
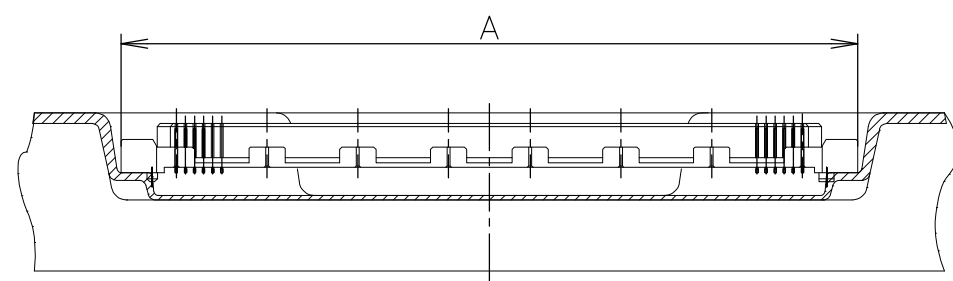




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY, 1995.
 © COPYRIGHT 1995 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED ECR-14-013112	30JAN2015	I.T	W.H
			C	REVISED PER ECO-17-002393	27MAY17	B.J	S.Y

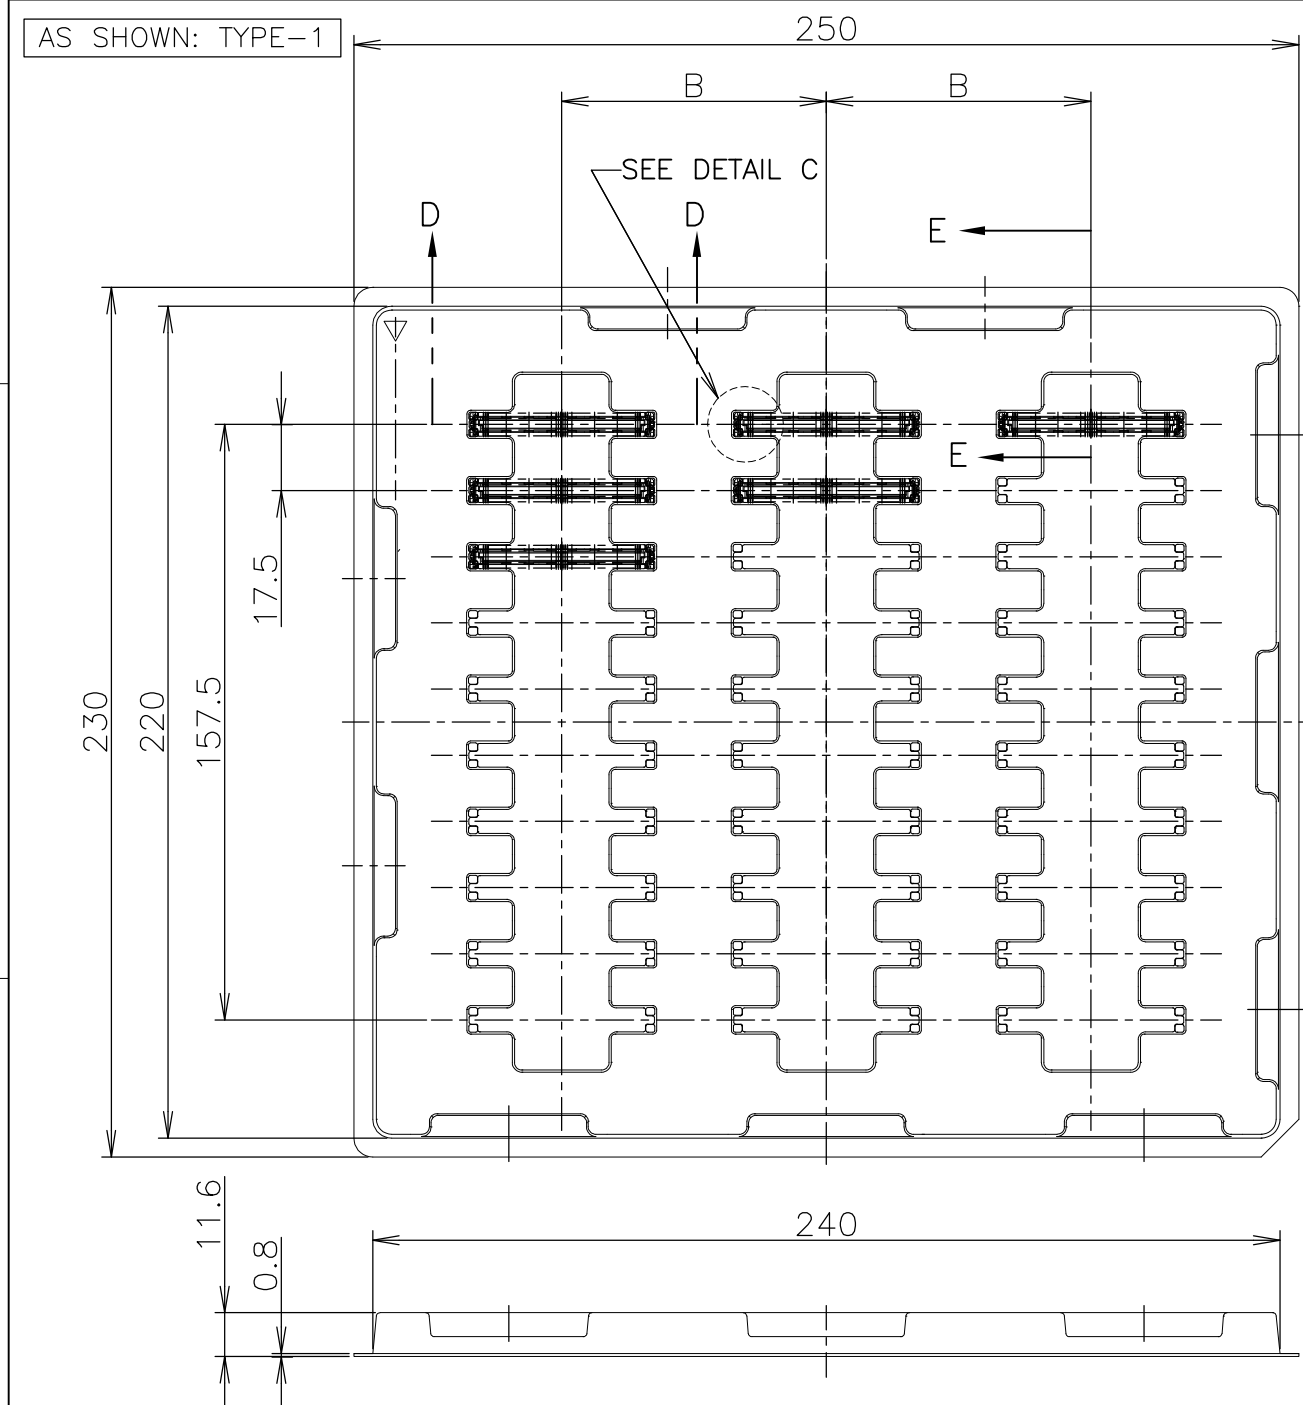

SEALANT	TOOLING STATUS	ROW	QTY	B	A	POS.	TRAY P/N	PART NO.
AVAILABLE	↑	3	30	70	54.7	160	912063-9	6-5316077-1
AVAILABLE	↑	↑	↑	↑	48.7	140	912063-8	6-↑-0
NOT AVAILABLE	↓	↓	↓	↓	42.7	120	4-912065-9	5-↓-9
NOT AVAILABLE	↓	↓	↓	↓	36.7	100	8-912066-2	5-↓-8
NOT AVAILABLE	↓	3	30	70	33.7	90	9-912066-6	5-↓-7
NOT AVAILABLE	↓	5	50	43	30.7	80	912067-3	5-↓-6
AVAILABLE	↑	↑	↑	↑	27.7	70	912063-1	5-↓-5
NOT AVAILABLE	↓	↓	↓	↓	24.7	60	9-912066-5	5-↓-4
AVAILABLE	↑	↑	↑	↑	21.7	50	9-912062-9	5-↓-3
NOT AVAILABLE	↓	↓	↓	↓	18.7	40	9-912066-4	5-↓-2
NOT AVAILABLE	↓	5	50	43	15.7	30	9-912066-3	5-5316077-1
AVAILABLE	↑	3	30	70	54.7	160	912063-9	1-5316077-1
AVAILABLE	↑	↑	↑	↑	48.7	140	912063-8	1-↑-0
NOT AVAILABLE	↓	↓	↓	↓	42.7	120	4-912065-9	↓-9
NOT AVAILABLE	↓	↓	↓	↓	36.7	100	8-912066-2	↓-8
NOT AVAILABLE	↓	3	30	70	33.7	90	9-912066-6	↓-7
NOT AVAILABLE	↓	5	50	43	30.7	80	912067-3	↓-6
AVAILABLE	↑	↑	↑	↑	27.7	70	912063-1	↓-5
NOT AVAILABLE	↓	↓	↓	↓	24.7	60	9-912066-5	↓-4
AVAILABLE	↑	↑	↑	↑	21.7	50	9-912062-9	↓-3
NOT AVAILABLE	↓	↓	↓	↓	18.7	40	9-912066-4	↓-2
NOT AVAILABLE	↓	5	50	43	15.7	30	9-912066-3	5316077-1

⚠ TRAY TYPE-1 AND TYPE-2 MUST BE PILED UP BY TURNS. (REFER TO PACKING SPECIFICATIONS)

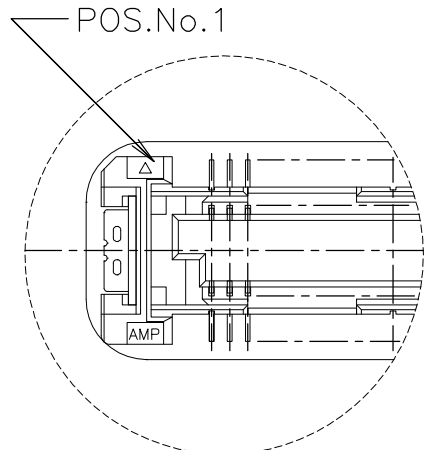

DETAIL C (SCALE 4:1)

GENERAL TOLERANCE 一般公差

10 ≥	±0.2
30 ≥	>10: ±0.25
100 ≥	>30: ±0.3
ANGLES: ±3°	











THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 单位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN HAWKING HE 21DEC04	TE Connectivity TRAY ASSY FH 0.6BTB CONNECTOR REC 4H W/G-CONT
	0 PLC ±-	CHK STEVEN YAO 21DEC04	
	1 PLC ±-	APVD I.ENOMOTO 21DEC04	
	2 PLC ±-	NAME I.ENOMOTO	
3 PLC ±-	PRODUCT SPEC 製品規格	108-60047	TRAY P/N
4 PLC ±-	APPLICATION SPEC 取付適用規格	114-5255	PART NO.
ANGLES ±-	FINISH 仕上	WEIGHT	SIZE A3
MATERIAL 材料			CAGE CODE 00779
			DRAWING NO. C-5316077
			RESTRICTED TO
			SCALE 尺度 1:2
			SHEET 1 OF 3
			REV C

CUSTOMER DRAWING

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY, 1995.
 © COPYRIGHT 1995 By - ALL RIGHTS RESERVED.

LOC J	DIST	REVISIONS 変更		
P	LTR	DESCRIPTION	DATE	DWN
	-	SEE SHEET 1	-	-
				APVD

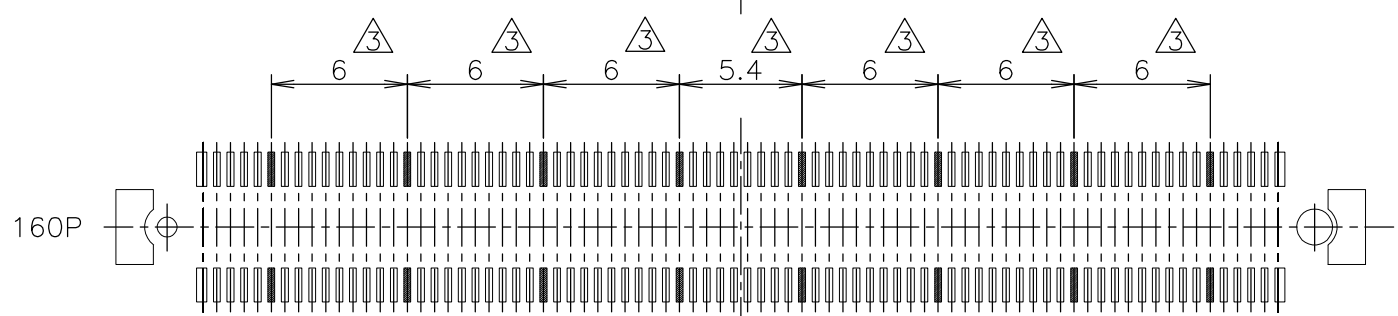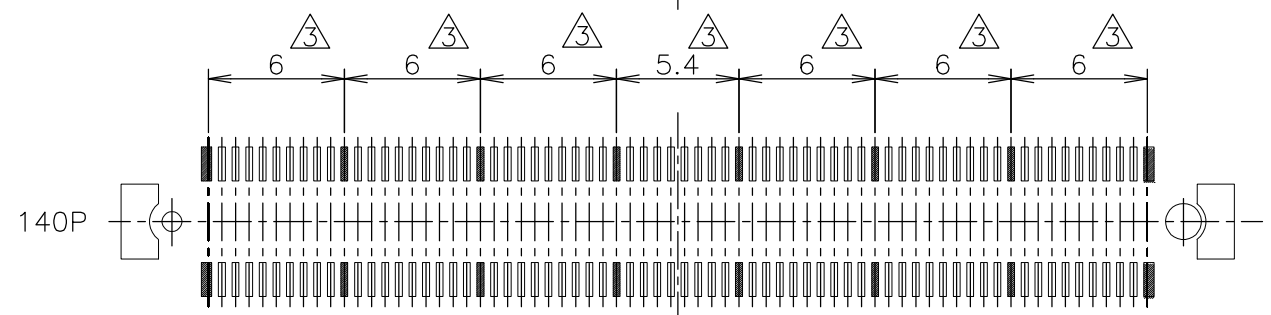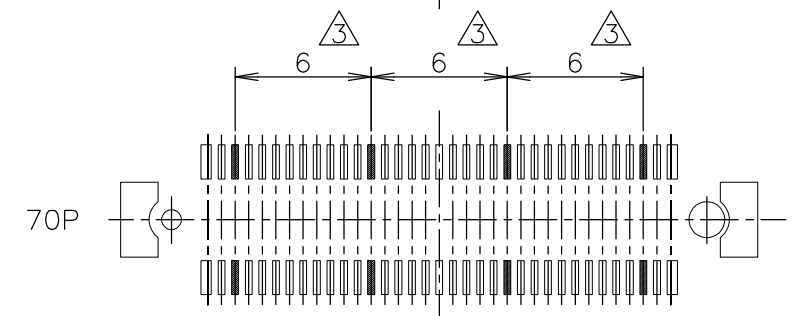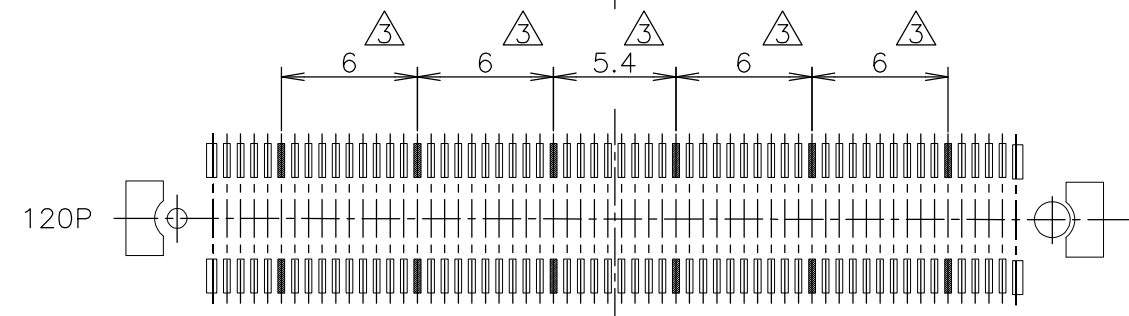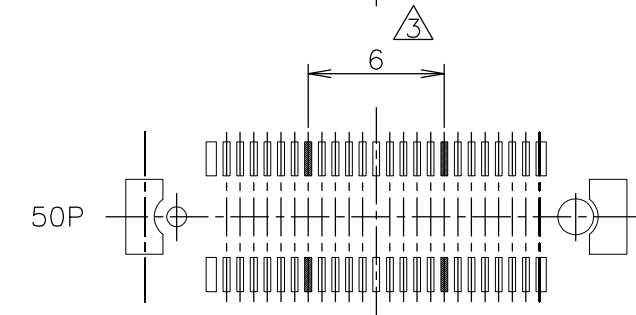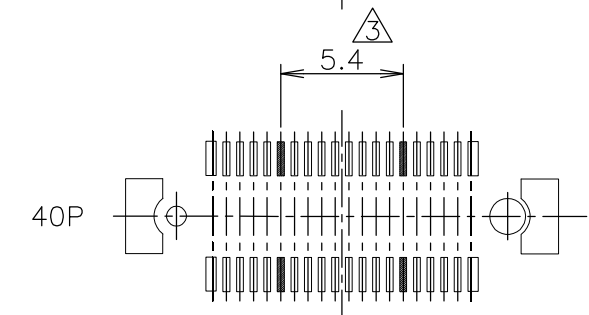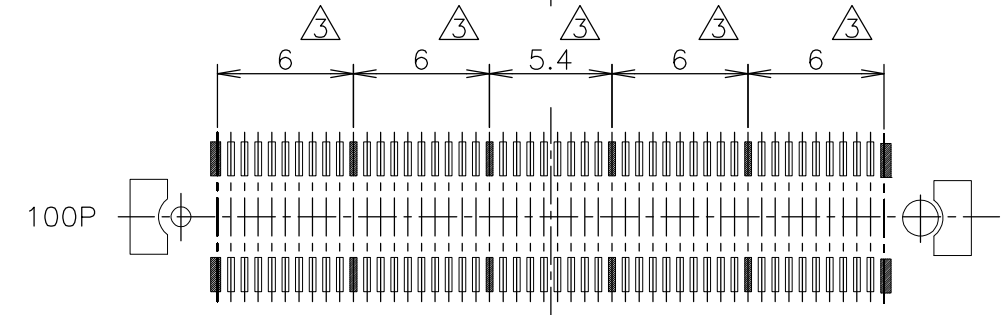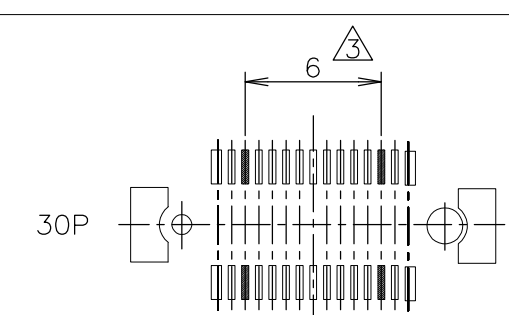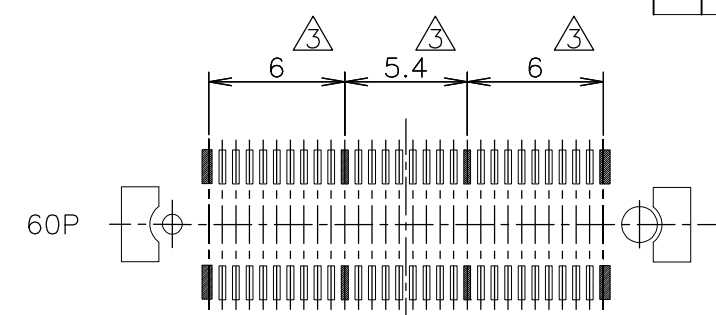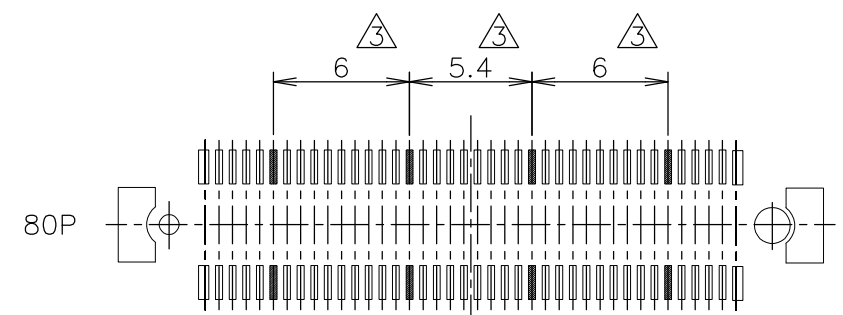

- ① MATERIAL ; HOUSING : HIGH TEMP THERMO PLASTIC
UL94V-0
- ② FINISH ; CONTACT : COPPER ALLOY
UNDER PL Ni 0.0013mm MIN ALL OVER.
CONTACT AREA 0.0002 MIN Au PL.
SOLDERING AREA: SIGNAL POS 0.00005 MIN Au PL.
GROUND POS 0.001 MIN TIN PL.
- ③ THIS POSITION IS GROUND CIRCUIT.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity		
DIMENSIONS: 単位: 耗 mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	NAME 名称		
0 PLC ± 0.3		PRODUCT SPEC 製品規格	TRAY ASSY		
1 PLC ± 0.3		APPLICATION SPEC 取付適用規格	FH 0.6BTB CONNECTOR		
2 PLC ± 0.3		WEIGHT	SIZE	CAGE CODE	DRAWING NO 番号
3 PLC ± 0.3		CUSTOMER DRAWING	A3	00779	G-5316077
4 PLC ± 0.3			SCALE 尺度	3:1	SHEET 3 OF 3
ANGLES ± 3'					
FINISH 仕上					
MATERIAL 材料					