

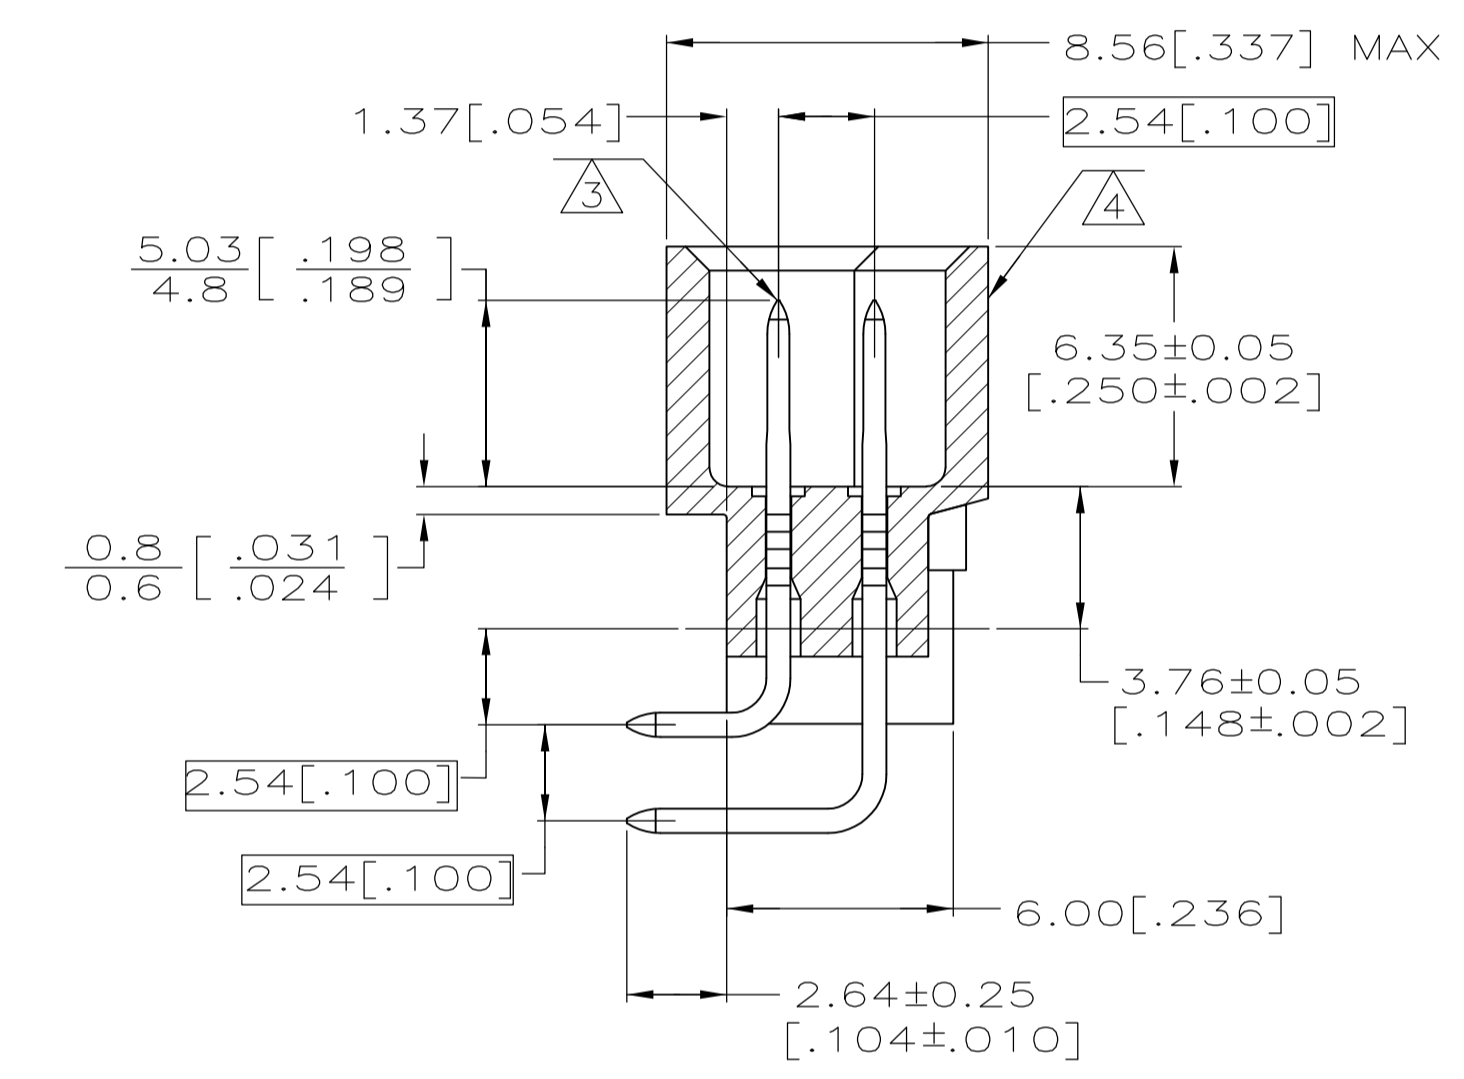
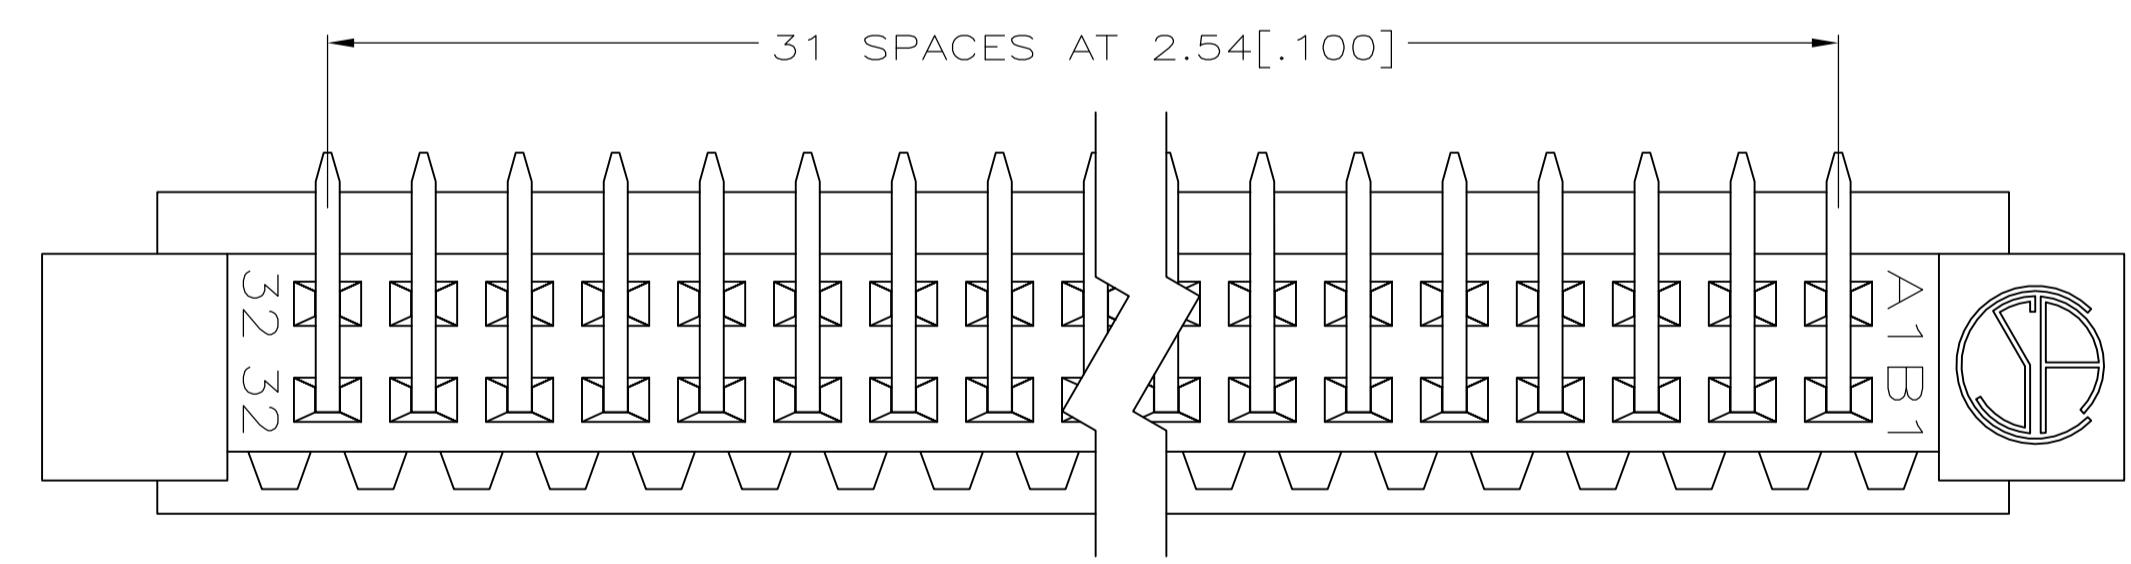
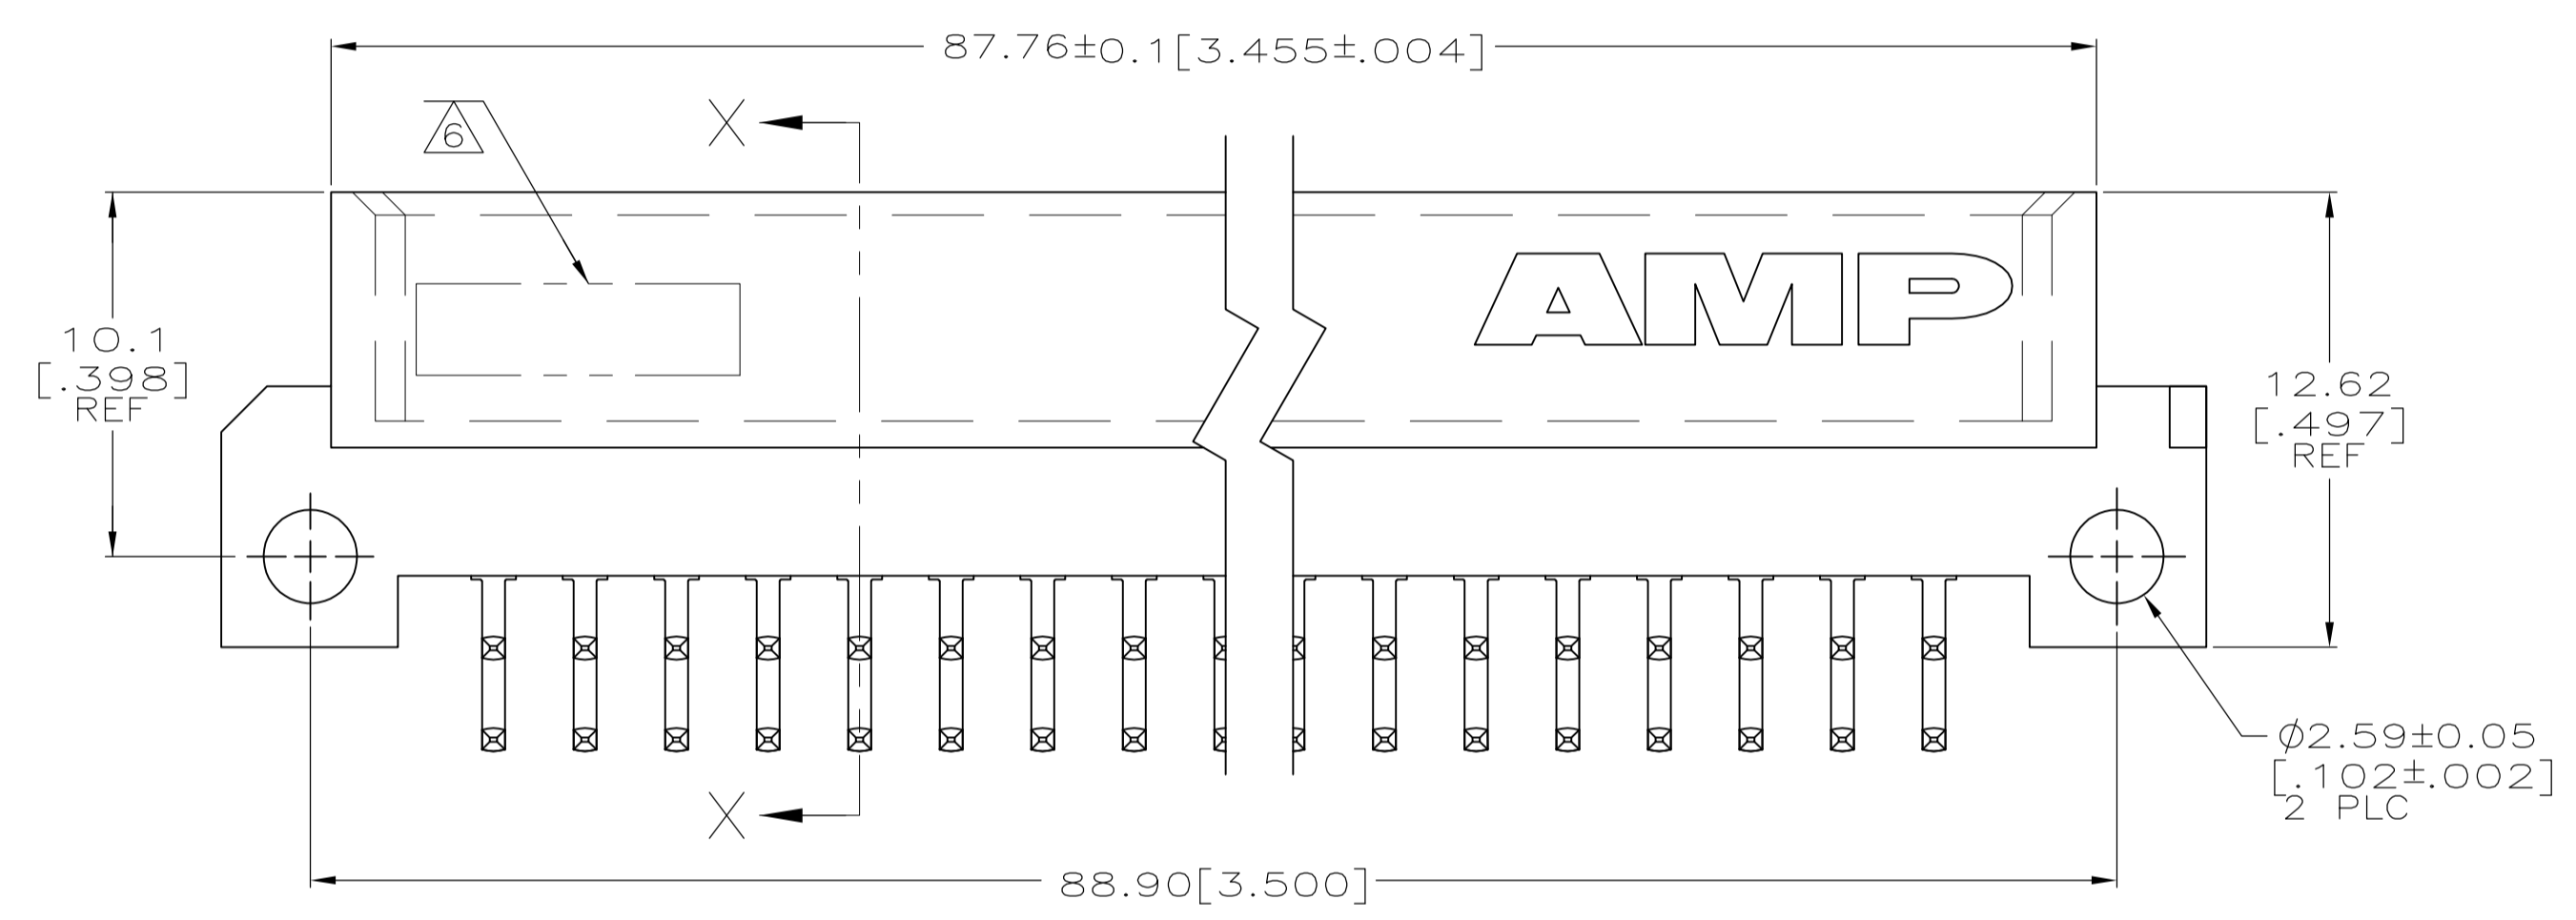


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ MARKING ON THIS SIDE.
- ⑤ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑥ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

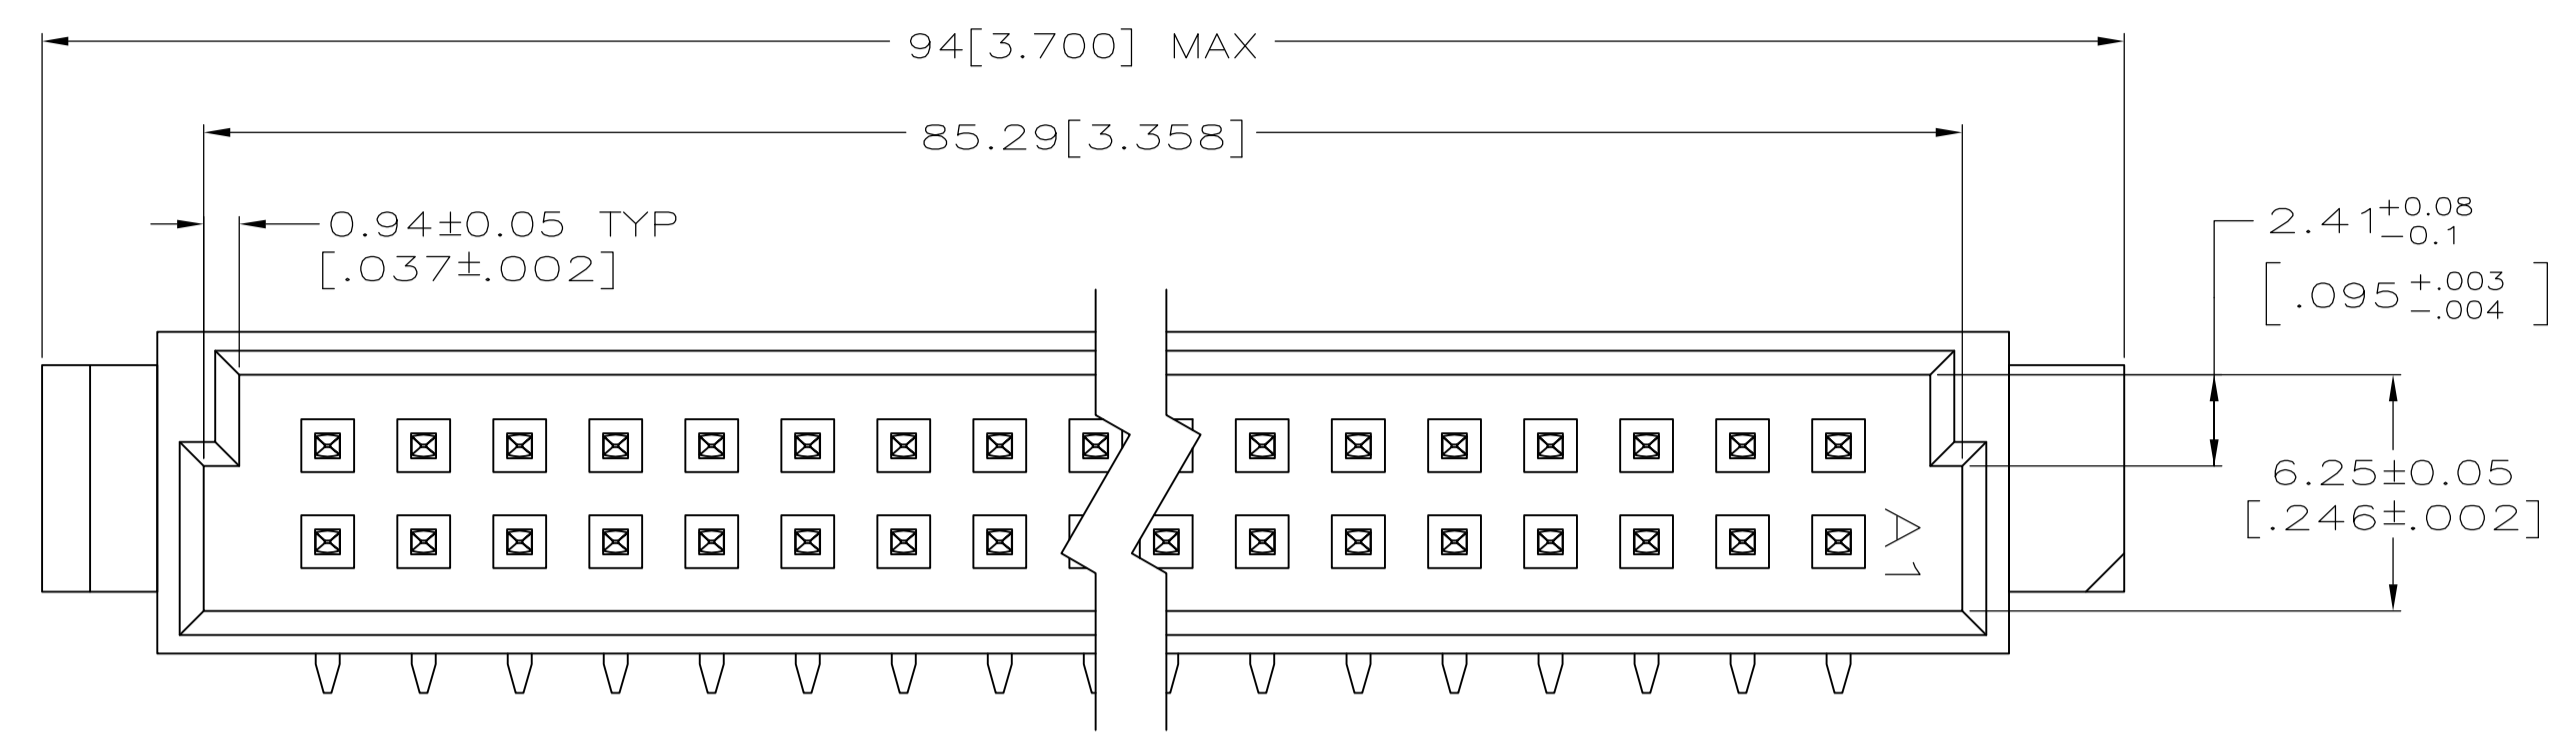

SECTION X-X

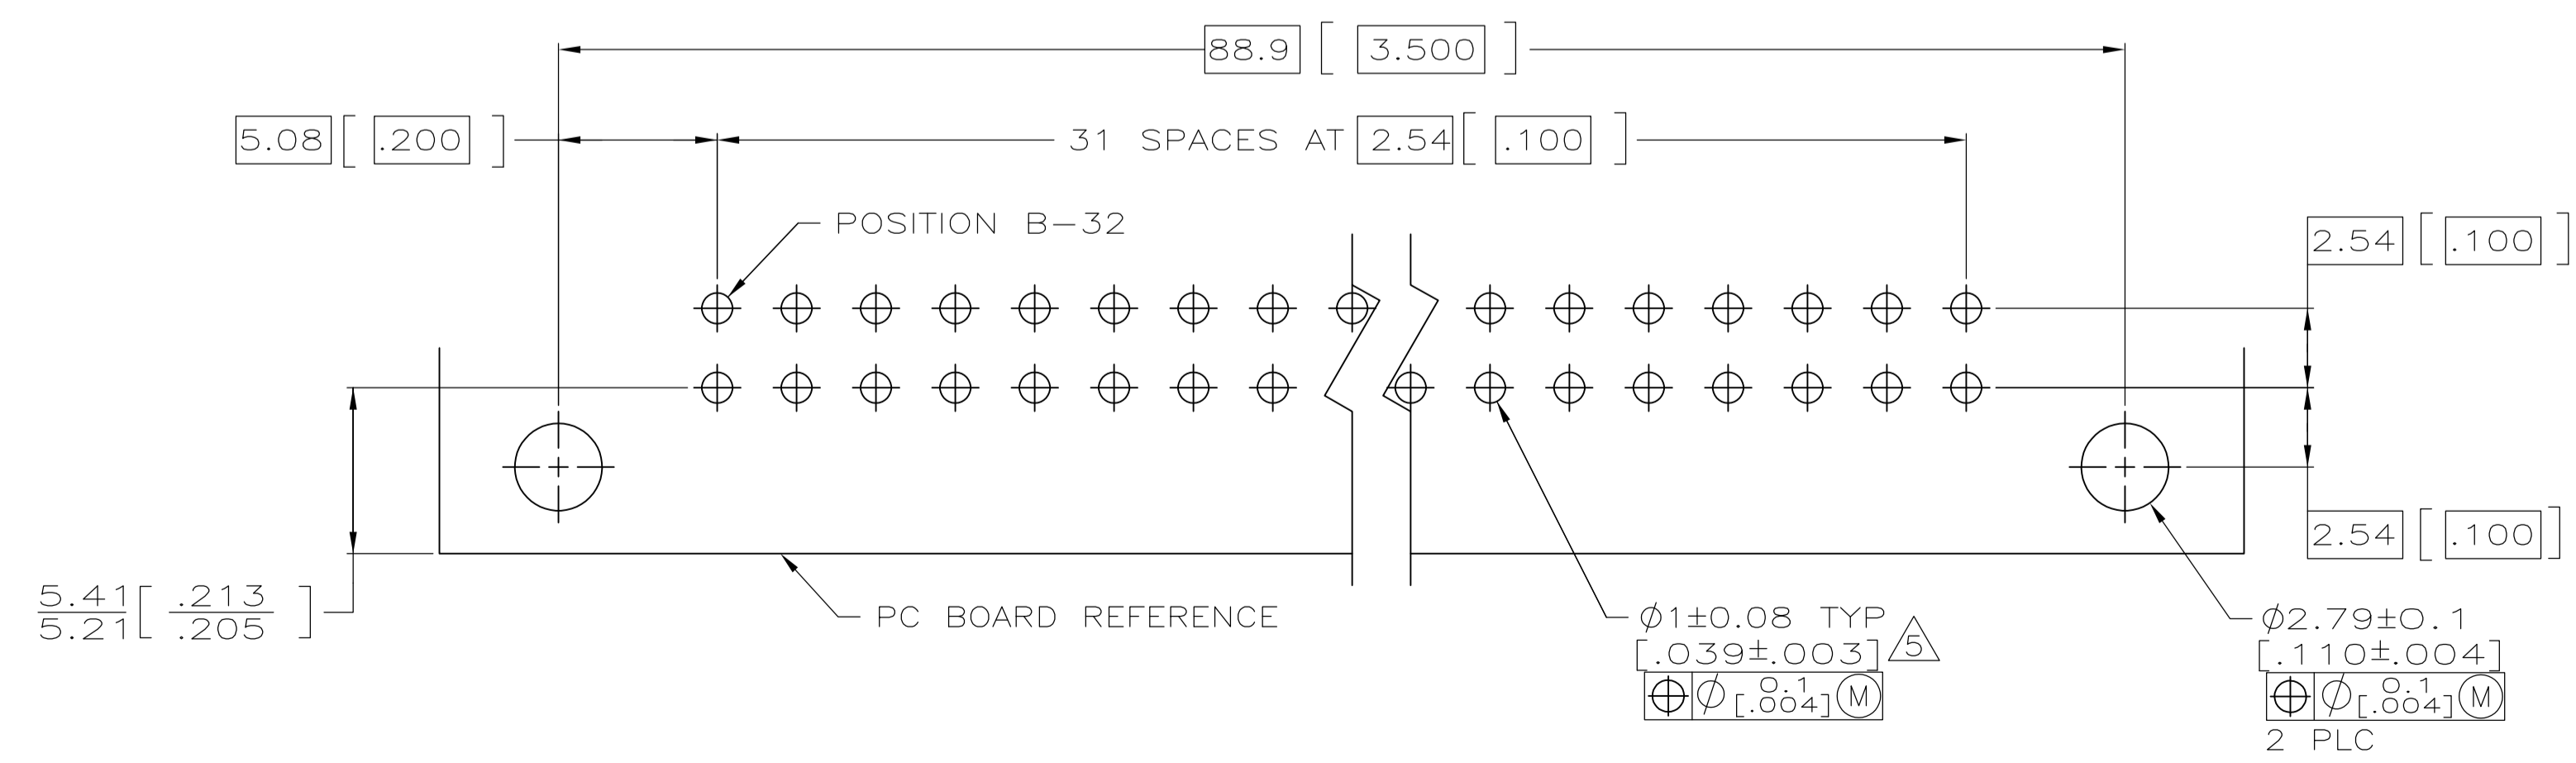

PC BOARD LAYOUT

1-32	X	X	64	5536052-5
POSITIONS LOADED	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
	ROWS LOADED			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	OSMAYOS
mm [INCHES]		CHK A. SHARPE	OSMAYOS
0 PLC ± -		APVD A. SHARPE	OSMAYOS
1 PLC ± -		PRODUCT SPEC	
2 PLC ± 0.13[.005]		APPLICATION SPEC	
3 PLC ± -			
4 PLC ± -			
ANGLES ± -			
MATERIAL	FINISH	SIZE	CAGE CODE
① ②	③	A1	00779
CUSTOMER DRAWING		DRAWING NO	5536052
		SCALE	5:1
		SHEET	1 of 1
		REV	P

STE TE Connectivity

ASSEMBLY, PIN, EUROCARD, TYPE B, 64 POSITION, 2.64[.104] SOLDER POST