


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APVD
HM	00	D	REVISED PER ECO-12-012703	12JUL12	JB HMR

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: HOUSING— POLYCARBONATE BLUE. TERMINAL— PHOSPHOR BRONZE PLATED WITH 1.27μm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA OVER 2.54μm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG SOLID WIRE, 0.74–0.86 [.029–.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- 4 TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5 1000 ASSEMBLIES PER PACKAGE.
- 6 100 ASSEMBLIES PER PACKAGE.

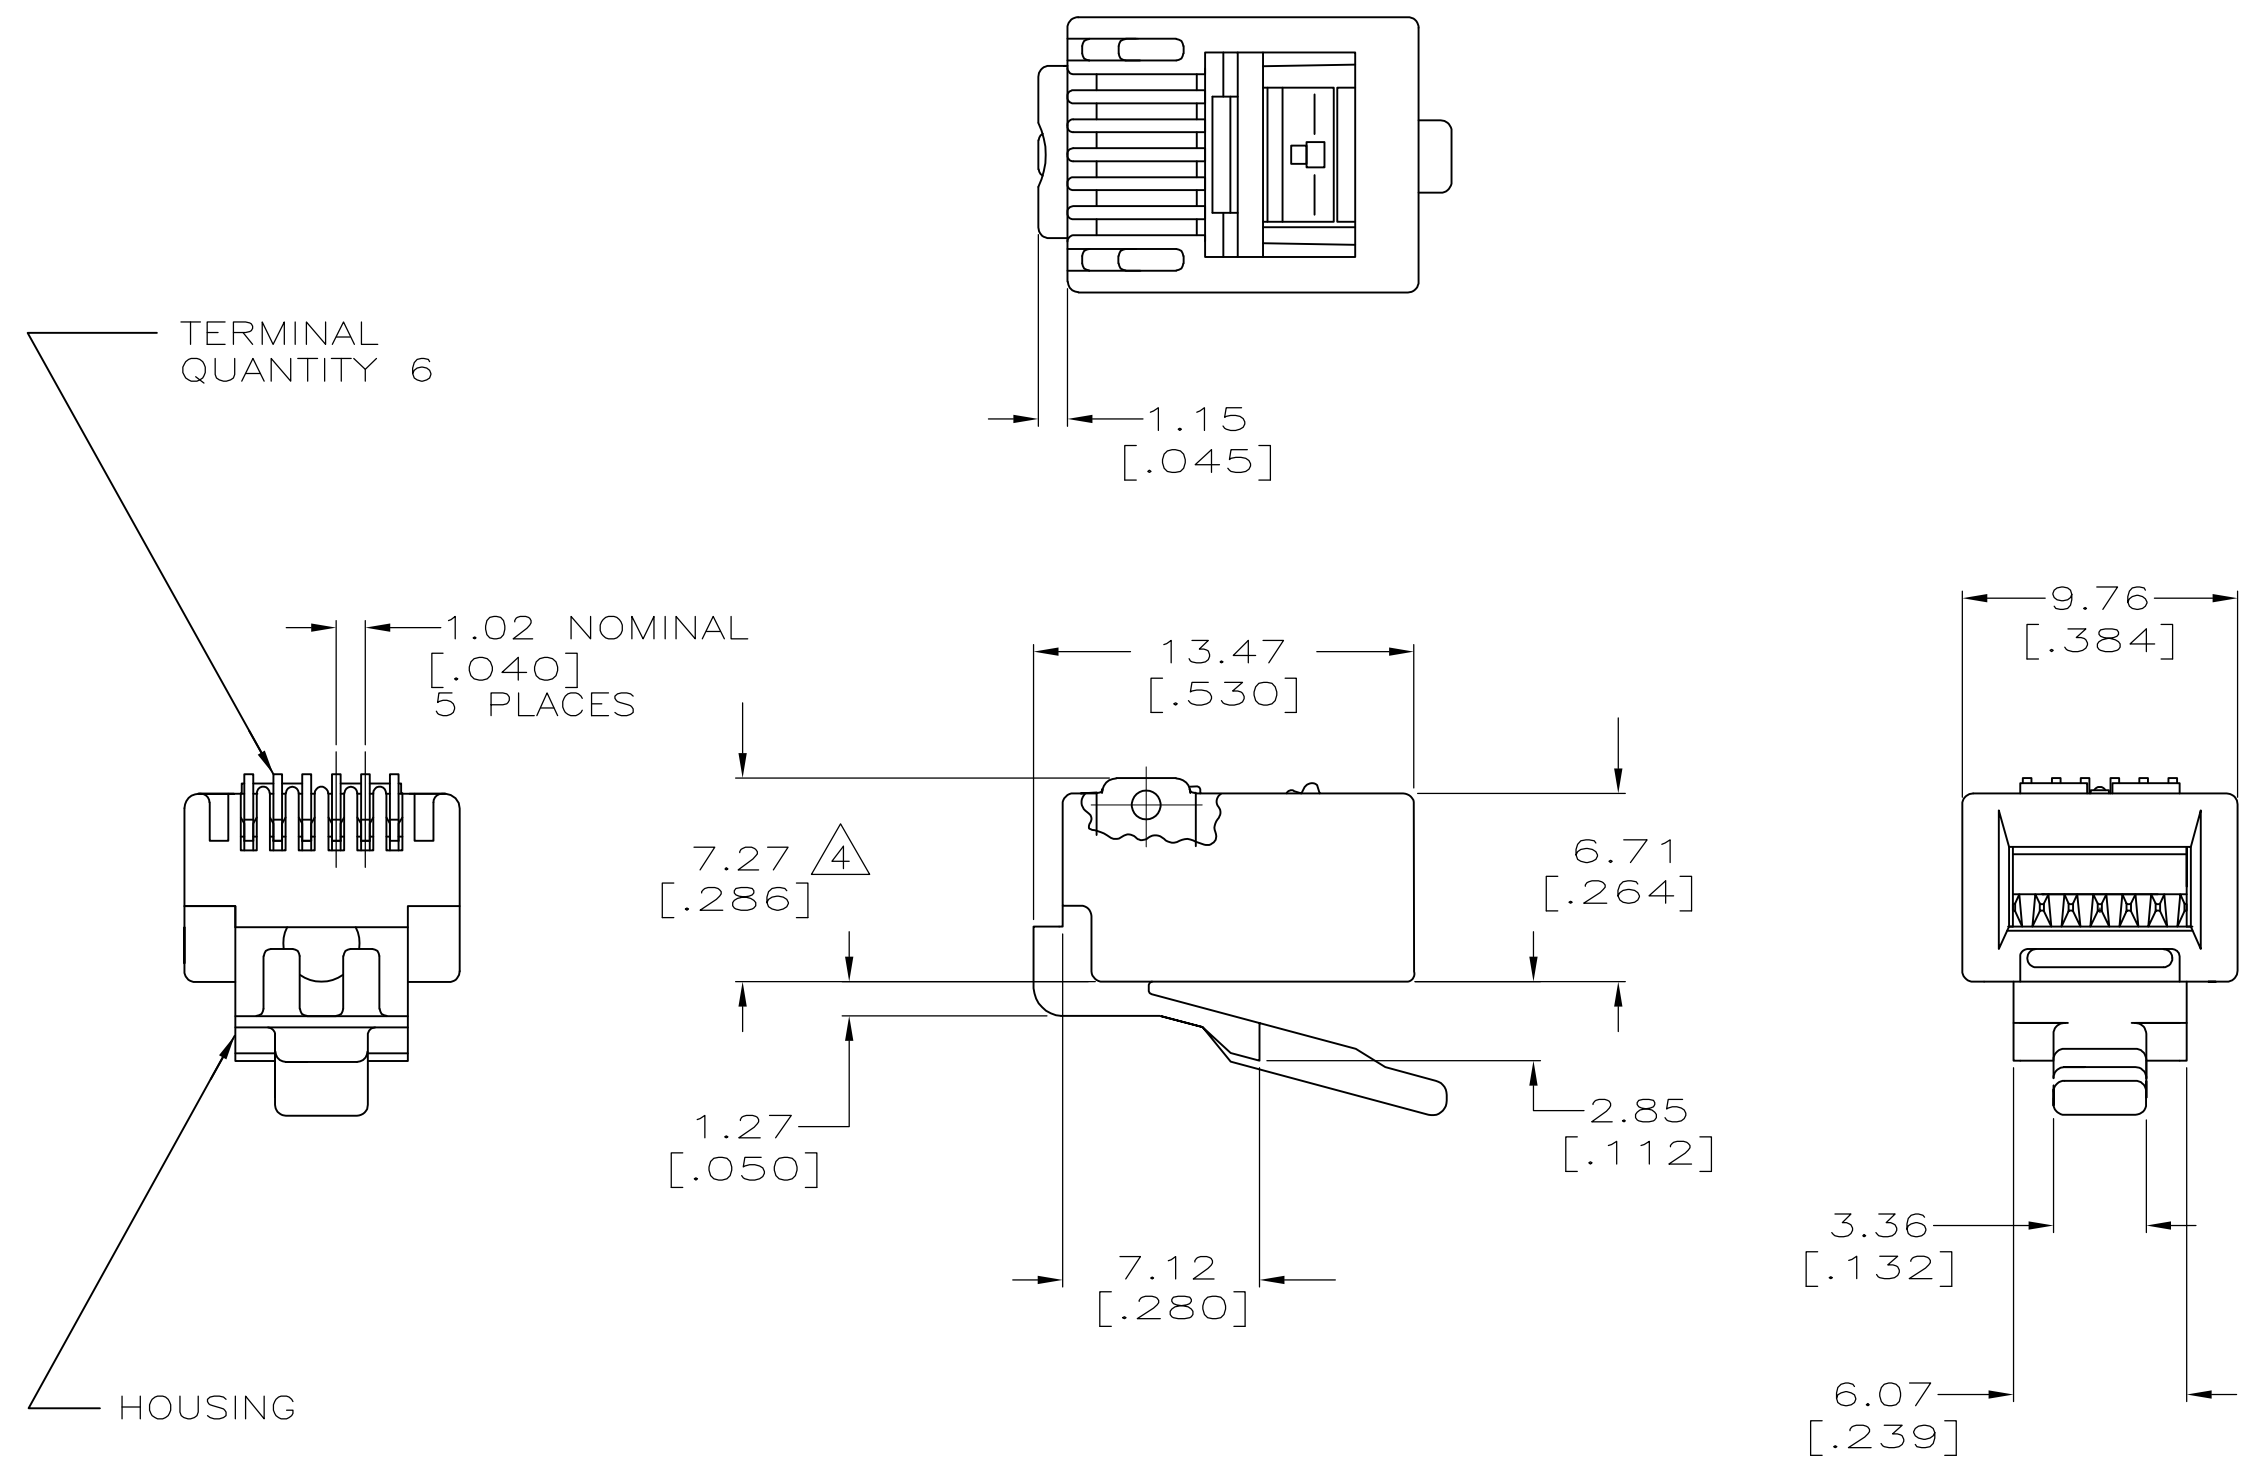

6	5-557970-3
5	5-557970-2
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 29FEB2008	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK B. MCNEILL 29FEB2008	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. MCNEILL 29FEB2008	PRODUCT SPEC	
0 PLC ± -	1 PLC ± - 1	108-1163		
2 PLC ± -	3 PLC ± -	APPLICATION SPEC		
4 PLC ± -	ANGLES ± -	114-6016		
MATERIAL 2	FINISH 2	WEIGHT -	SIZE A2	CAGE CODE 00779
		DRAWING NO. 557970		RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV D