

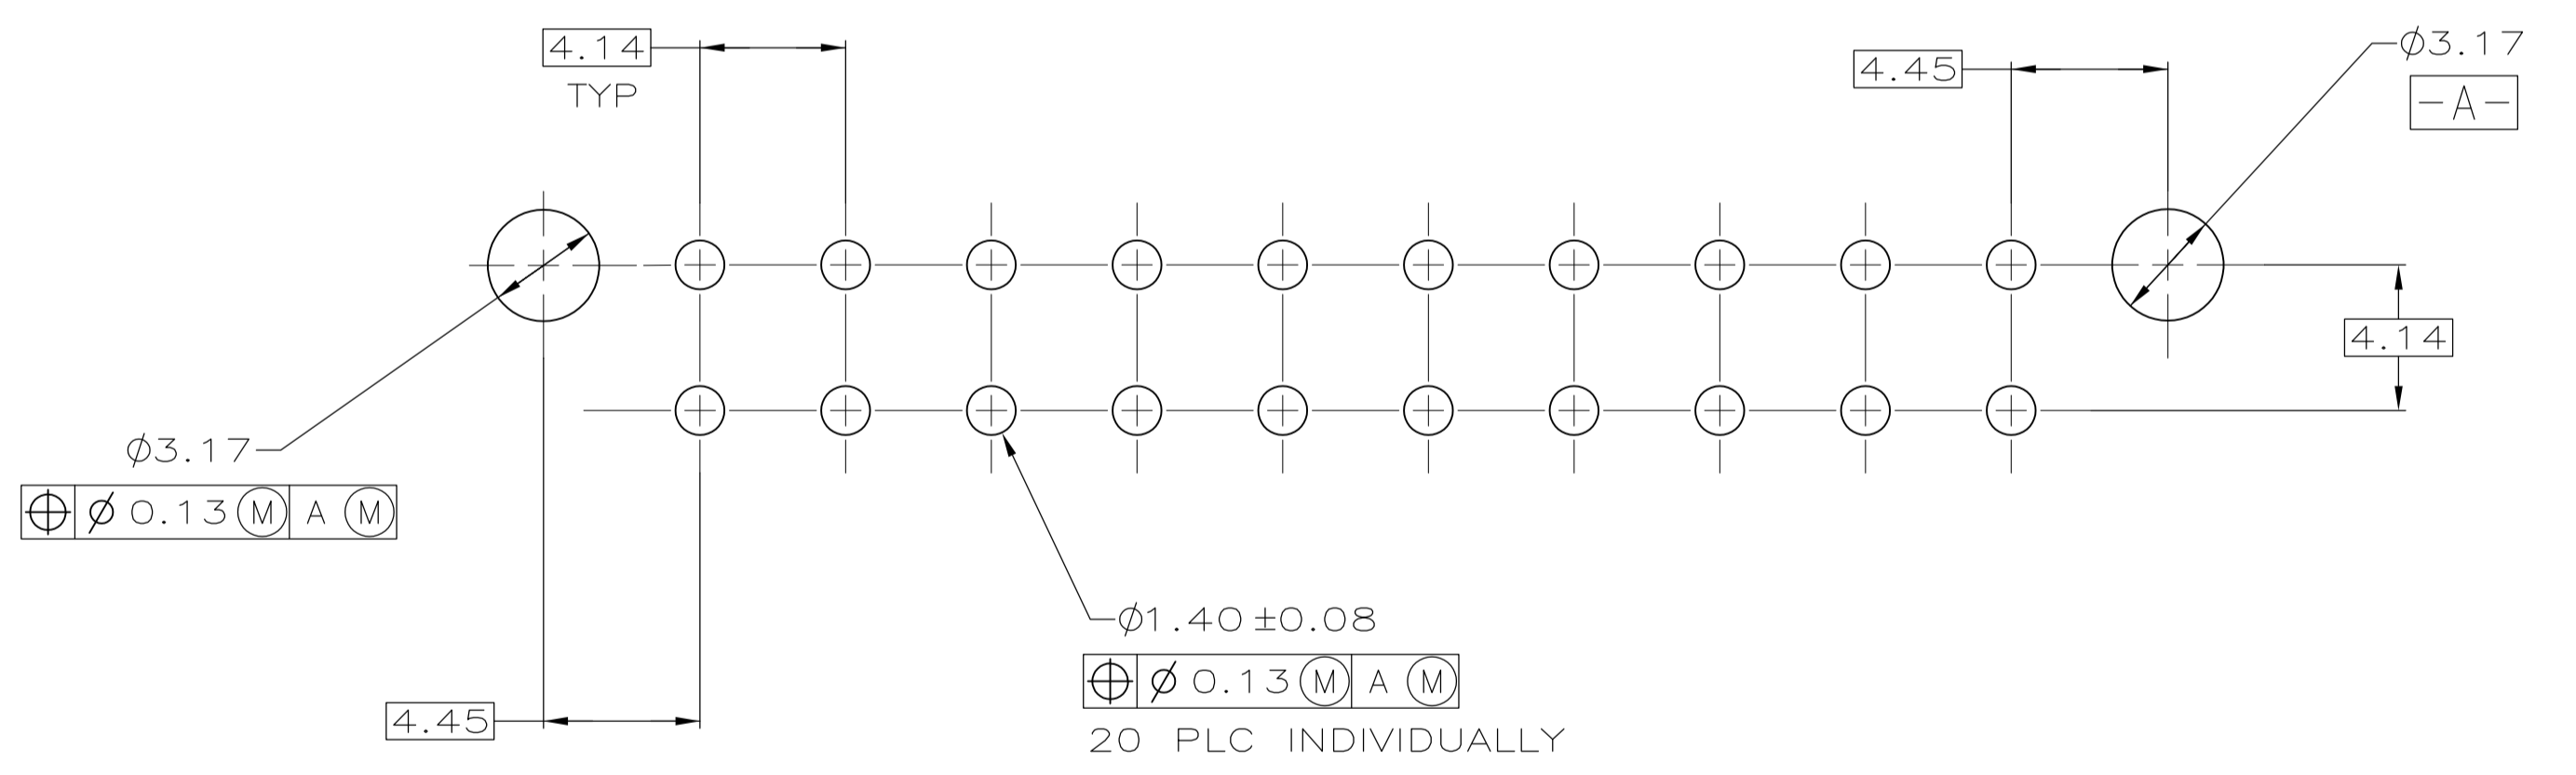


1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- ⚠️ 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- ⚠️ 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- ⚠️ 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- ⚠️ 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

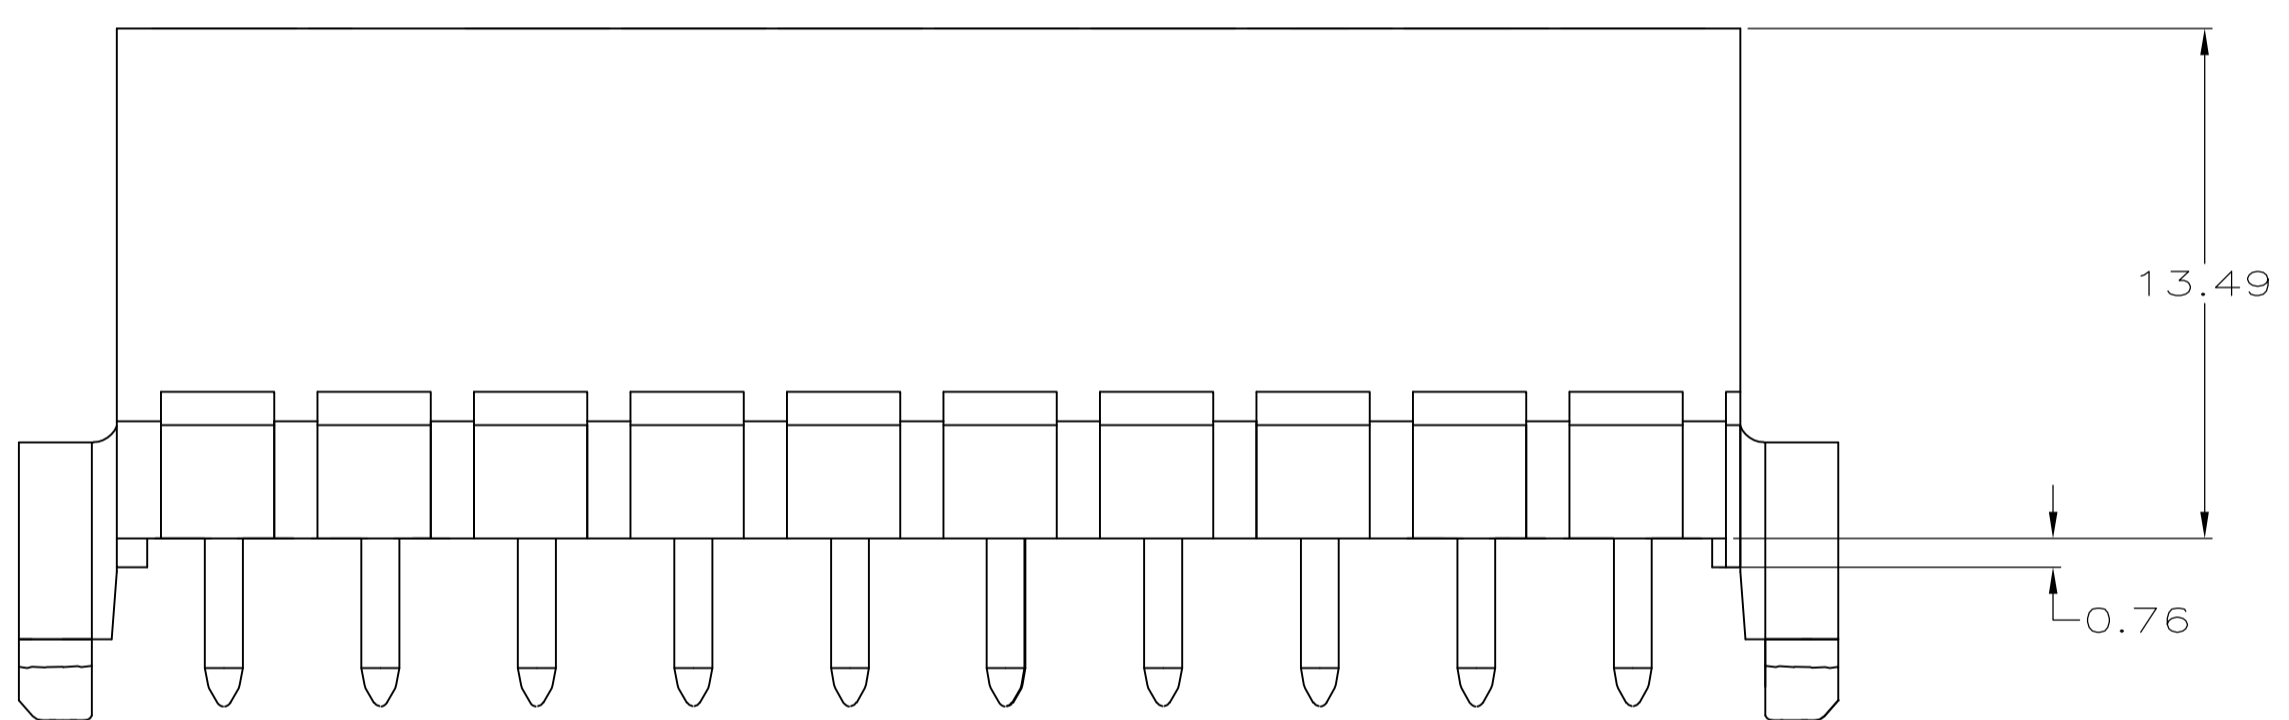

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

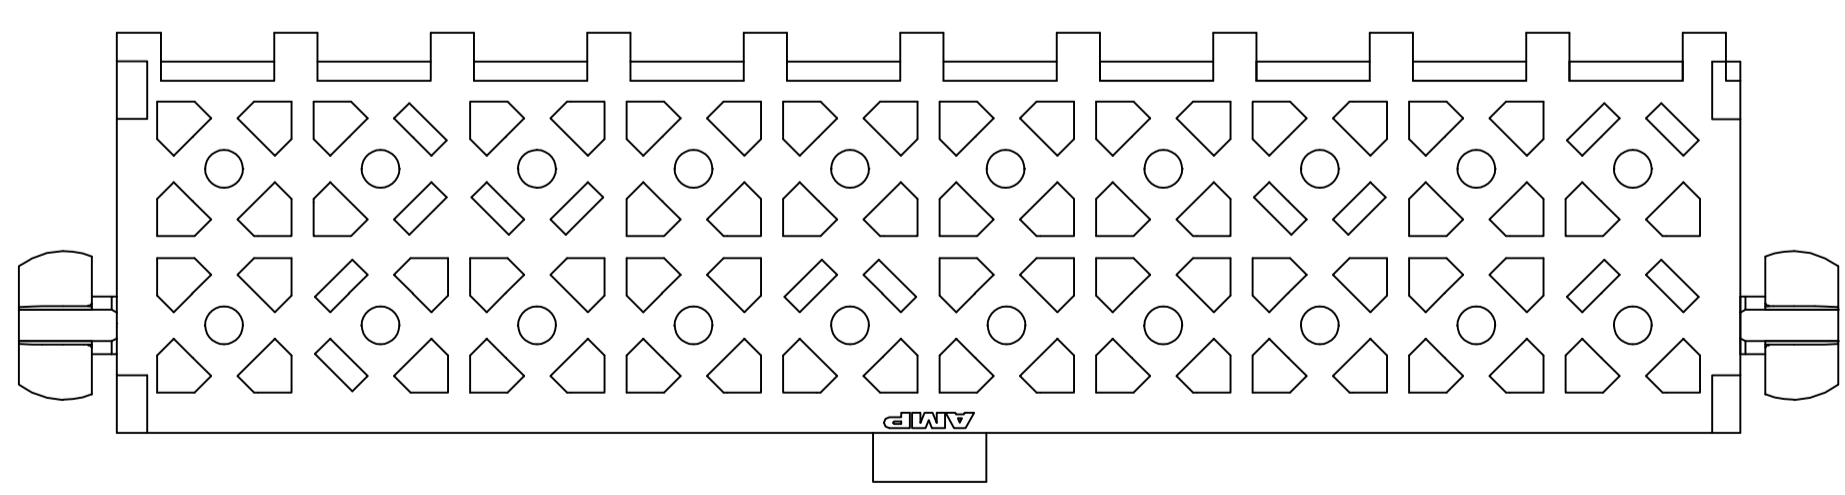

BRASS, GOLD ⚠️	NYLON, 94V-0, WHITE	1-794070-1
BRASS, TIN ⚠️	NYLON, 94V-0, WHITE	1-794070-0
BRASS, GOLD ⚠️	NYLON, 94V-0, WHITE	794070-2
BRASS, TIN LEAD ⚠️	NYLON, 94V-0, WHITE	794070-1
PIN CONTACT MATERIAL AND FINISH		PART NUMBER
HOUSING MATERIAL AND COLOR		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0.150
	0.150	0.150
	0.150	0.150
	0.150	0.150
	0.150	0.150
	0.150	0.150
	0.150	0.150
	0.150	0.150

DRAWN	K. WHITAKER	6-12-95
CHK	R. SWING	6-12-95
APP'D	R. ORSTAD	6-13-95
NAME	STE TE Connectivity	
PRODUCT SPEC	HEADER ASSEMBLY, 20 CIRCUIT, DOUBLE ROW VERTICAL, MINI-UNIVERSAL MATE-N-LOK	
APPLICATION SPEC	SIZE	CAGE CODE
	A1	00779
MATERIAL	WEIGHT	DRAWING NO.
SEE TABLE		794070
FINISH	SCALE	SHEET
SEE TABLE	5:1	1 OF 1
CUSTOMER DRAWING	REV	E