





| LOC | | DIST | | REVISIONS | | | | | |
|-----|----|------|-----|---------------------------|--|--|-----------|-----|------|
| CM | 00 | P | LYR | DESCRIPTION | | | DATE | DWN | APVD |
| | | F | | REVISED PER ECR-17-015775 | | | 03NOV2017 | BDA | KR |
| | | | | | | | | | |
| | | | | | | | | | |

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

 UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN


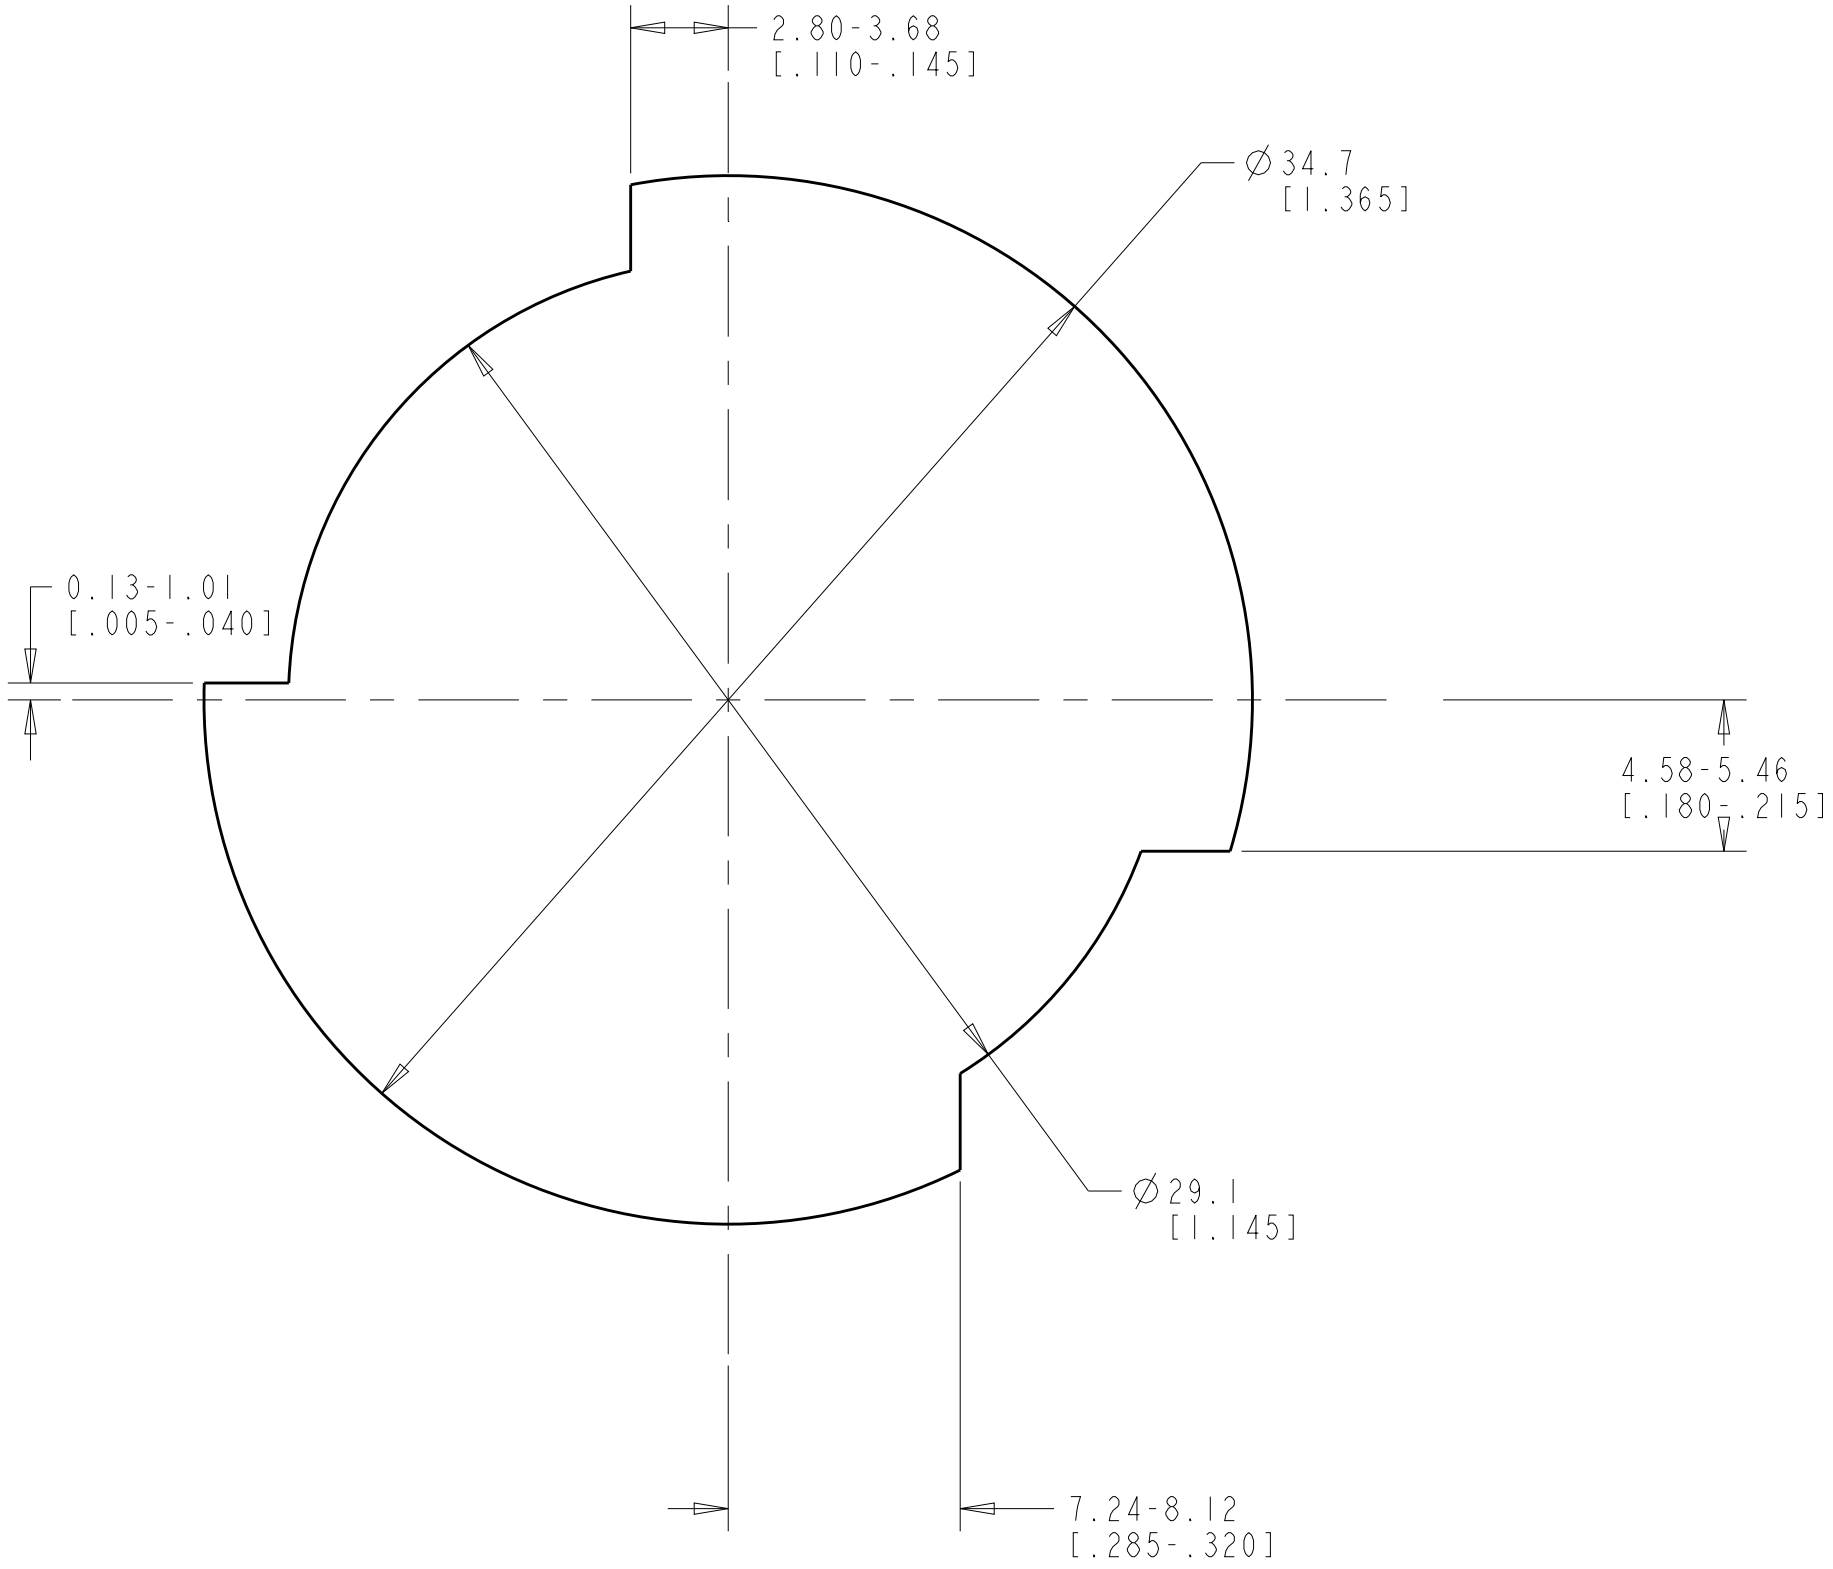


RECOMMENDED CUT OUT

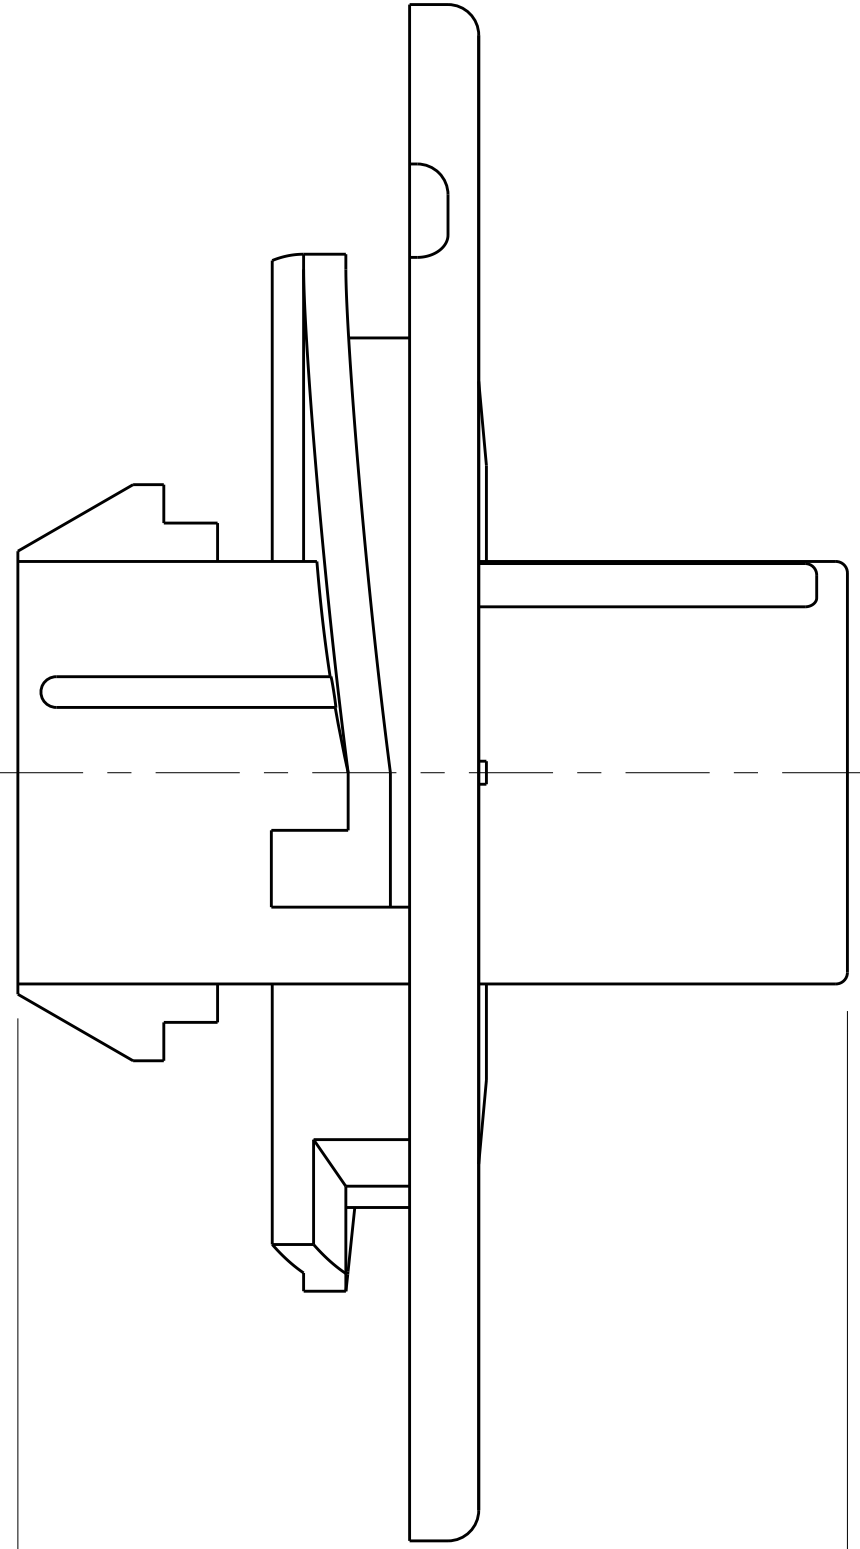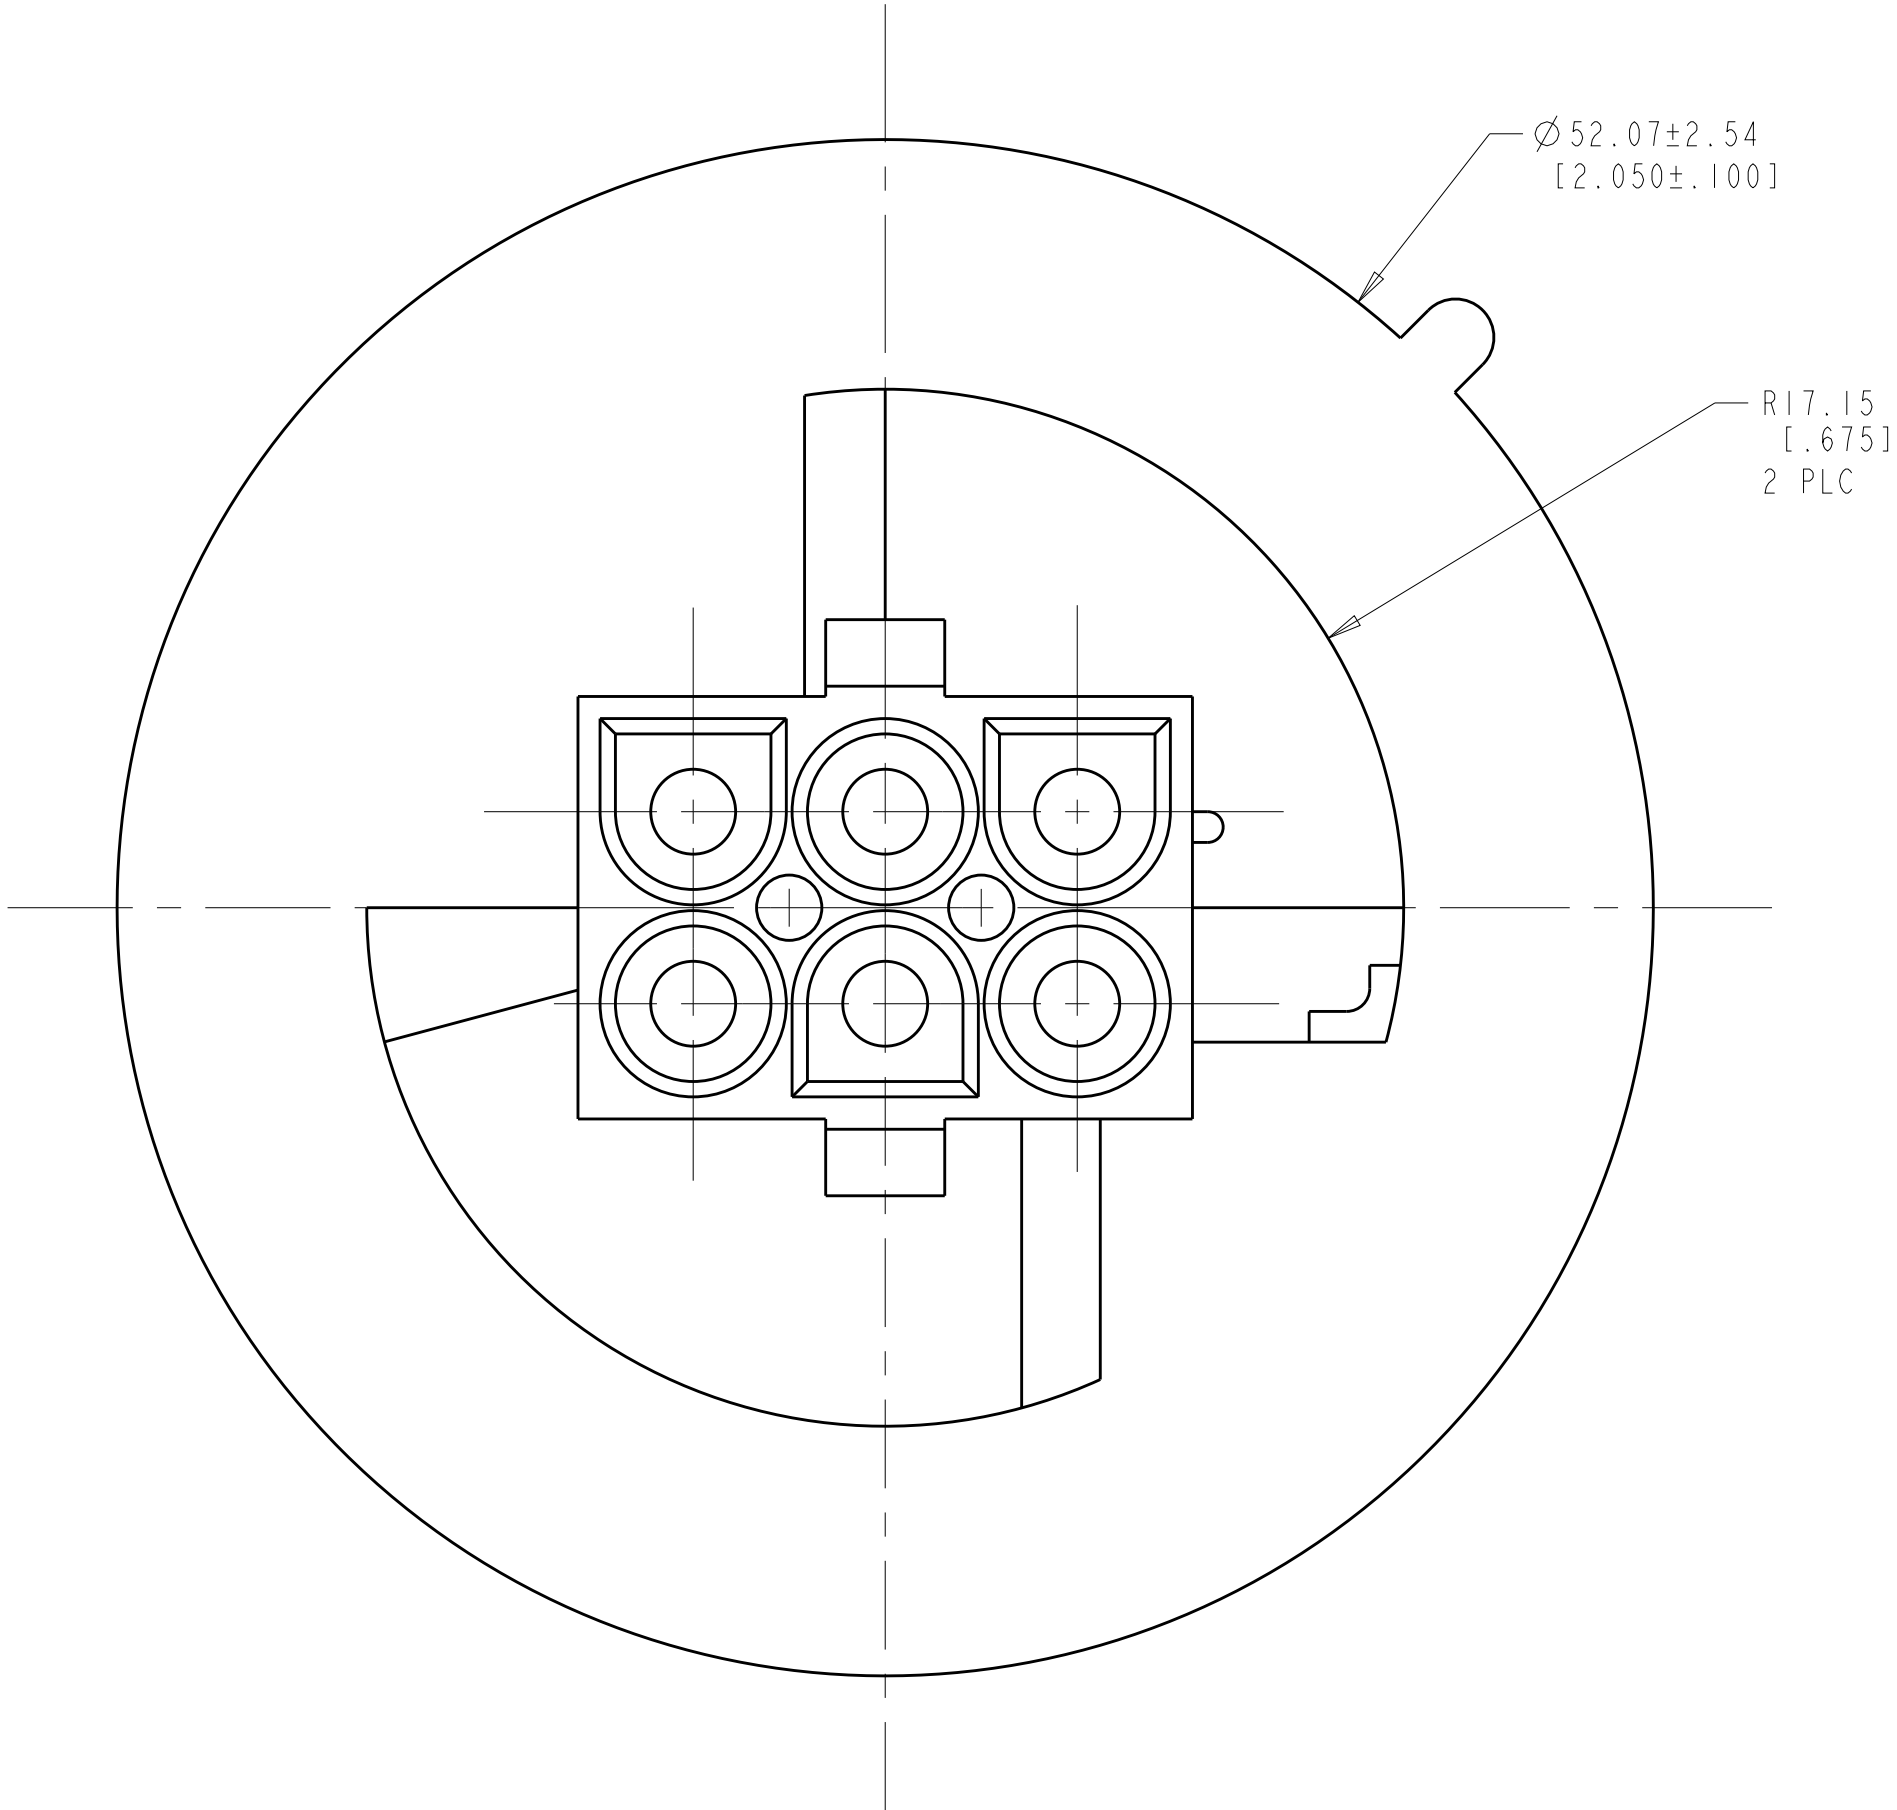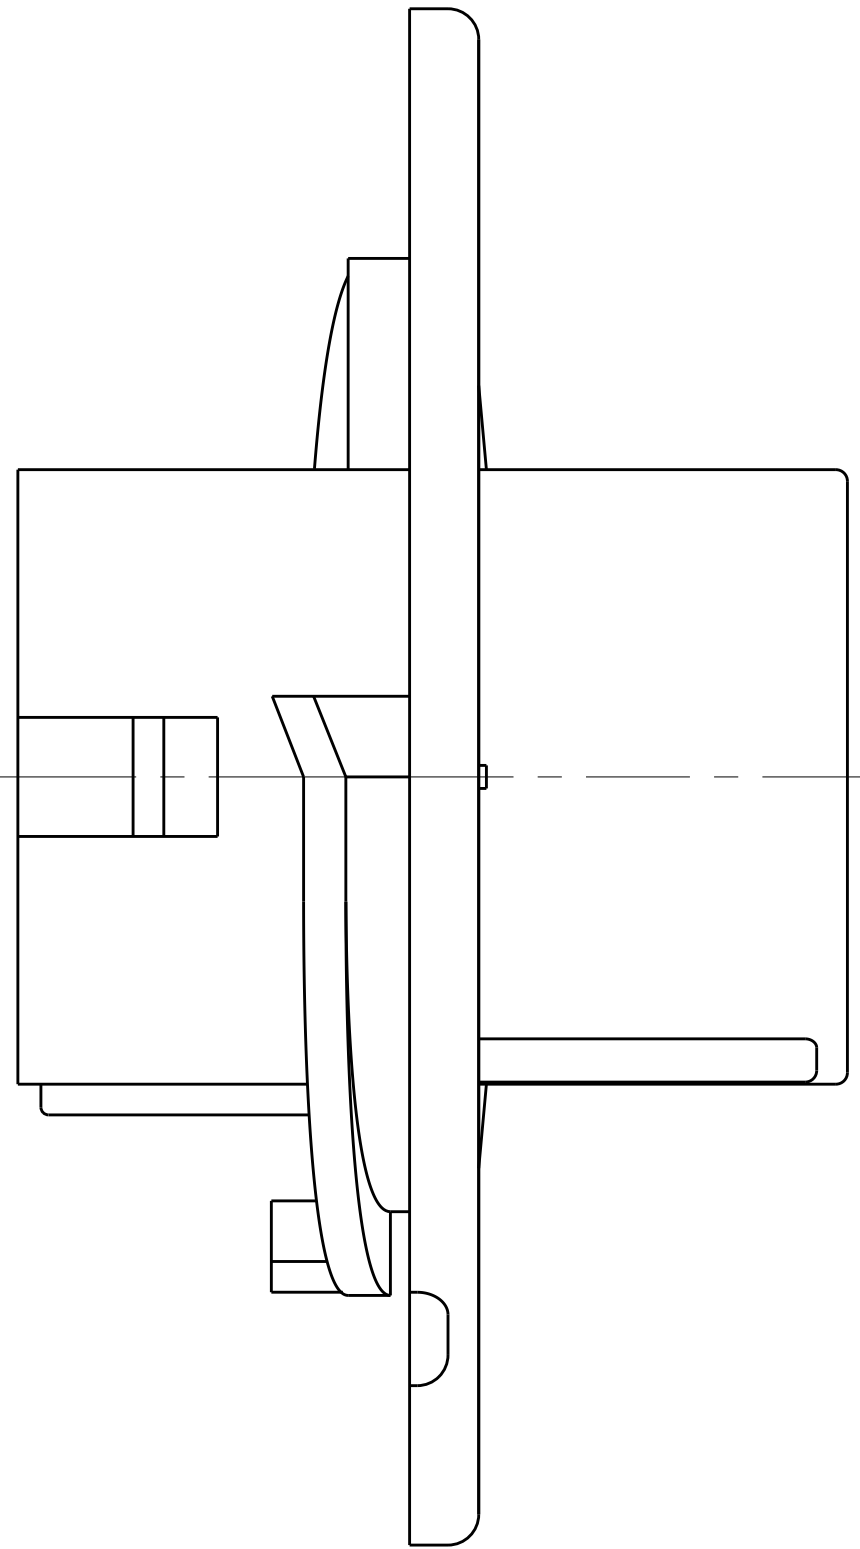


12.95
[.510]

27.43±0.38
[1.080±.015]

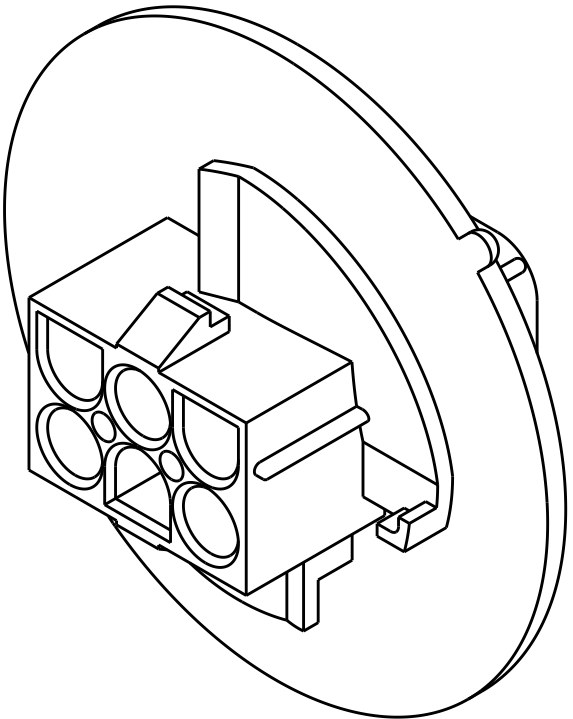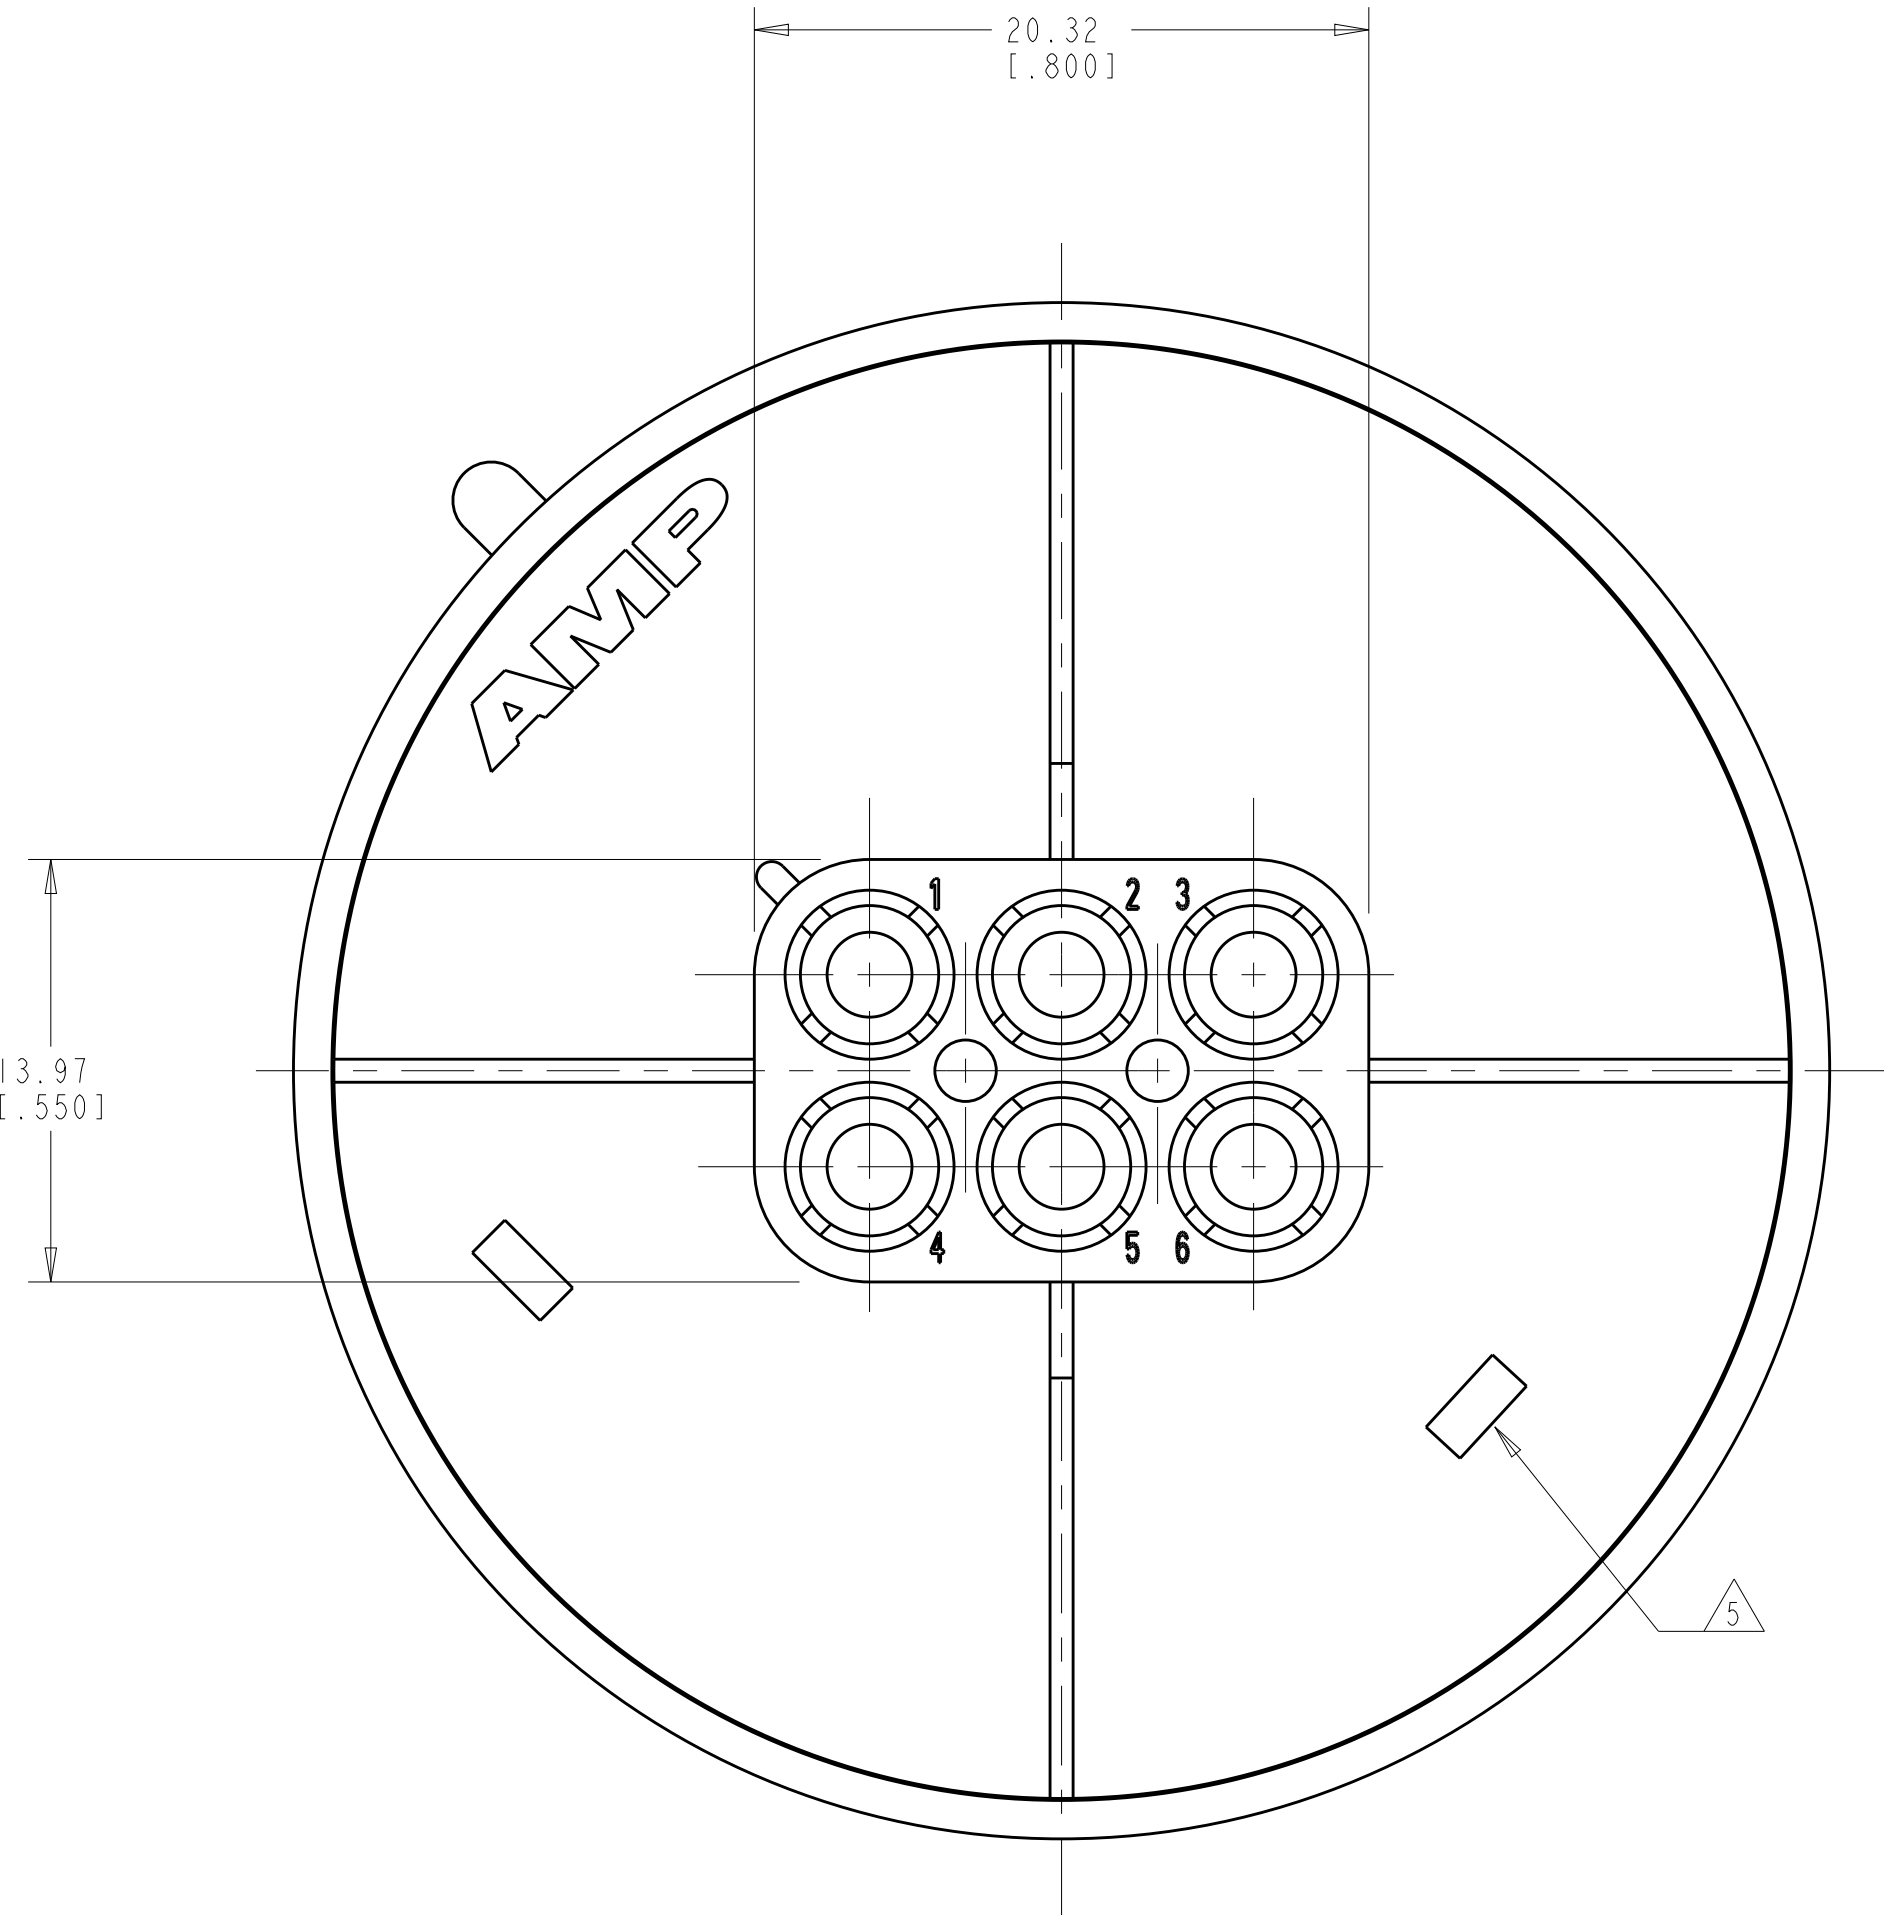

3-DIMENSIONAL MODEL
SCALE 2:1

| | |
|---------|-------------|
| BLACK | I-794760-9 |
| GRAY | I-794760-8 |
| BLUE | I-794760-6 |
| GREEN | I-794760-5 |
| YELLOW | I-794760-4 |
| ORANGE | I-794760-3 |
| RED | I-794760-2 |
| BROWN | I-794760-1 |
| NATURAL | 794760-1 |
| COLOR | PART NUMBER |

| | | | | |
|---|--|------------------------------------|---|-------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN K. WHITAKER 20-JUNE-2000 |  TE Connectivity | |
| DIMENSIONS: mm[INCHES] | | CHK K. COBLE 20-JUNE-2000 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD K. COBLE 20-JUNE-2000 | NAME | |
| 0 PLC ±.005 1 PLC ±.005 2 PLC ±.005 3 PLC ±.005 4 PLC ±.005 ANGLES ±0° 30' | | PRODUCT SPEC | CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL | |
| MATERIAL NYLON UL 94V-0, WHITE | | APPLICATION SPEC | SIZE CAGE CODE DRAWING NO | |
| FINISH | | WEIGHT | A1 00779 C=794760 | |
| CUSTOMER DRAWING | | SCALE 4:1 | SHEET 1 OF 1 | REV F |