





LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		F		REVISED PER ECR-17-015775		03NOV2017	BDA	KR

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

 UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN


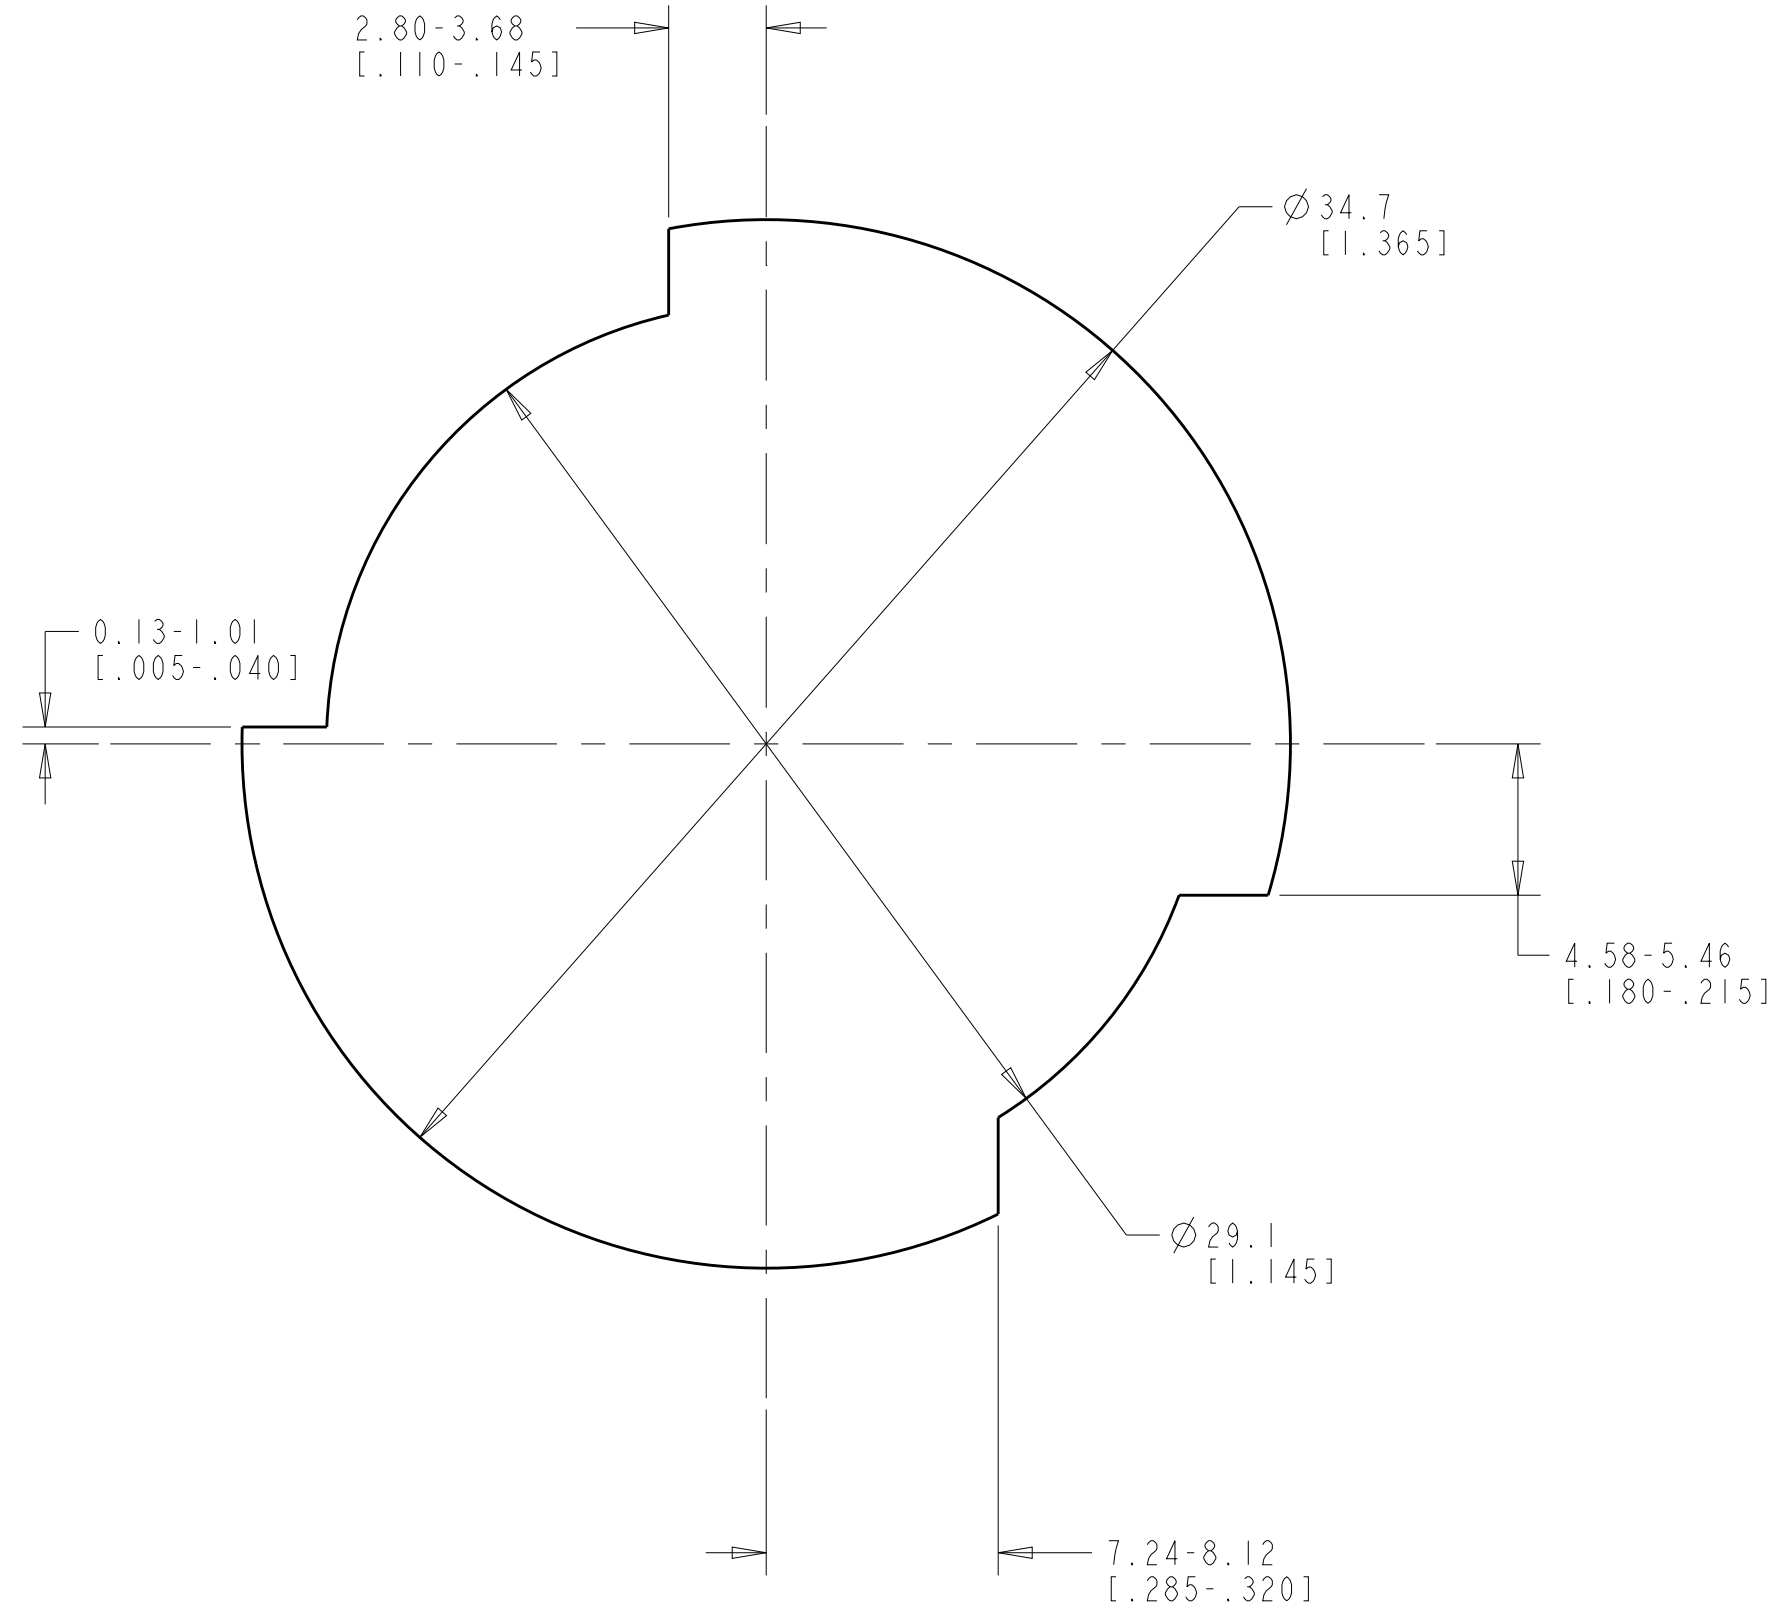


RECOMMENDED CUT OUT

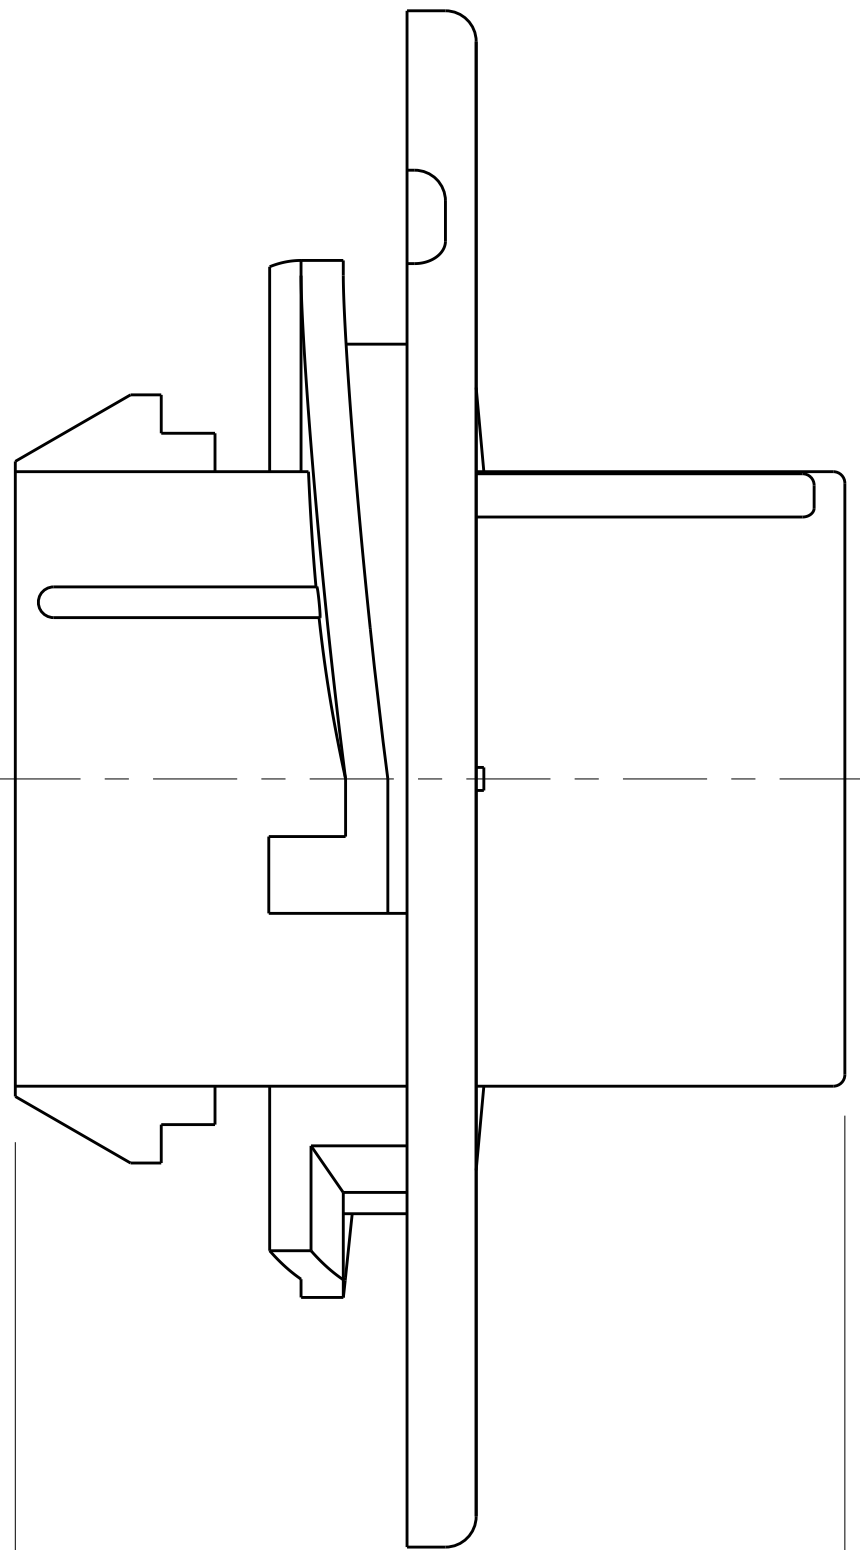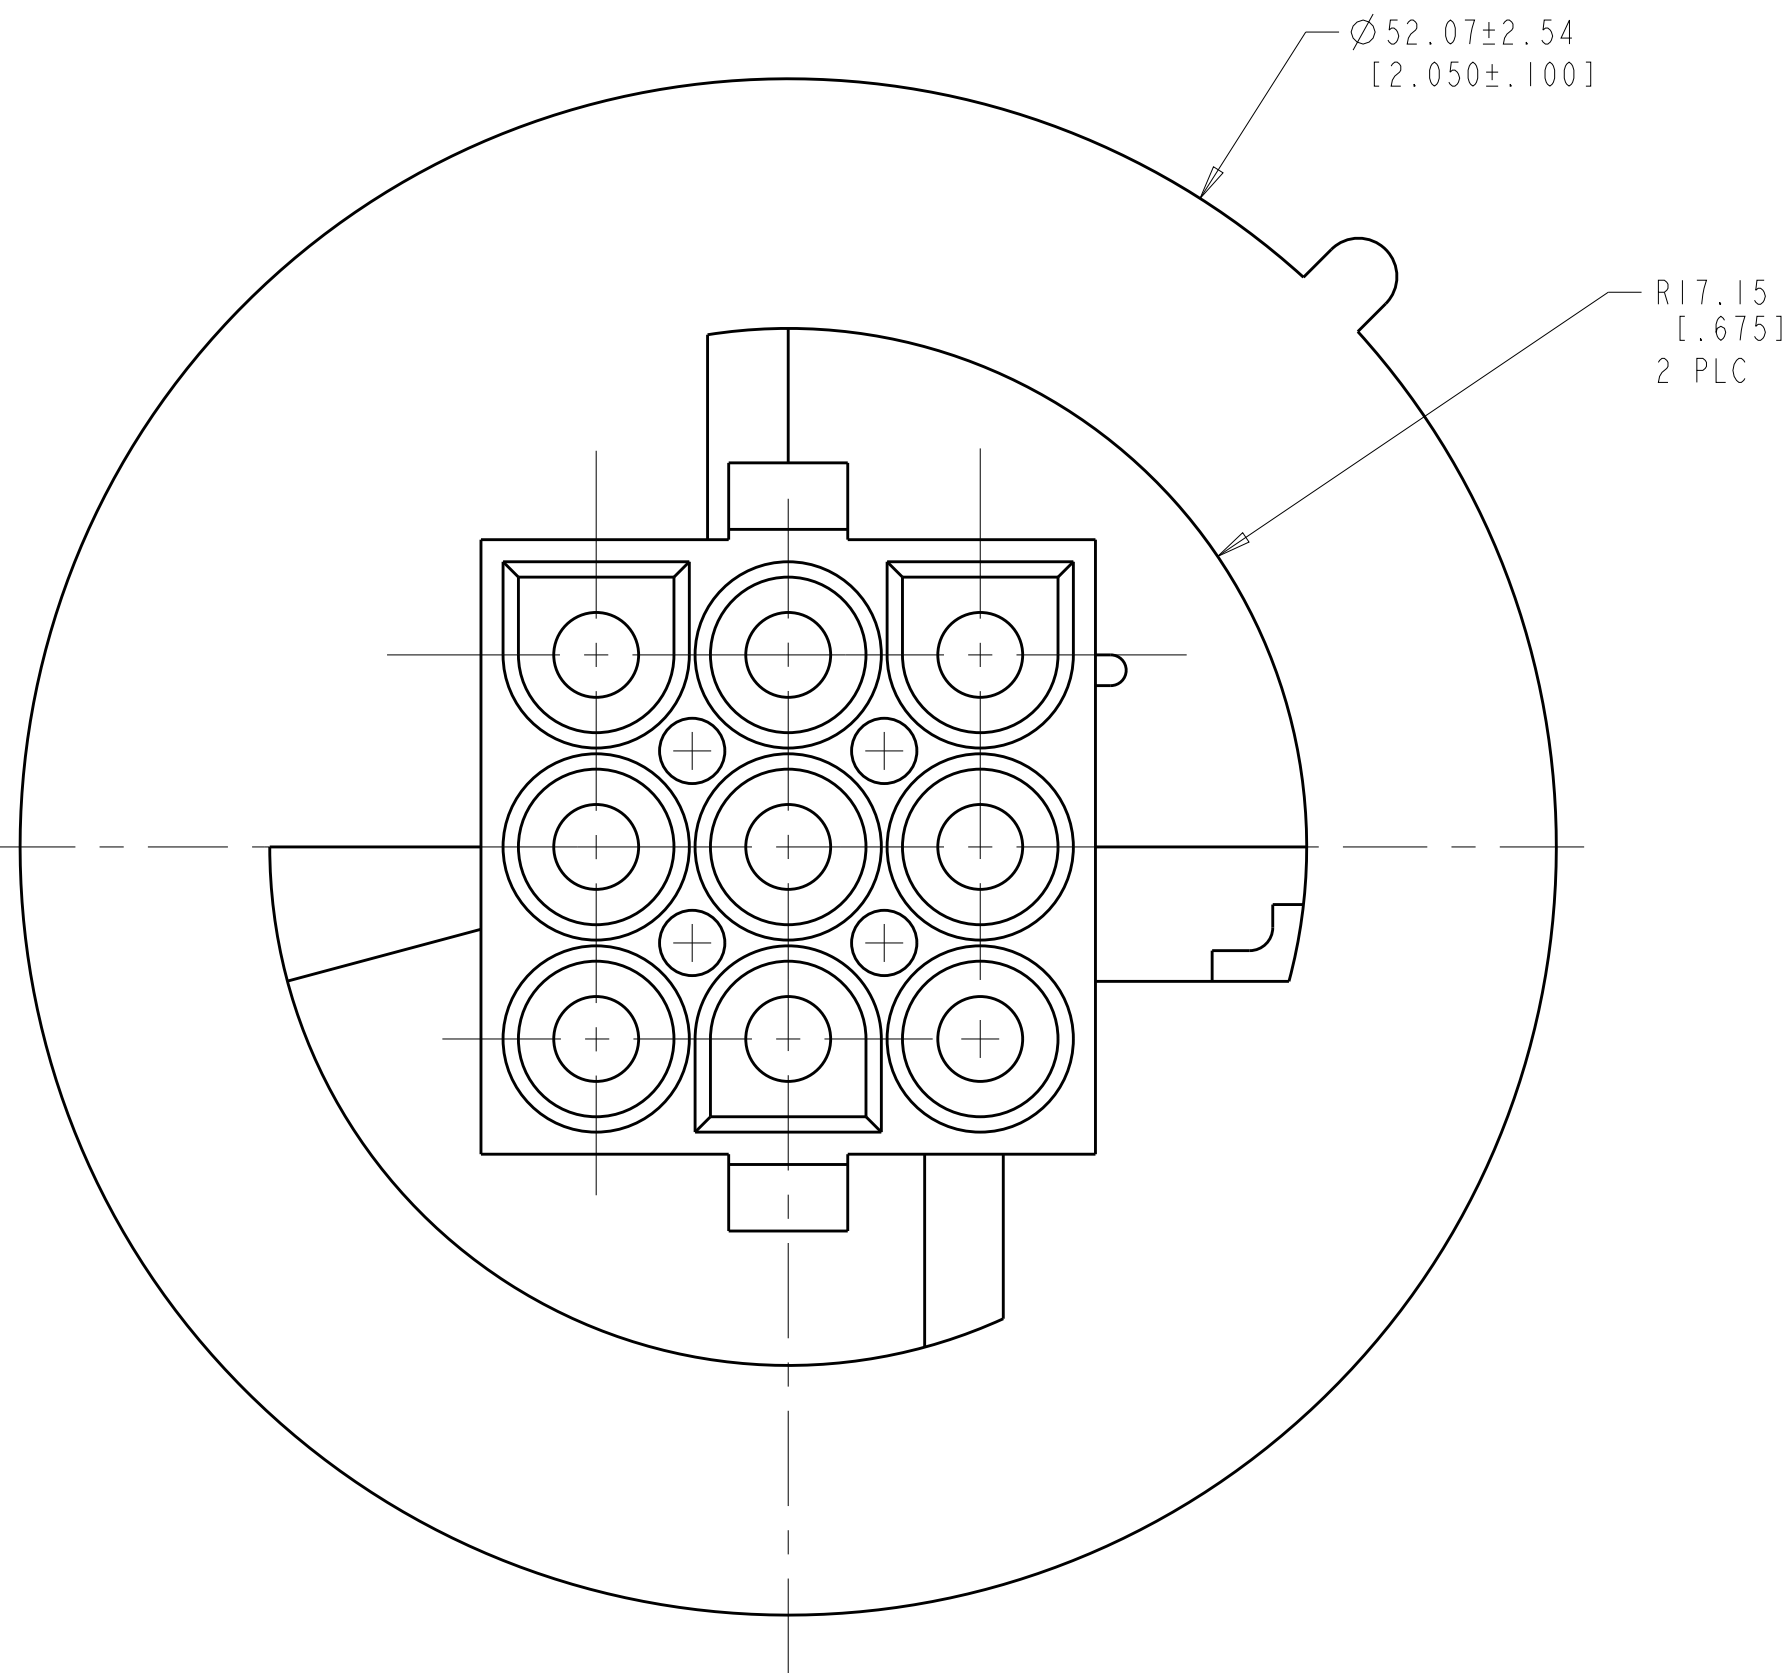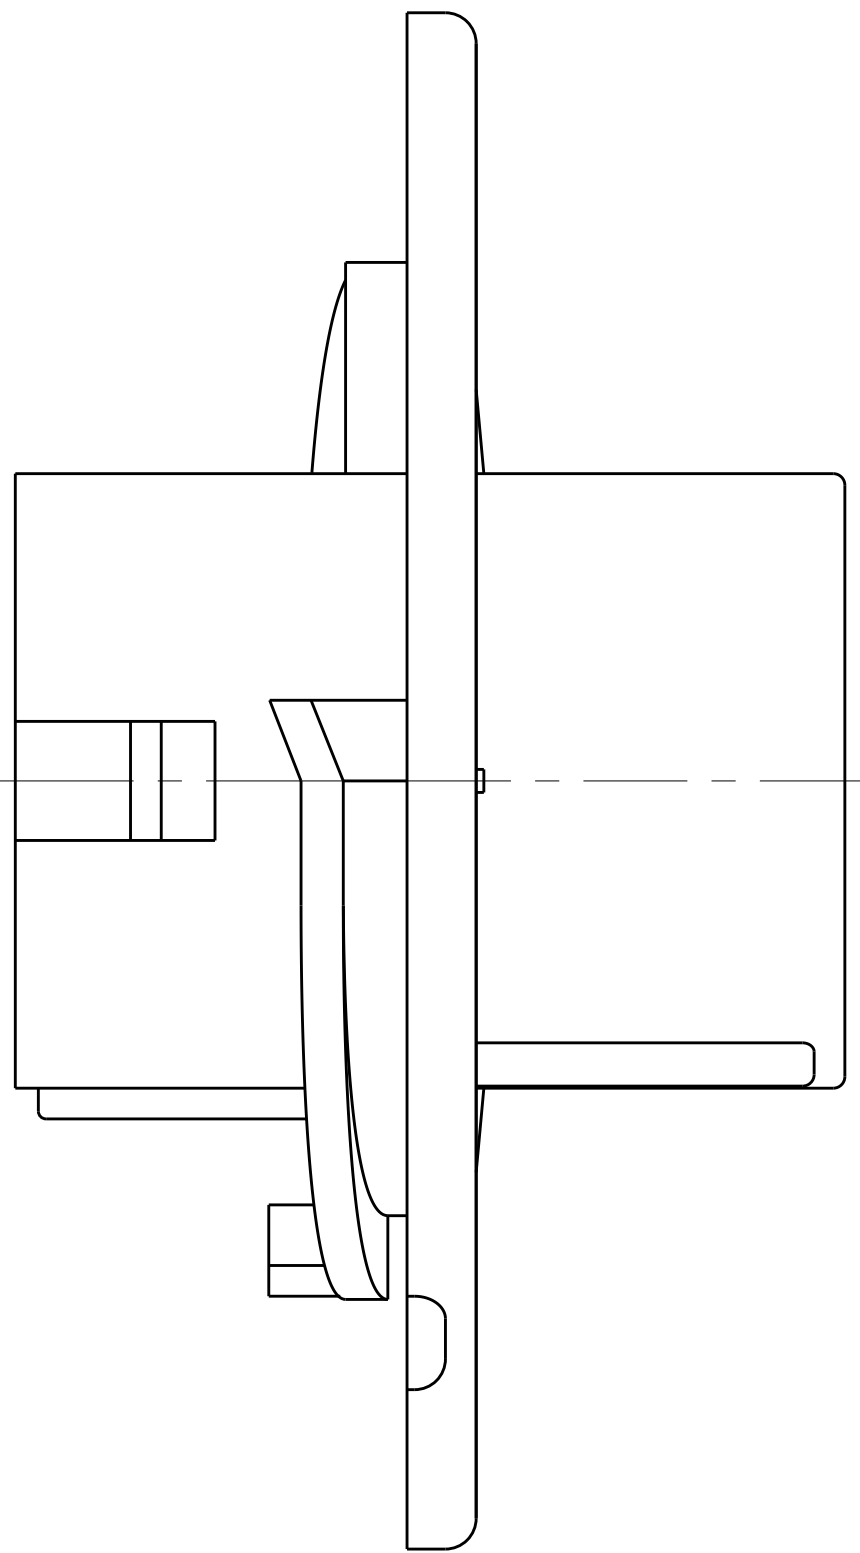


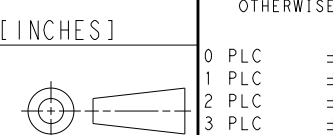
12.95±0.17
[.510±.007]

27.43±0.38
[1.080±.015]

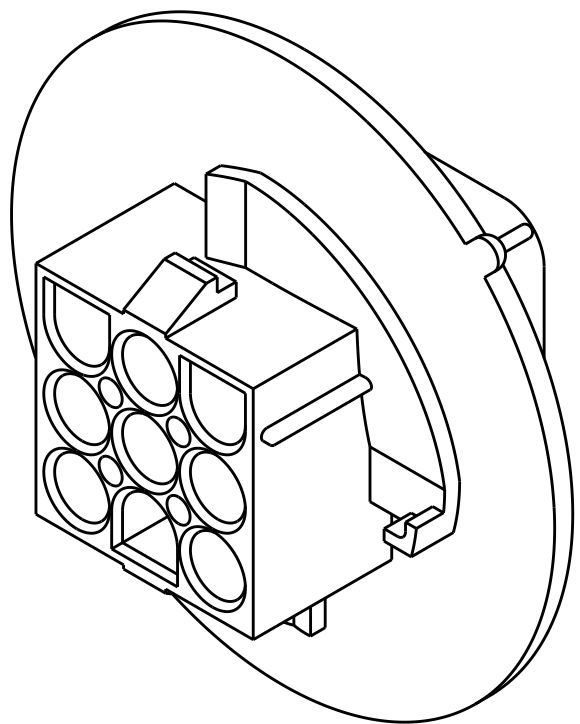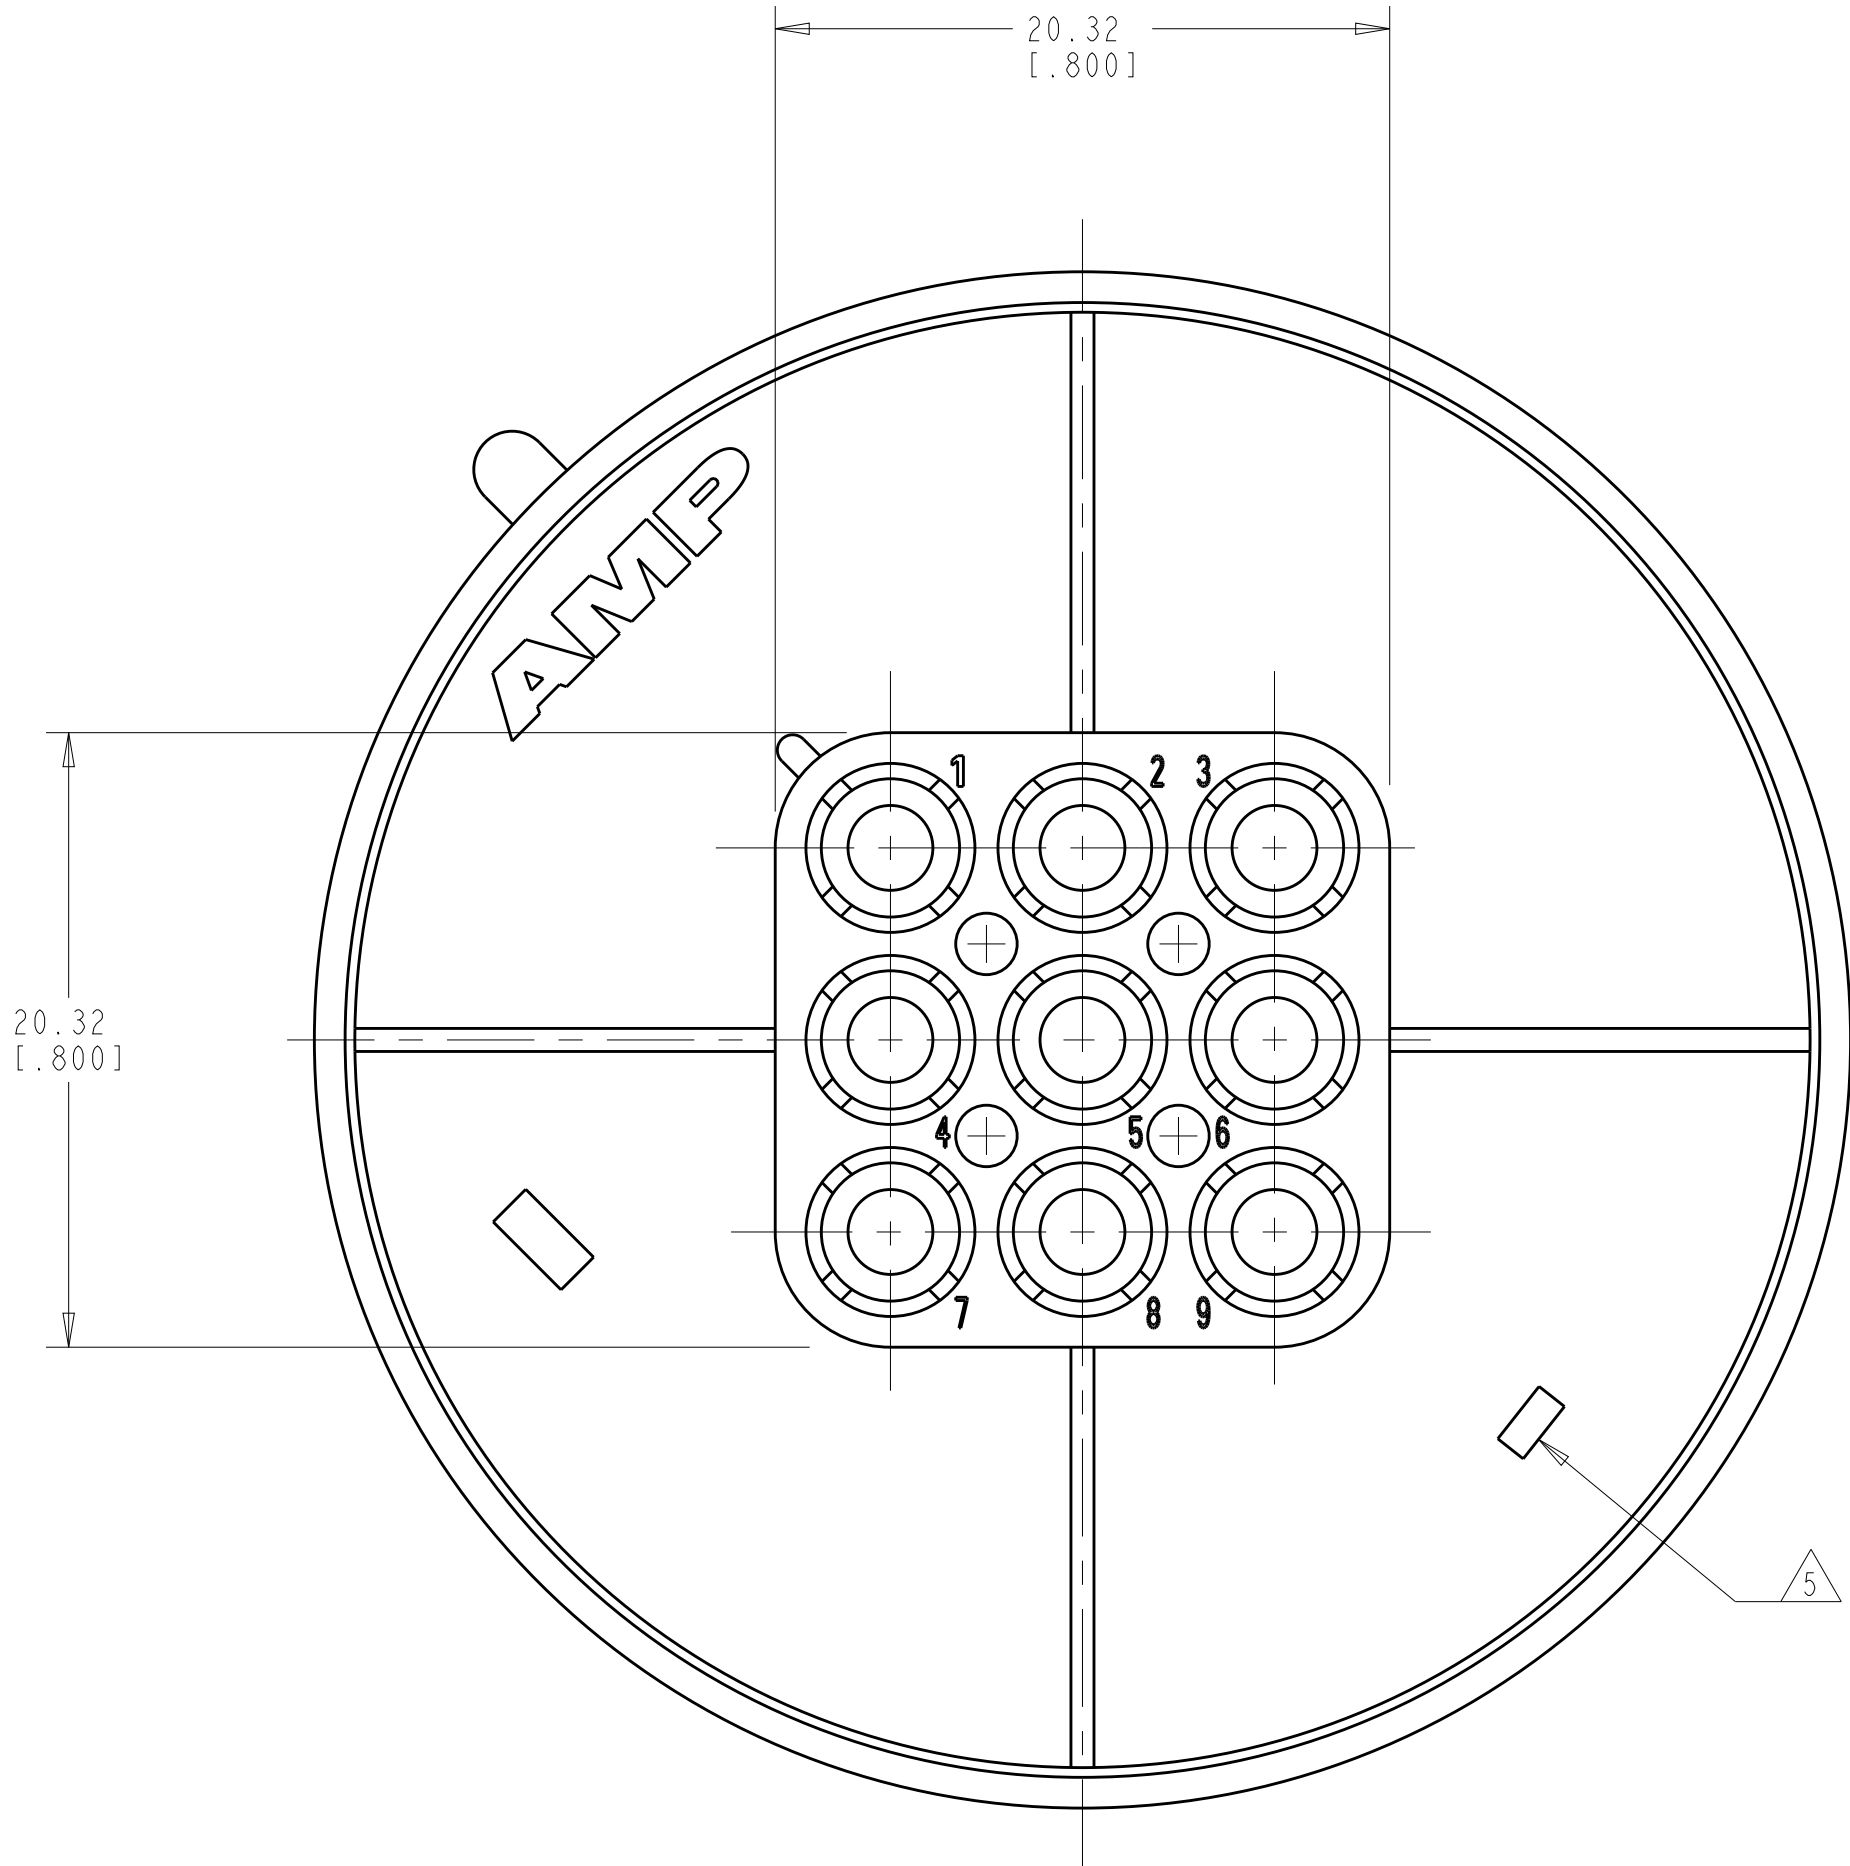

3-DIMENSIONAL MODEL
SCALE 2:1

BLACK	I-794761-9
GRAY	I-794761-8
BLUE	I-794761-6
GREEN	I-794761-5
YELLOW	I-794761-4
ORANGE	I-794761-3
RED	I-794761-2
BROWN	I-794761-1
NATURAL	794761-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 20-JUNE-2000	 TE Connectivity						
		CHK K. COBLE 20-JUNE-2000							
DIMENSIONS: mm[INCHES]		APVD K. COBLE 20-JUNE-2000	NAME						
		PRODUCT SPEC	CAP. 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL						
		APPLICATION SPEC							
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
		WEIGHT	A1 00779 C=794761						
		CUSTOMER DRAWING							
		SCALE	4:1	SHEET	1	OF	1	REV	F