

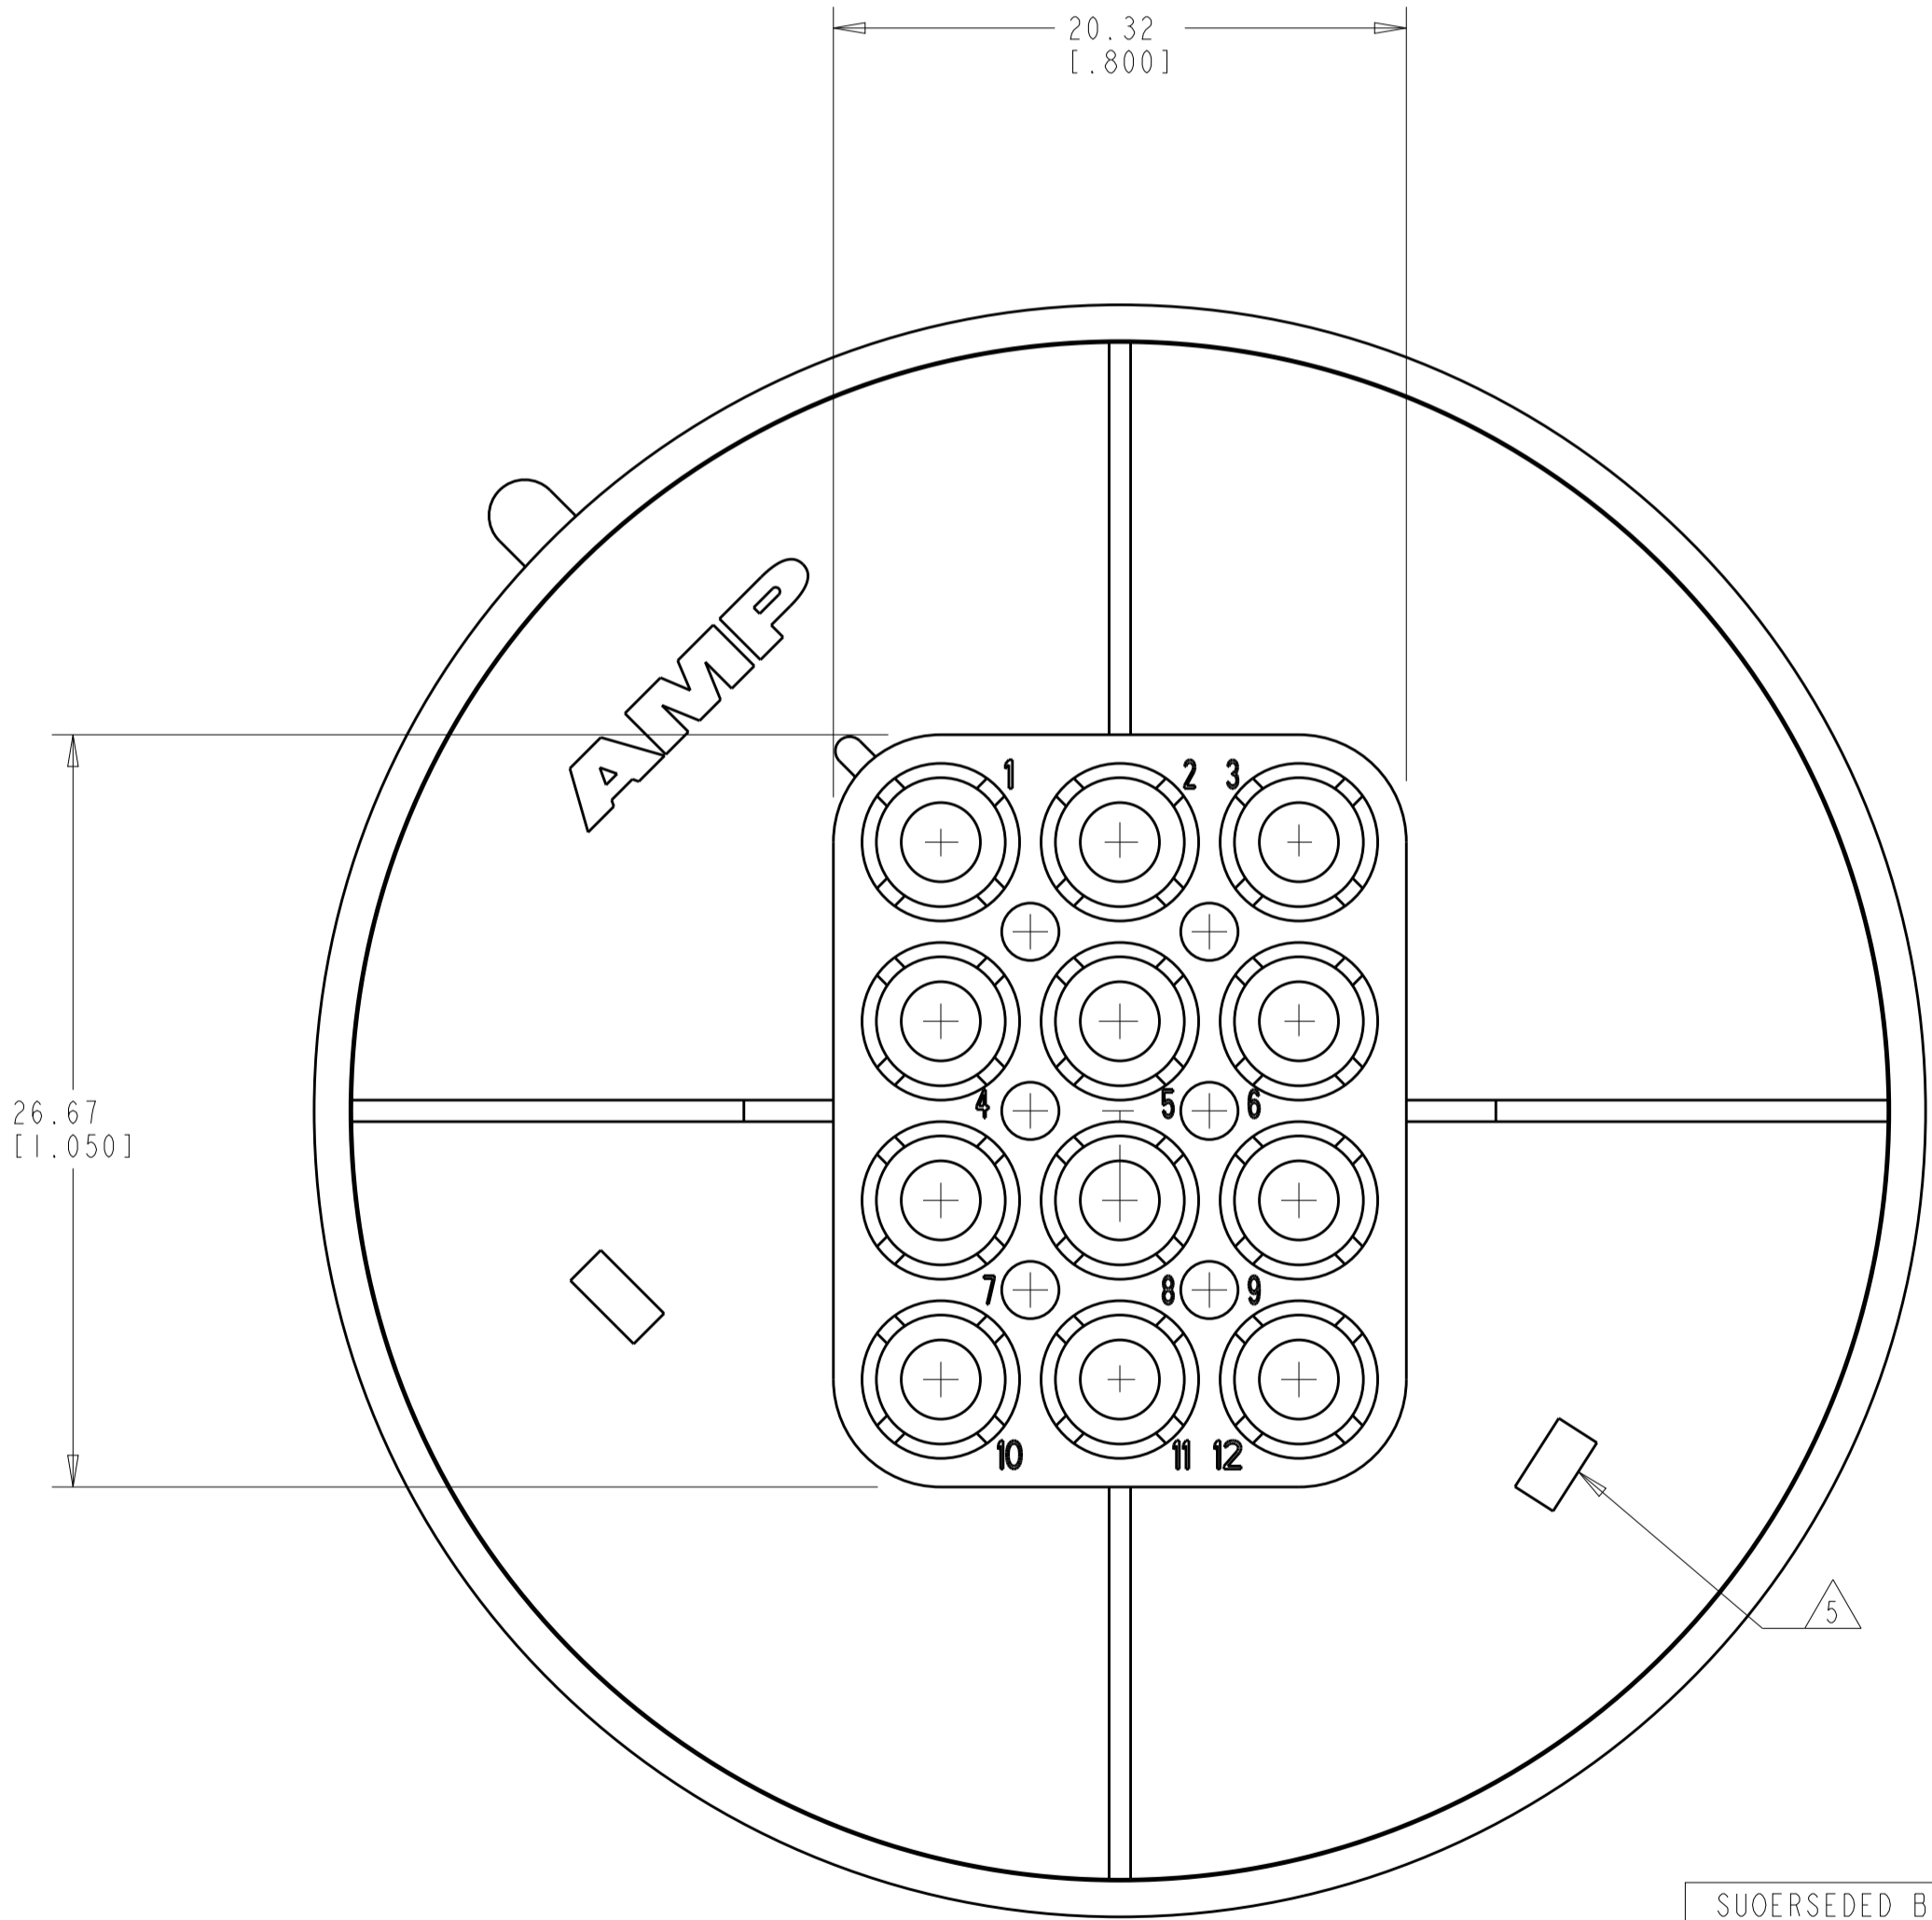
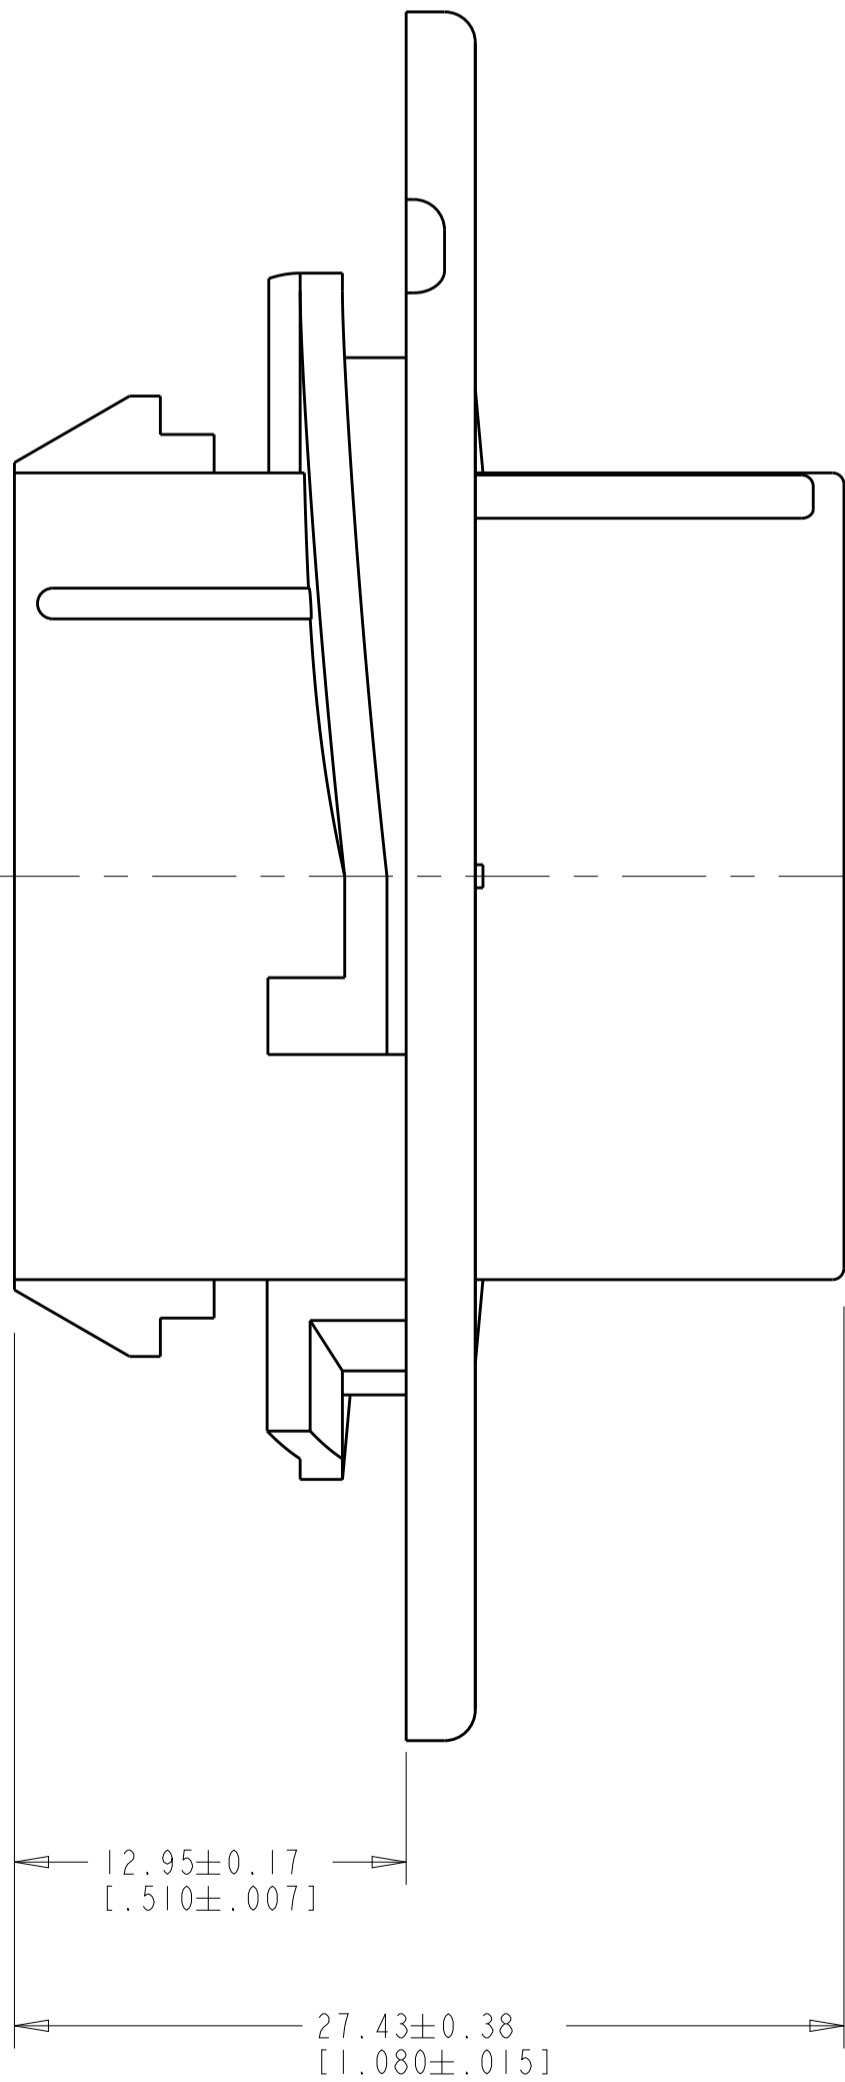
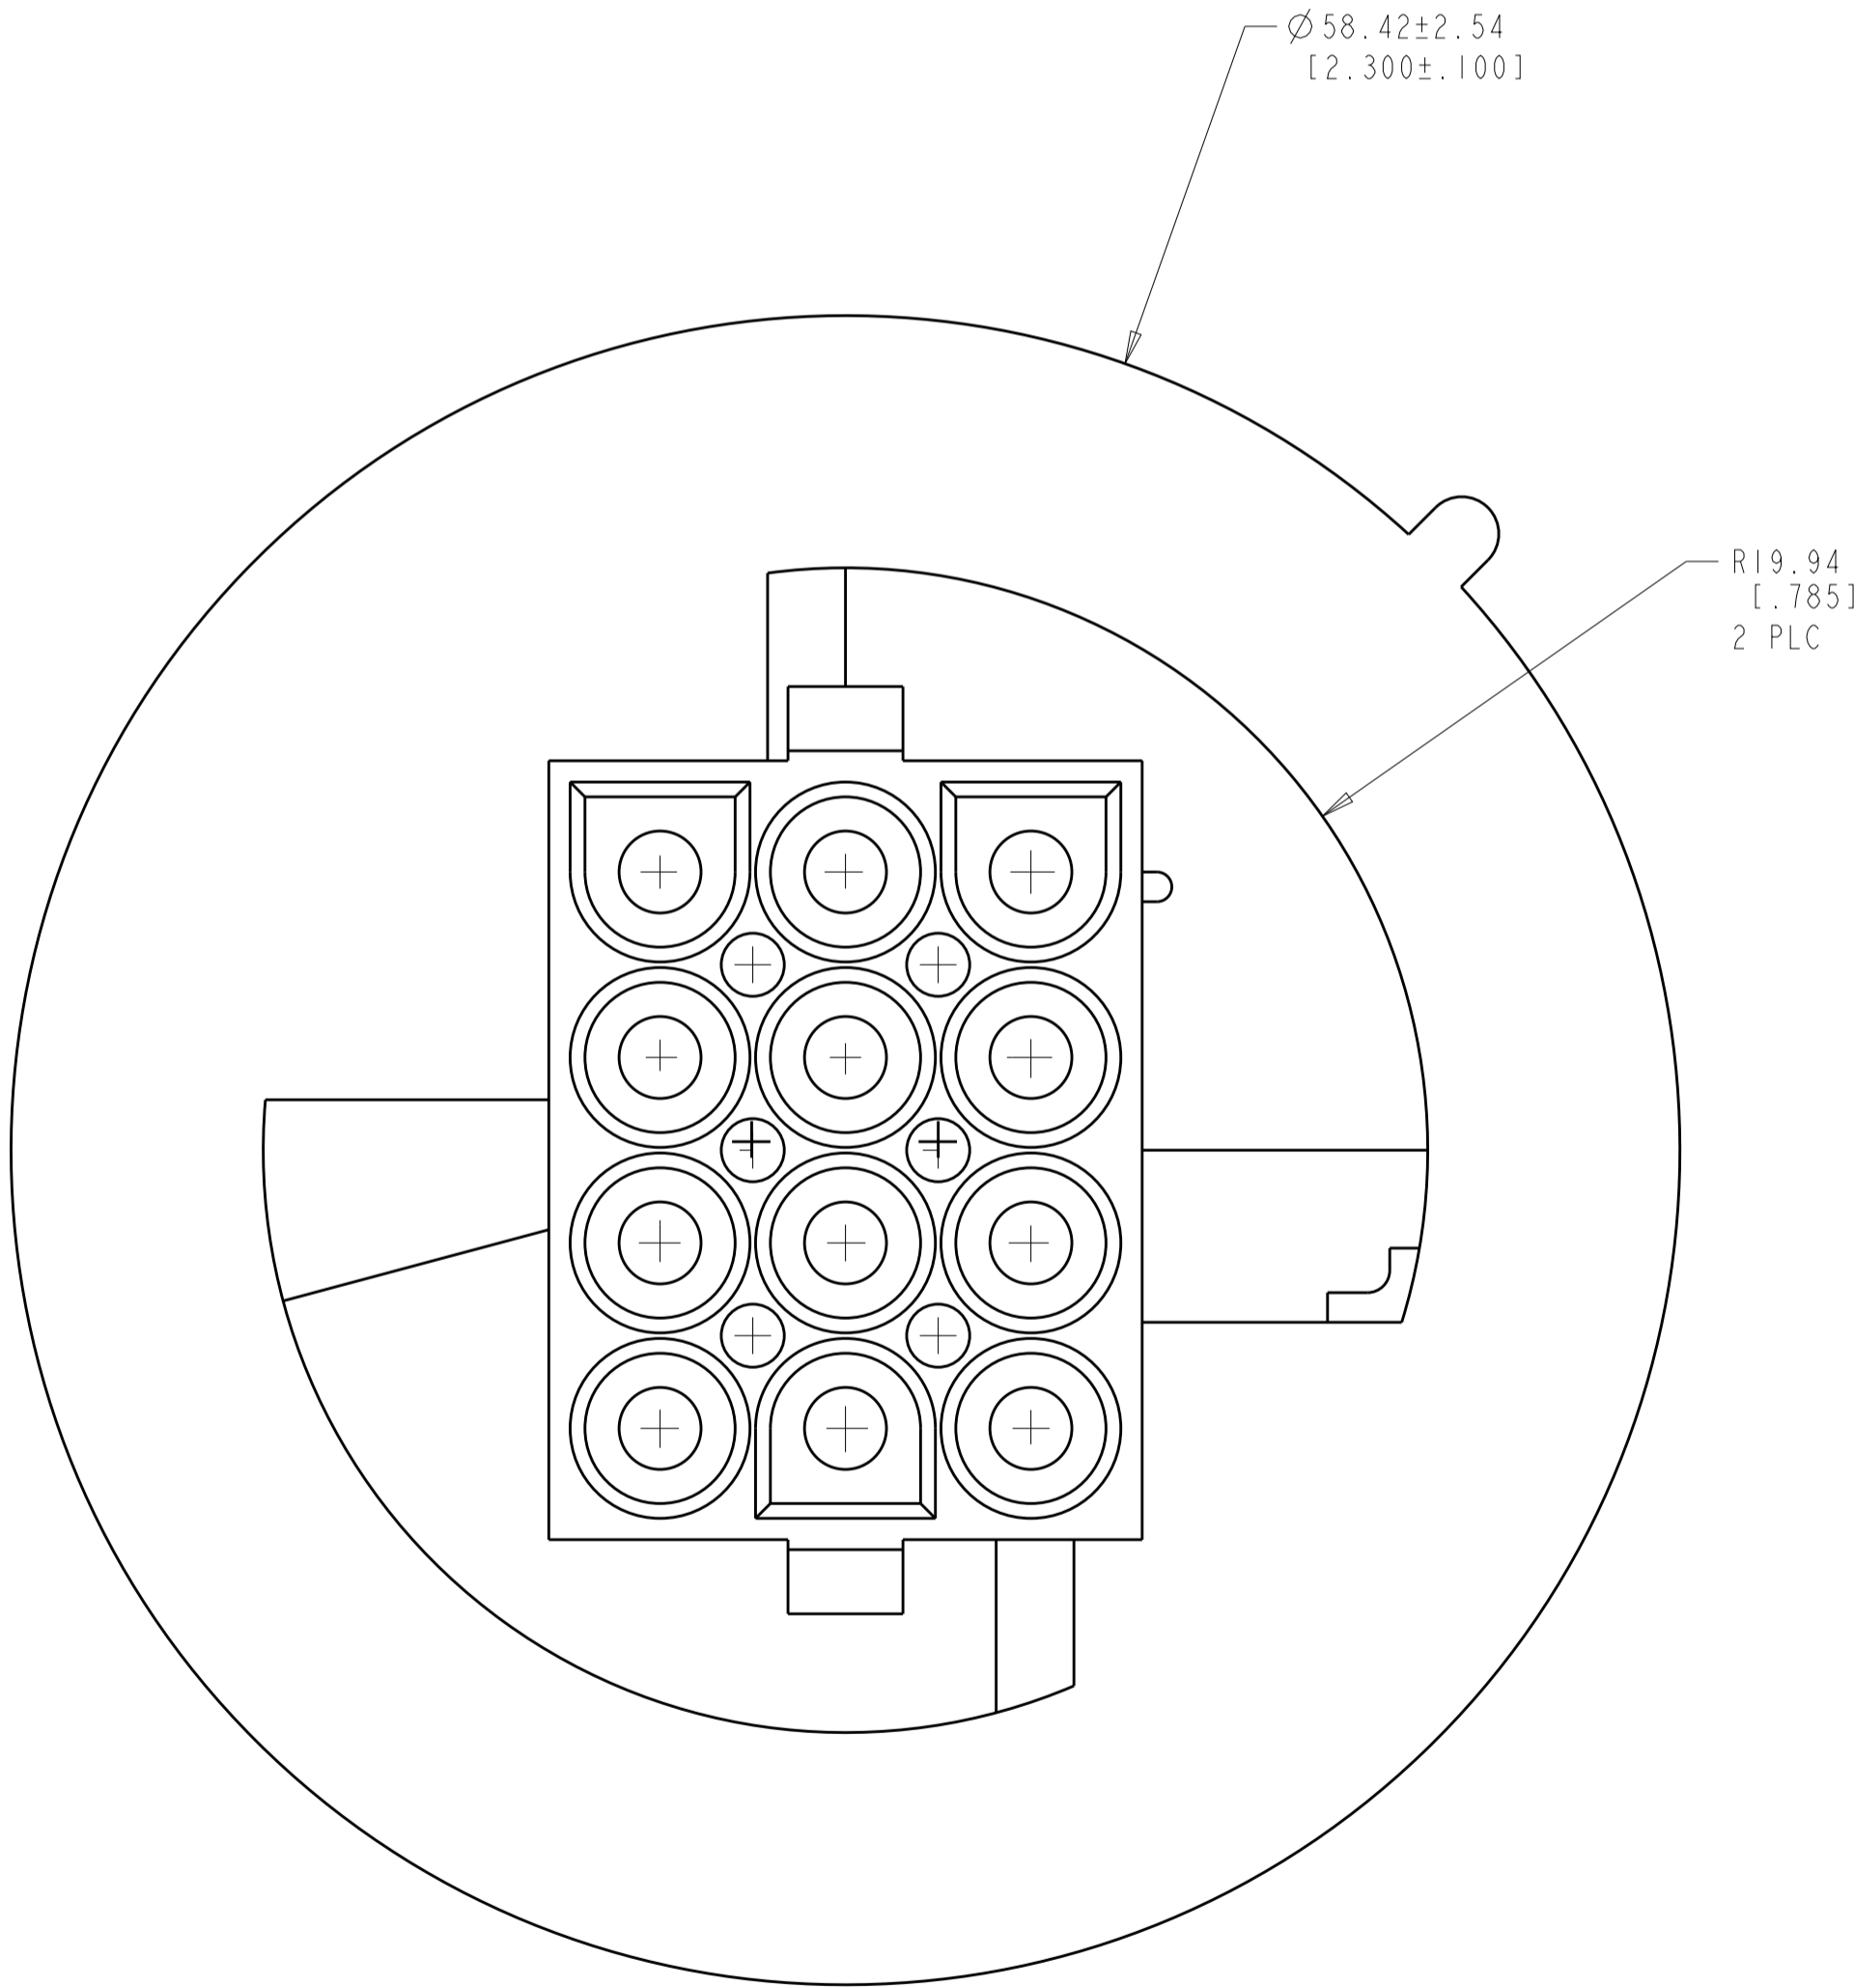


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECR-17-015775	03NOV2017	BDA	KR

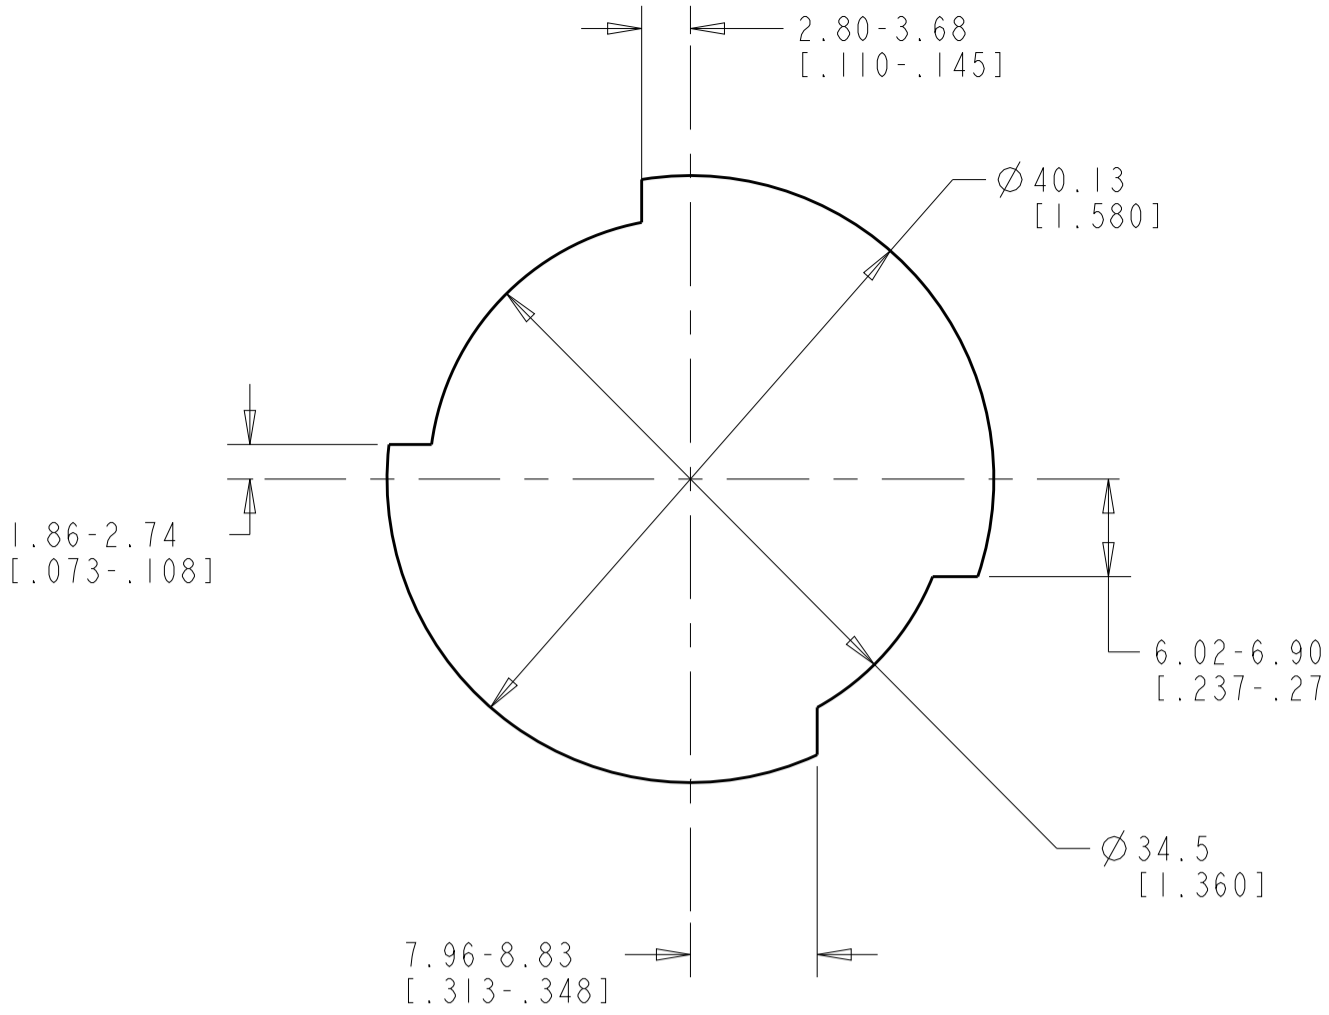

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

5 UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

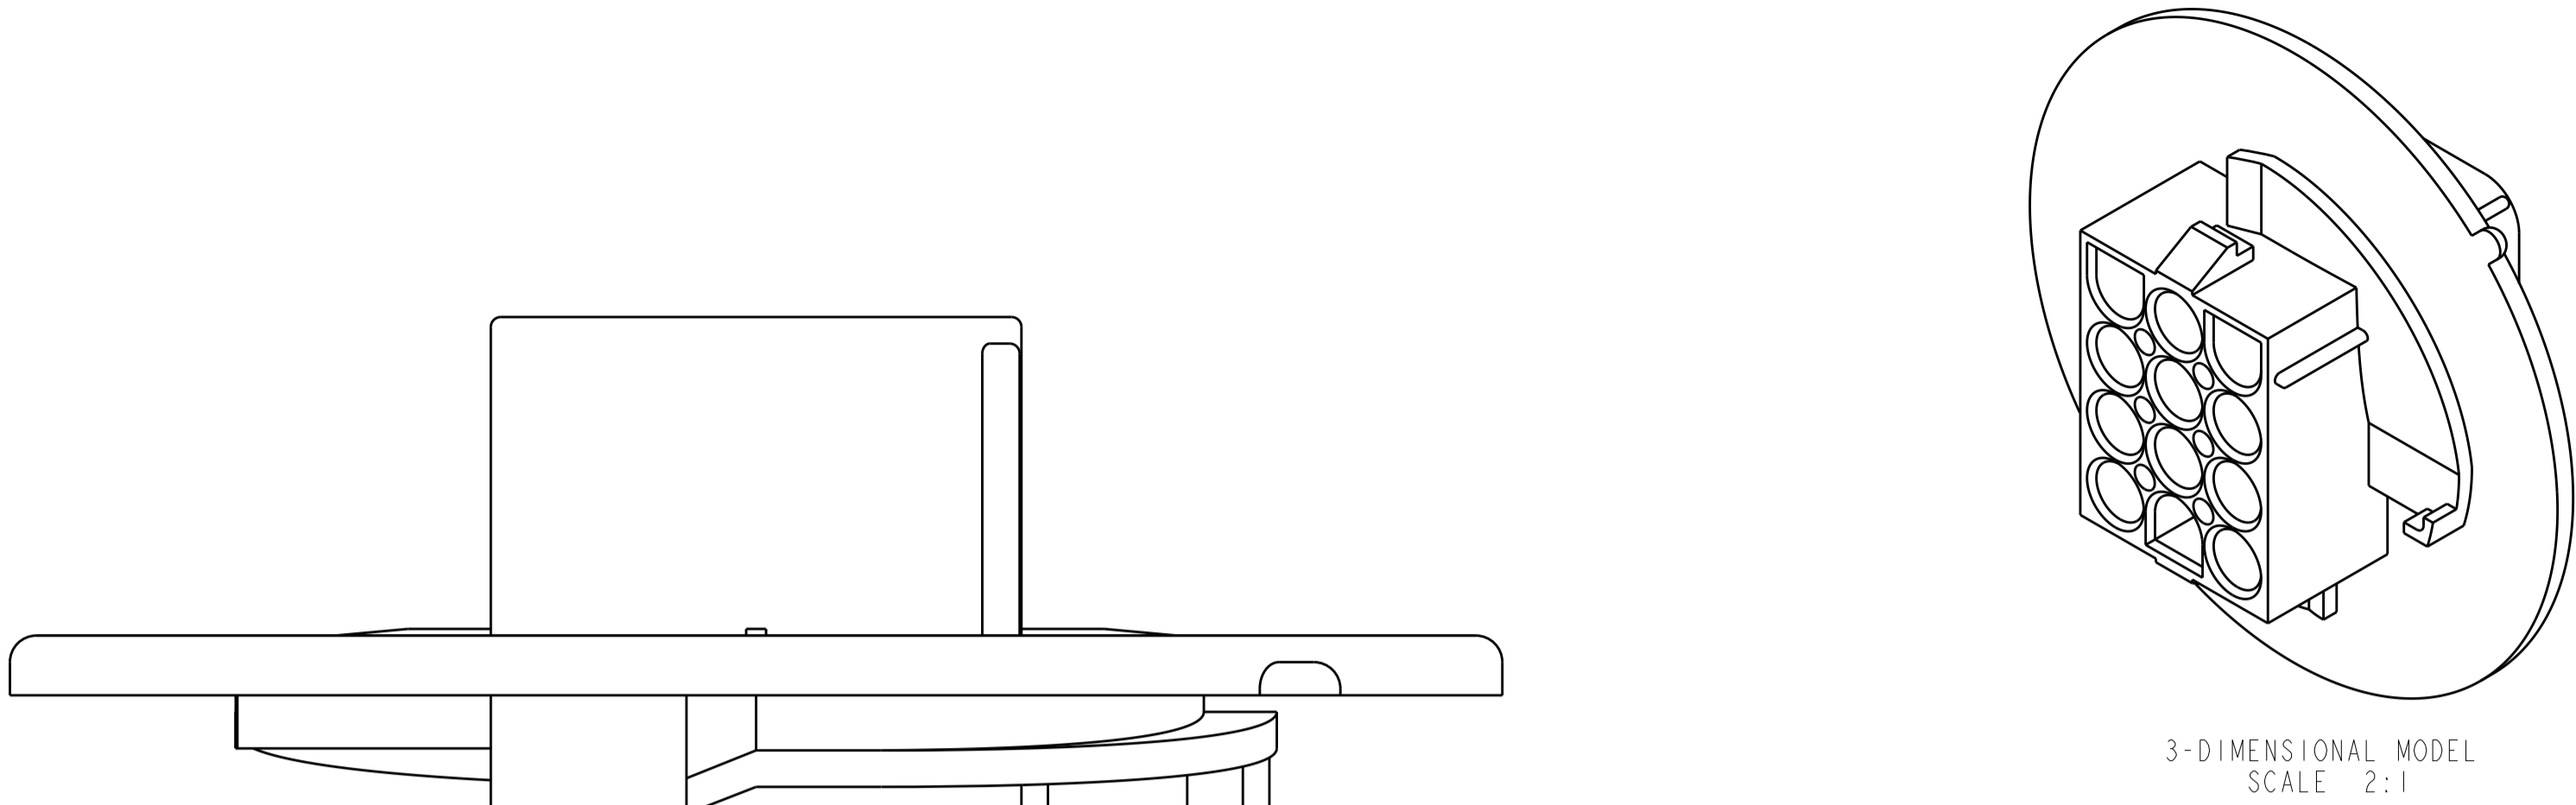

BLACK	1-794762-9
GRAY	1-794762-8
BLUE	1-794762-6
GREEN	1-794762-5
YELLOW	1-794762-4
ORANGE	1-794762-3
RED	1-794762-2
BROWN	1-794762-1
RED	794762-3
NATURAL	794762-1
COLOR	PART NUMBER

SUOERSEDED BY 794762-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 20-JUNE-2000	 TE Connectivity		
		CHK K. COBLE 20-JUNE-2000			
DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPROV K. COBLE 20-JUNE-2000	NAME	CAP. 12 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL	
	0 PLC ±	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	1 PLC ±	APPLICATION SPEC			
MATERIAL	2 PLC ±0.51(.020)	WEIGHT	A1	00779	C=794762
	3 PLC ±	CUSTOMER DRAWING			
	4 PLC ±				
	ANGLES ±0° 30'				
	FINISH			SCALE	4:1
				SHEET	1
				OF	1
				REV	H