


LOC DIST
— —

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).	22JUL2014	TJ	JK

NUMMER 829309
VERWENDET FÜR
WAR NR. E88-52544

POLZ. PRO REIHE	L±0.4	BESTELL-NR.
—	—	—
2	5.08	— 2
3	7.62	— 3
4	10.16	— 4
5	12.70	— 829 309 5
6	15.24	— 6
7	17.78	— 7
8	20.32	— 8
9	22.86	— 9
10	25.40	1 — 0
11	27.94	1 — 1
12	30.48	1 — 2
13	33.02	1 — 3
14	35.56	1 — 4
15	38.10	1 — 5
16	40.64	1 — 6
17	43.18	1 — 7
18	45.72	1 — 8
19	48.26	1 — 9
20	50.80	2 — 0
21	53.34	2 — 1
22	55.88	2 — 2
23	58.42	2 — 3
24	60.96	2 — 4
25	63.50	2 — 5
26	66.04	2 — 6
27	68.58	2 — 7
28	71.12	2 — 8
29	73.66	2 — 9
30	76.20	3 — 0
31	78.74	3 — 1
32	81.28	3 — 2
33	83.82	3 — 3
34	86.36	3 — 4
35	88.90	3 — 5
36	91.44	3 — 6
37	93.98	3 — 7
38	96.52	3 — 8
39	99.06	3 — 9
40	101.60	4 — 0
41	104.14	4 — 1
42	106.68	4 — 2
43	109.22	4 — 3
44	111.76	4 — 4
45	114.30	4 — 5
46	116.84	4 — 6
47	119.38	4 — 7
48	121.92	4 — 8
49	124.46	4 — 9
50	127.00	5 — 829 309 0

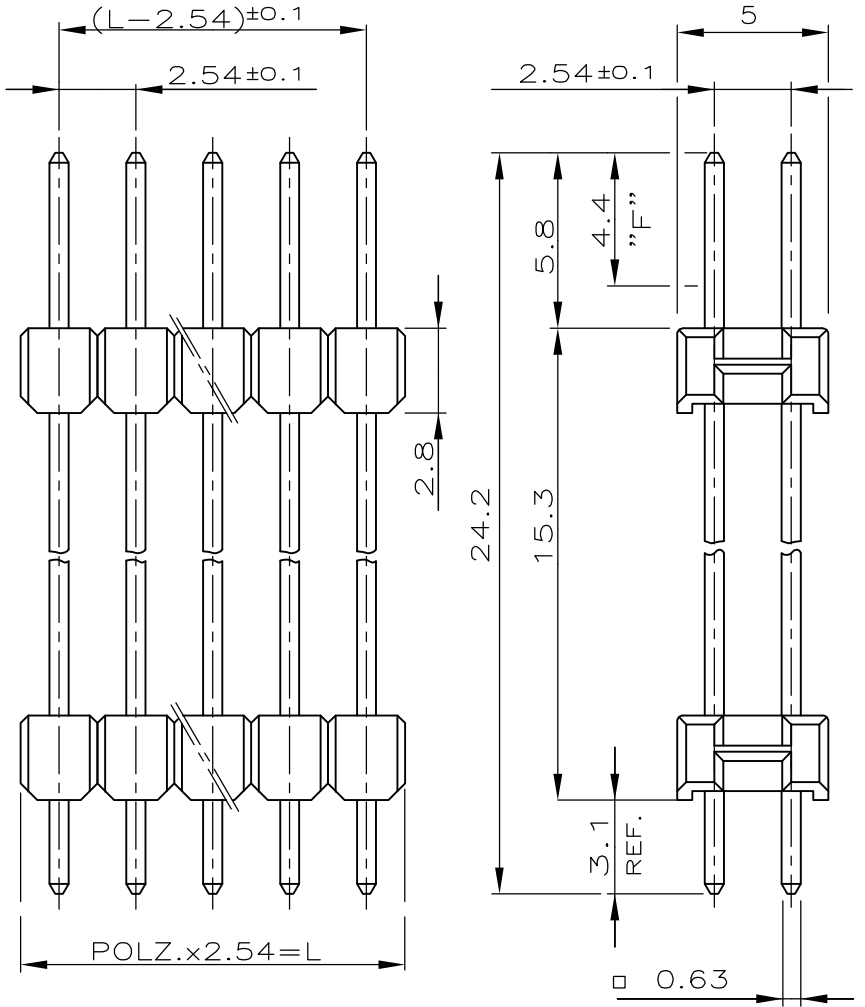

- 1
- 2
- 3

STECKSEITE: IM BEREICH "F" 0.7µm PdNi+0.1µm GOLD FLASH ÜBER 1.27µm NICKEL
LÖTSEITE: MIN. 2.5µm ZINN ÜBER 1.27µm NICKEL

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	1
STIFTGEHÄUSE	PBT	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90..

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION

DIMENSIONS: mm	DWN	17.07.89	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	G.Holous				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	M.Schaarschmidt	TE Connectivity			
	PRODUCT SPEC	—				
0 PLC ±0.2 mm		108-18012	NAME			
1 PLC ± -			SPEZ. AMPMODU II STIFTLISTE			
2 PLC ± -			ZWEIREIHIG			
3 PLC ± -			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC ± -			A4	00779	C-829309	—
ANGLES ± -			WEIGHT			
			CUSTOMER DRAWING			
			SCALE	SHEET	REV	
			4:1	1 OF 1	E	