


SEE NOTE # 1

(A) BOTH HANDLE TIPS PAINTED WITH YELLOW LACQUER

5" MAX CLOSED BUT NOT UNDER PRESSURE
10" MAX WHEN OPENED

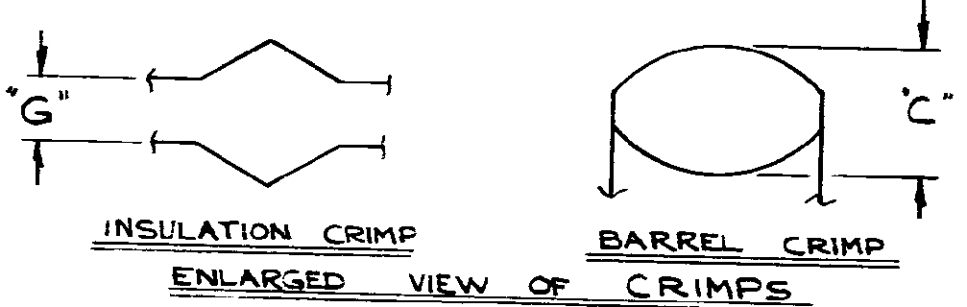

INSULATION CRIMP
BARREL CRIMP
ENLARGED VIEW OF CRIMPS

"G"	
GO	NO GO
.035	.055

"C"	
GO	NO GO
.063 DIA.	.069 DIA.

PINS IN POSITION NO. 1

- ORDER REPAIR KIT 125218-4.
- GAGE DIMENSIONS APPLY WHEN TOOL IS BOTTOMED BUT NOT UNDER PRESSURE.
- FOR REPLACEMENT OF PARTS OTHER THAN SNAP RINGS OR PINS, TOOL SHOULD BE RETURNED TO OUR FACTORY TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.
- FOR TOOL USAGE, SEE INSTRUCTION SHEET NO. 1809.

QTY	SIZE	NUMBER	NAME	REMARKS	ITEM NO
1	A	39364	SPRING-HANDLE		8
1	A	300449	PIN-RETAINING		7
2	A	300387	RING-RETAINING		6
2	A	300432	PIN-RETAINING		5
4	-	21045-3	RING-RETAINING		4
2	A	39207	PIN-ADJUSTMENT		3
1	B	125083-2	LOCATOR		2
1	A	3-21016-7	SCREW (#8-32 X 3/8 LGTH.)		1

REV	DESCRIPTION	DATE	CHK	DR
A-2	LOC. M WAS A	10/19/61	RP	RP
A-1	ADDED OVERALL DIMS.	11/2/61	BC	DD
A	ADDED 39364, NOTE 3-21016-7 WAS 39227 & RELOCATED LOC. ITEM # 2	4/1/68	DD	DD

QTY	DESCRIPTION
1	90026

©1961 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

AMP INCORPORATED HARRISBURG, PENNA.

AMP

MATERIAL - STEEL
FINISH - BLACK OXIDE
WEIGHT - 1 LBS, 3 OZ.
WIRE - RANGE - INSULATION
TOLERANCE EXCEPT AS NOTED
SCALE
LOC M
NO B
REV A-2

NAME: DOUBLE ACTION HAND TOOL

DATE: 10/19/61
CHK: N. J. ...
APP: C. ...

DIMENSIONS IN INCHES DO NOT SCALE PRINT