


| REVISIONS | | | DATE | APPROVED |
|-----------|-----|----------------------|---------|--------------|
| ZONE | LTR | DESCRIPTION | 1/24/80 | <i>Blair</i> |
| | C | CHANGE PER DCO 01075 | | |

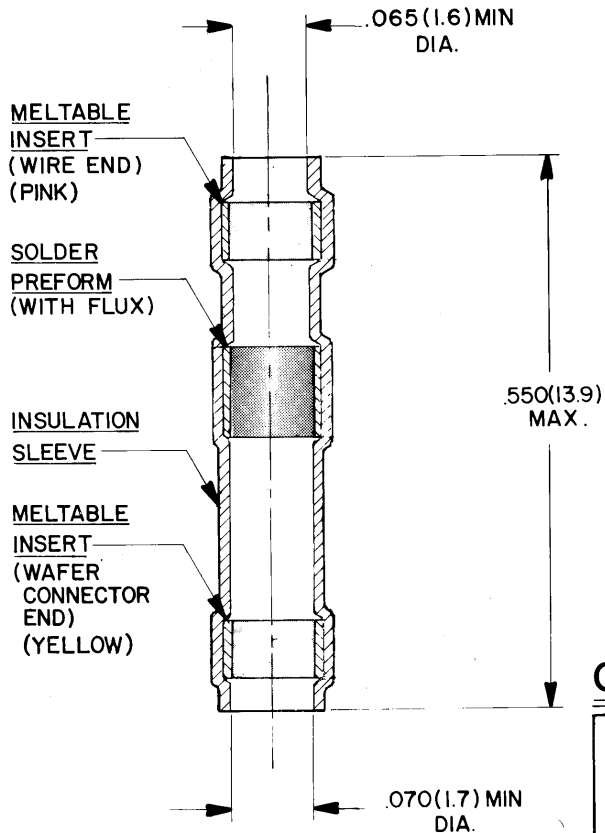

NOTES :

1. MATERIALS

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAUGE TIN PLATED OR SILVER PLATED CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

| | | | | | |
|---|----------|-------------------|----------|--|--------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE: .XXX: ± (M.M.) .XX: ± (M.M.) Δ: ± | DRAWN | SA. LOPEZ | 5-7-79 | Raychem <small>RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025</small> | |
| | CHECKED | <i>Ph</i> | | | |
| | APPROVED | <i>Blair</i> | 5-7-79 | TITLE | |
| | APPROVED | <i>E. Steiner</i> | 5-7-79 | SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING 150°C(Sb5)MTC100 SERIES | |
| | APPROVED | <i>Steiner</i> | 5-7-79 | | |
| | PROJECT | 6448-7055 | SIZE | CODE IDENT | DWG. NO. |
| | | | B | NO. 06090 | CTA-0025 |
| | | | | WEIGHT | SHEET 1 OF 1 |

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING