


# CUSTOMER DRAWING

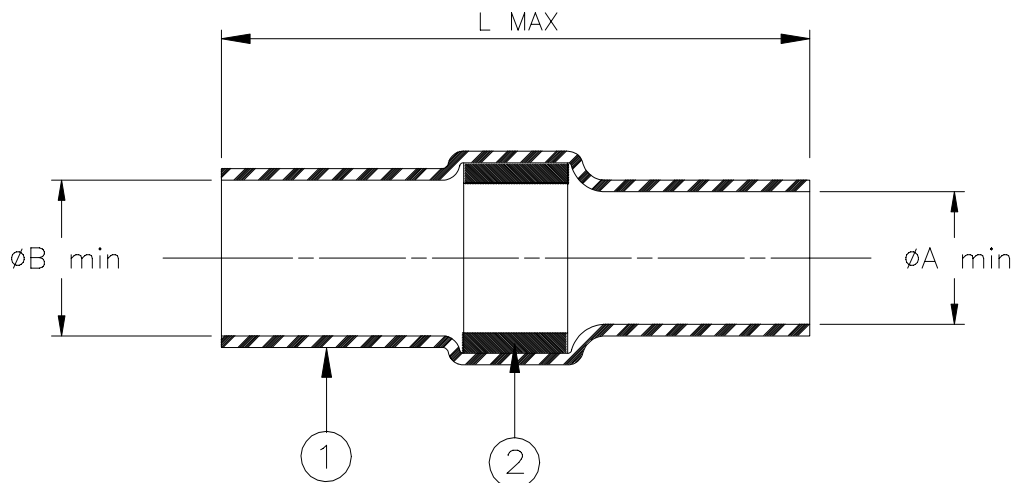


Product Name	Product Dimensions		
	L MAX	A min	B min
D-110-41	27.6 (1.090)	2.7 (0.105)	3.2 (0.125)

## MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.
2. SOLDER PREFORM WITH FLUX:  
Solder: Sn63 Pb37 per ANSI J-STD-006.  
Flux: ROL1 per ANSI-J-STD-004.

## NOTES

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly.  
TEMPERATURE RATING: -55C to +150C.

 <b>Tyco Electronics</b>			Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE:  SOLDERSLEEVE DEVICE			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			Raychem Devices		DOCUMENT NO.:  D-110-41			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			REV:  A		DATE:  26-Mar-08	
DRAWN BY: PTALLY	CAGE CODE: 06090				REPLACES: D980623	ECO NUMBER: 08-007722	SCALE:  NTS	

© 2008 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.