


REV. 1 7/9/92

| | |
|-----------------|----------------|
| COIL: @ 25°C | |
| RESISTANCE | 600 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.0 VDC |
| MUST RELEASE | 1.5 VDC |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 100 g's 6 ± 1 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: _____

CUSTOMER DATA SHEET

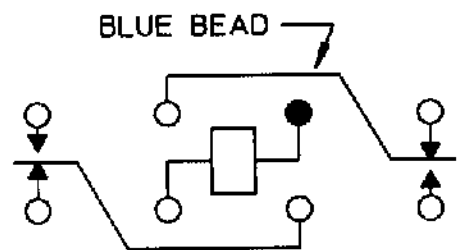

CONTACT RATING: 5 AMPS 30 VDC
 RESISTIVE 1 AMP 30 VDC INDUCTIVE
 100,000 OPERATIONS

DR. R.B. 7/9/92 CK: 7/9/92



CUST. HI-G
 CUST. NO. 28N-2A-126

TYPE FW5A RELAY

FW5A1201S04