

**COIL:**

RESISTANCE 1620 OHMS  $\pm$  10%

NOMINAL VOLTAGE 22.5-44.0 VDC

MUST OPERATE 14.3 VDC

MUST RELEASE 8.6 VDC MAX 1.4 VDC MIN

**ENVIRONMENT:**

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

**NOTES:** OPERATE TIME 6 MS MAX

RELEASE TIME 5 MS MAX

CONTACT BOUNCE 2 MS MAX

**CUSTOMER DATA SHEET**

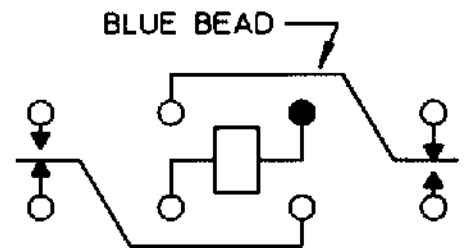

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/4/92 CK. 6/18/92

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. GENICOM

CUST. NO. 3SAV5014L2

TYPE "HMS" RELAY

**HMS1206S01**