



Quality Products. Service Excellence.

Step-Up (115VAC to 230VAC) 176 Series


Plug-In



Features

- Single winding, does not provide isolation, for use where equipment is already isolated and only voltage change is required.
- World wide applications, 50 or 60 Hz. operation, step up (115VAC to 230VAC).
- Input is circuit breaker protected.
- Hi-pot tested to 2 KV RMS
- Input is a standard 3-wire, grounded plug (can also be used with **adaptors** for proper grounding).
- Input is connected to a 5 foot cord & standard grounded North American plug (NEMA 5-15P)
- Output - Due to U.L changes in 2007 - NEW production with the European (Shuko) parts would no longer be U.L. listed. Therefore, we replaced this output receptacle with a one foot long "pig tail" cord with a standard North American 3-wire, 250V receptacle (NEMA 6-15R) for any production after the first part of 2008.
- North American Mark of Safety - C UL & UL listed (File #E211544).
- Indoor use only.
- Remember - These units do NOT convert line frequency

Gallery

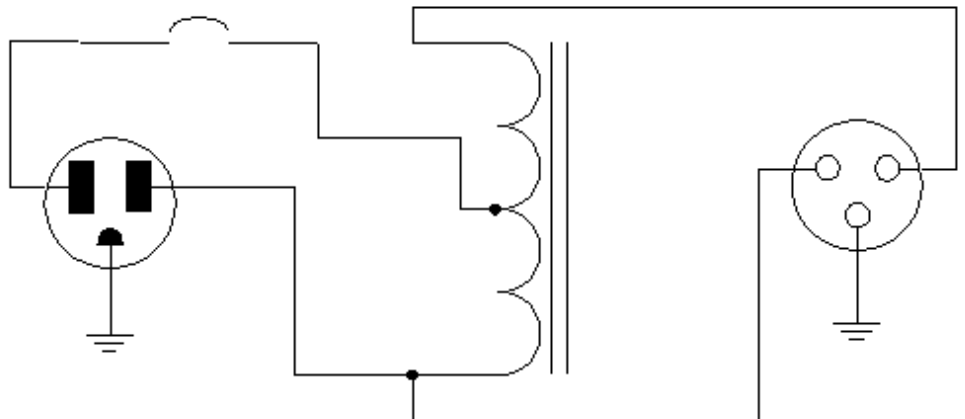

| Part No. | Capacity | Overall Dimensions | Wt. Lbs. |
|----------|----------|--------------------|----------|
|----------|----------|--------------------|----------|

Step-Up (115VAC to 230VAC) (176 Series) - Hammond Mfg.

| Part No. | Capacity | A | Overall Dimensions | | | | E | Wt. Lbs. |
|----------|----------|------|--------------------|------|------|------|------|----------|
| | VA | A | B | C | D | E | | |
| 176A | 120 | 3.16 | 4.25 | 3.81 | 2.50 | 2.94 | 3.5 | |
| 176B | 200 | 3.16 | 4.50 | 3.81 | 2.50 | 3.19 | 4.5 | |
| 176C | 300 | 3.16 | 5.00 | 3.81 | 2.50 | 3.69 | 6 | |
| 176D | 500 | 3.80 | 6.00 | 4.68 | 3.00 | 4.38 | 10 | |
| 176E | 750 | 3.80 | 7.06 | 4.68 | 3.00 | 5.38 | 14 | |
| 176F | 1000 | 3.80 | 7.06 | 4.68 | 3.00 | 5.38 | 14.5 | |
| 176G | 1500 | 4.40 | 6.63 | 5.39 | 3.50 | 6.09 | 22 | |

Data subject to change without notice

© 2018. Hammond Manufacturing Ltd. All rights reserved.