

"High Frequency Ceramic Solutions"

2.4 GHz Low Pass Filter

P/N 2450LP14A100

Detail Specification: 06/23/03

Page 1 of 2

General Specifications

Part Number	2450LP14A100
Frequency (MHz)	2400 - 2500
Insertion Loss	0.50 dB max.
Return Loss	14 dB min.
Attenuation (min.)	25 dB @ 2 x fo
Attenuation (min.)	18 dB @ 3 x fo
Input Power	3 Watts max.



Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	4,000

Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

Mechanical Dimensions

	In	mm
L	0.063 \pm 0.004	1.60 \pm 0.10
W	0.031 \pm 0.004	0.80 \pm 0.10
T	0.024 \pm 0.004	0.60 \pm 0.10
a	0.008 \pm 0.004	0.20 \pm 0.10
b	0.008 +.004/-0.006	0.20 +0.1/-0.15
c	0.006 \pm 0.004	0.15 \pm 0.10
g	0.012 \pm 0.004	0.30 \pm 0.10
p	0.020 \pm 0.002	0.50 \pm 0.05

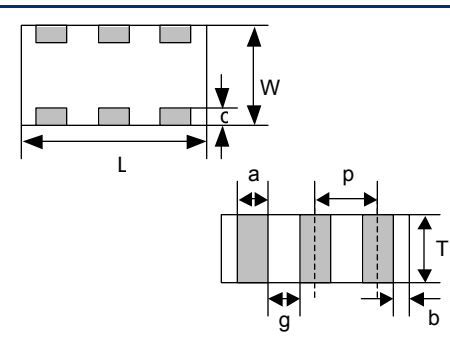


Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

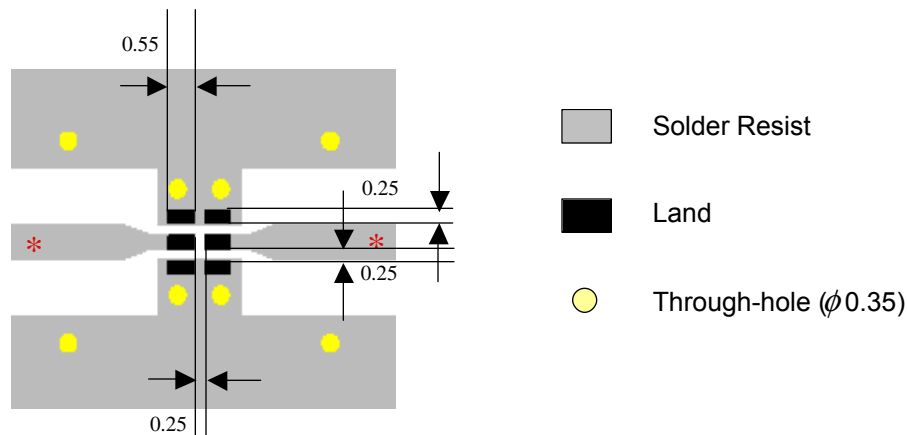

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.4 GHz Low Pass Filter

P/N 2450LP14A100

Detail Specification: 06/23/03

Page 2 of 2

Typical Electrical Performance (T=25°C)

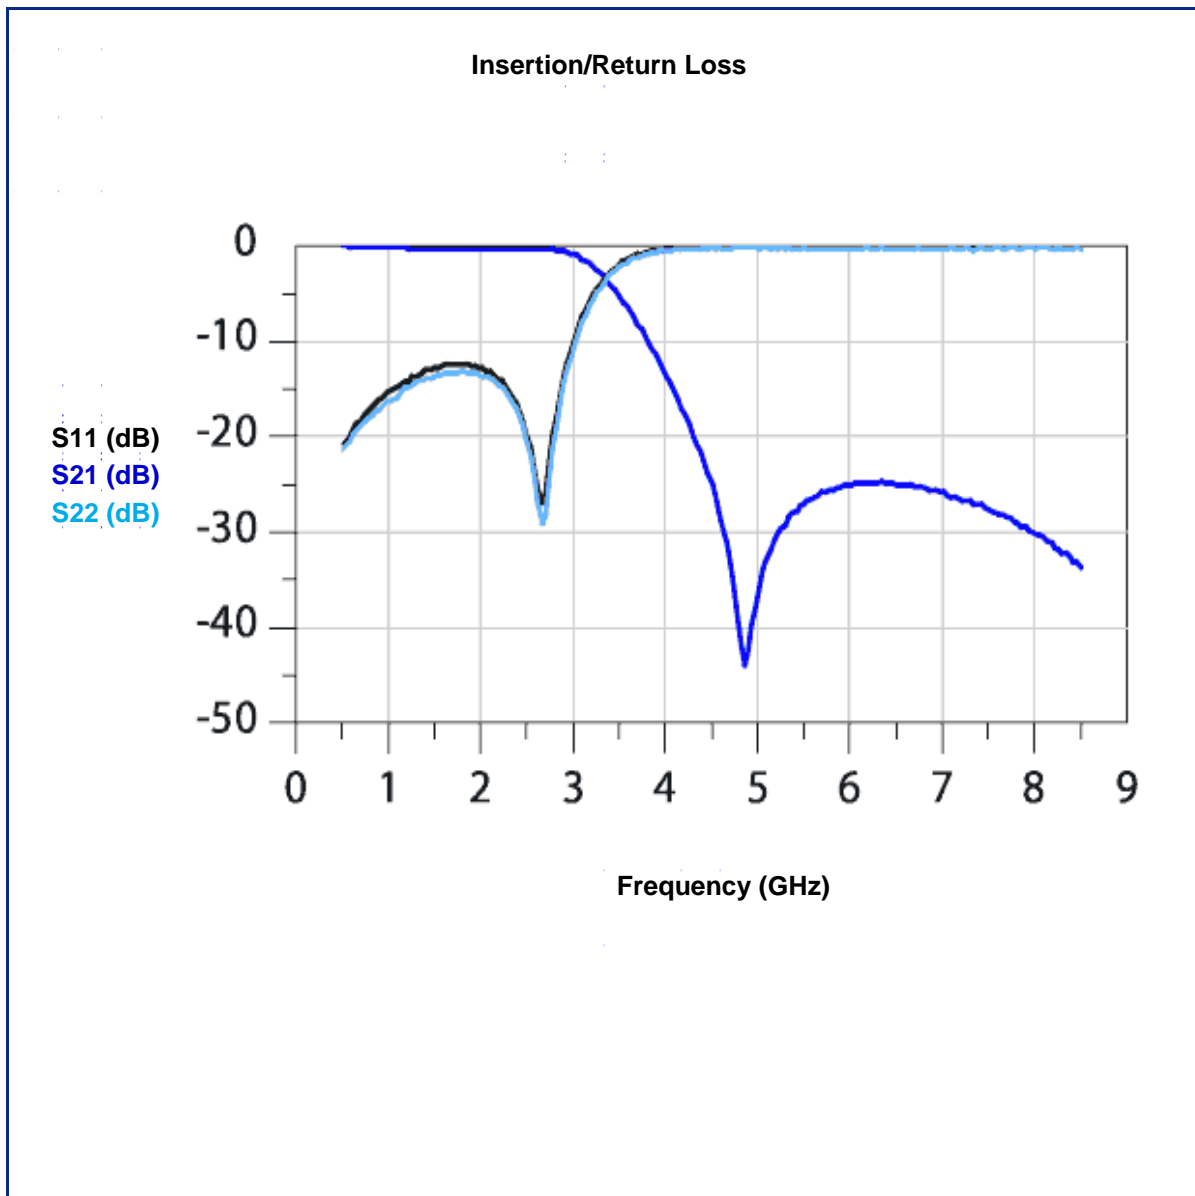

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



931931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.182

www.johansontechology.com

©2003 Johanson Technology, Inc. All rights reserved