

Contact insert module - HC-M-03-CT-F - 1414359

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert module, number of positions: 3, power contacts: 3, control contacts: 0, Socket, Crimp connection, 690 V, 40 A, 1.5 mm² ... 10 mm², application: Power

Key Commercial Data

Packing unit	5 STK
Minimum order quantity	5 STK
GTIN	
GTIN	4055626025025

Technical data

Dimensions

Height	44.7 mm
Width	34.2 mm
Length	14.6 mm

Electrical characteristics

Note	For HEAVYCON housing type B6 to B48, HC-M-B...MF... hinged module carrier frame required, CK4,0..... crimp contacts, crimp contacts not supplied as standard.
Rated voltage (III/3)	690 V
Rated current	40 A
Rated surge voltage	6 kV
Connection profile	3

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	1.5 mm ² ... 10 mm ²
Connection cross section AWG	16 ... 8

Contact insert module - HC-M-03-CT-F - 1414359

Technical data

Mechanical characteristics

Stripping length of the individual wire	9 mm (for 1.5 ... 2.5 mm ²)
	9.6 mm (for 4 mm ² ... 6 mm ²)
	15 mm (for 10 mm ² /conductor \geq 5 mm diameter)
	18 mm (for 10 mm ² /conductor \geq 6.4 mm diameter)
Contact diameter	4 mm
Wire diameter including insulation	7.5 mm
Insertion/withdrawal cycles	\geq 500
Minimum housing height	52 mm

General

Series	HC-M-03
Color	light gray
Number of module slots	1
Connection method	Crimp connection
Connection in acc. with standard	IEC/EN
Contact type	turned
Flammability rating according to UL 94	V0
Degree of pollution	3
Overvoltage category	III
Assembly instructions	Housing height \geq 52 mm. Plug-in connections may only be operated only when there is no load/voltage.
Connection	The CK4,0-EWZ tool (order no. 1662735) is required for removing the crimp contacts. At every "C" contact chamber, the position of the contact retaining springs is marked with two black markings on the connection side. From the connection side, the tool is pushed over the contact in a position-oriented manner, so that it touches both the retaining springs. Then insert it up to the limit stop. Do not turn the inserted tool. Push the conductor out of the insulating body along with the tool from the connection side.

Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

Standards and Regulations

Flammability rating according to UL 94	V0
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Contact insert module - HC-M-03-CT-F - 1414359

Schematic diagram




Diagram

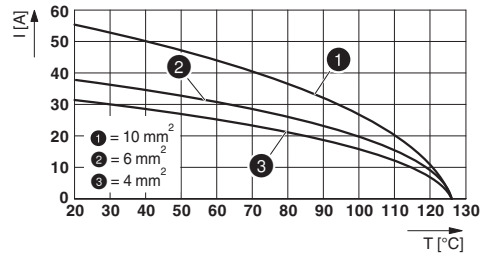

Connector pin assignment

Derating diagram (6 modules in HC-B 24 housing)

Dimensional drawing

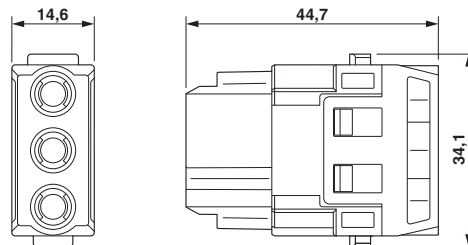

Approvals

Approvals

Approvals

UL Recognized / CSA / EAC / EAC


Ex Approvals


Approval details


UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E118976
mm²/AWG/kcmil	10		
Nominal current I _N	42 A		
Nominal voltage U _N	600 V		

Contact insert module - HC-M-03-CT-F - 1414359

Approvals

CSA		http://www.csagroup.org/services-industries/product-listing/	13631
mm ² /AWG/kcmil		10	
Nominal current I _N		33 A	
Nominal voltage U _N		600 V	

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>