



YLCDRZA1H

HIGH RESOLUTION EMBEDDED GUI SOLUTIONS KIT

TECHNICAL REFERENCE MANUAL



Disclaimer

By using this Renesas YLCDRZA1H, the user accepts the following terms. The YLCDRZA1H is not guaranteed to be error free, and the entire risk as to the results and performance of the YLCDRZA1H is assumed by the User. The YLCDRZA1H is provided by Renesas on an “as is” basis without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, title and non-infringement of intellectual property rights with regard to the YLCDRZA1H. Renesas expressly disclaims all such warranties. Renesas or its affiliates shall in no event be liable for any loss of profit, loss of data, loss of contract, loss of business, damage to reputation or goodwill, any economic loss, any reprogramming or recall costs (whether the foregoing losses are direct or indirect) nor shall Renesas or its affiliates be liable for any other direct or indirect special, incidental or consequential damages arising out of or in relation to the use of this YLCDRZA1H, even if Renesas or its affiliates have been advised of the possibility of such damages.

Precautions

This Renesas YLCDRZA1H is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and sensitive equipment. Its use outside the laboratory, classroom, study area or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures;

- Ensure attached cables do not lie across the equipment
- Reorient the receiving antenna
- Increase the distance between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected
- Power down the equipment when not in use
- Consult the dealer or an experienced radio/TV technician for help NOTE: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken;

- The user is advised that mobile phones should not be used within 10m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

The Renesas YLCDRZA1H does not represent an ideal reference design for an end product and does not fulfill the regulatory standards for an end product.

Table of Contents

Chapter 1 - Preface	1
Chapter 2 - Introduction and Purpose	2
2.1 - Hardware	2
2.2 - Hardware Block Diagrams	3
2.3 - Box Contents	4
2.4 - Software & Software Development Tools	4
2.5 - Usage Models	4
2.6 - Versions	5
Chapter 3 - Getting Started	6
3.1 - Powering the YLCDRZA1H	6
3.2 - See the Demo	6
3.3 - Connecting to the Segger J-Link On-Board Debugger	6
Chapter 4 – Specifications	7
4.1 - DC Characteristics	7
4.2 - AC Characteristics	7
4.3 - Environmental Characteristics	7
4.4 - Physical Characteristics	7
Chapter 5 - Power	8
5.1 - Main Power Subsystem	8
5.2 - 3.3V/1.8V Main Baseboard Power Subsystem	8
5.3 - LCD Backlight Power Subsystem	8
5.4 - LCD Logic and Bias Subsystem	8
5.5 - USB Host Power Subsystem	9
5.6 - 3.3V/1.18V Module Power Subsystem	9
Chapter 6 – Graphics Capacitive Touch LCD	10
6.1 - LCD Interface	10
6.2 - Capacitive Touch Controller	11
Chapter 7 – The MCU/Memory Module	13
7.1 - Renesas RZ/A1 MCU	13
7.2 - System Reset	13
7.3 - MCU Boot Mode Selection	14
7.4 - 64Mbytes SDRAM	14
7.5 - 64Mbytes Dual QSPI Serial NOR FLASH	14
7.6 - On-Module Clocking	14
7.7 - Spread Spectrum Clock Generator (SSCG)	15
7.8 - EEPROM	15

7.9 - Switches and LEDs	15
Chapter 8 – Baseboard.....	16
8.1 - Power	16
8.2 - Clocking	16
8.3 - LCD Connection and RGB888 to LVDS Translation	16
8.4 - e-MMC Memory	16
8.5 - 10/100 Ethernet Port	17
8.6 - Audio Subsystem	18
8.7 - Industrial Networking: CAN, RS232, RS485	18
8.7.1 - RS232, RS433, and RS485	19
8.7.2 - CAN	21
8.8 - SD Card Socket	21
8.9 - USB Host and Device	21
8.10 - Battery Backed Real Time Clock Calendar (RTCC).....	22
8.11 - PMOD Port	22
8.12 - Segger J-Link On-Board Debugger/Programmer	24
8.13 - Ambient Light Sensor	24
8.14 - Digital Video Camera	25
8.15 - Switches	25
8.16 - LEDs.....	26
8.17 - CryptoAuthentication	26
Chapter 9 – External Interrupt Summary	27
Chapter 10 – I2C Device Summary	28
Chapter 11 – SPI Device Summary	29
Chapter 12 - Schematics & Bills of Materials.....	31
12.1 - SO-DIMM Detail	31
12.2 - RZ Module Schematics	35
12.3 - RZ Module BOM	44
12.4 - Baseboard Schematics.....	45
12.5 - Baseboard BOM	59
Chapter 13 - Post Production Modifications	62
13.1 – I/O Baseboard v2.0.....	62
Chapter 14 - Additional Information.....	63

Chapter 1 - Preface

Cautions

This document may be, wholly or partially, subject to change without notice.

All rights reserved. Duplication of this document, either in whole or part is prohibited without the written permission of Renesas Solutions Corporation.

Trademarks

*All brand or product names used in this manual are trademarks or registered trademarks of their respective companies or organizations.

Copyright

© 2014 Renesas Electronics America, Inc. All rights reserved.

© 2014 Renesas Electronics Europe Ltd. All rights reserved.

© 2014 Renesas Electronics Corporation. All rights reserved.

© 2014 Renesas Solutions Corporation. All rights reserved.

Website: <http://www.renesas.com/>

Glossary

CPU	Central Processing Unit	USB	Universal Serial Bus
GUI	Graphical User Interface		

Chapter 2 - Introduction and Purpose


The Renesas YLCDRZA1H High Resolution Embedded GUI Solution Kit is a flexible and full-featured Human Machine Interface plus communications platform based on the Renesas RZ/A1H Microcontroller. While production worthy, the YLCDRZA1H is primarily intended for software and hardware developers to experiment and evaluate the extensive I/O features of the RZA1H on the YLCDRZA1H prior to development of their own customized and focused hardware daughter-cards and/or add-on hardware adjacent to the host module.

The YLCDRZA1H contains several communications ports, including 10/100 Ethernet, CAN, RS232, and RS485, as well as the popular PMOD™ connectors for external prototyping modules from [Digilent](#) and other vendors.

Distributor inventory of Renesas products [can be found here](#).

For more information on the Renesas YLCDRX63N Embedded GUI Solution Kit, visit the [Renesas website](#).

2.1 - Hardware

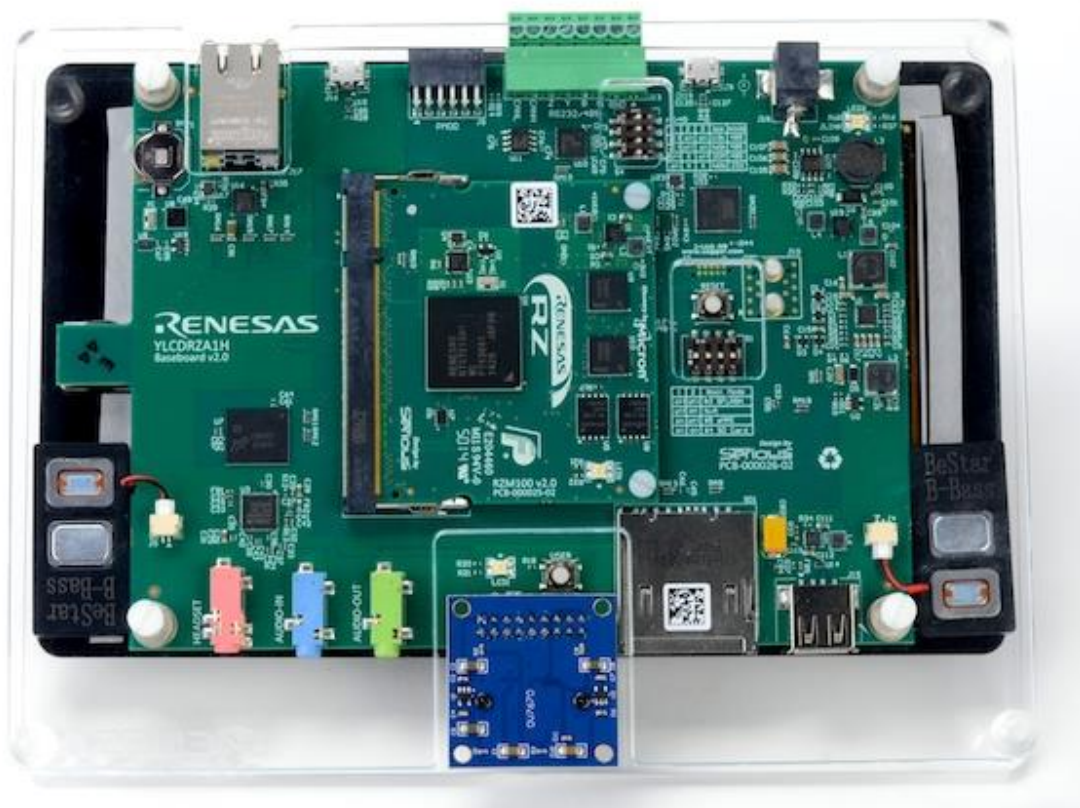

The YLCDRZA1H has three main elements:

- a re-usable SO-DIMM style module (the “RZ Module”) with MCU, DRAM, FLASH, local power and clocks,
- a full featured I/O baseboard, and,
- a high resolution 1280x800 IPS LCD with LVDS 24-bit color interface and capacitive touch sensing.

These elements come pre-assembled in the YLCDRZA1H kit in an acrylic enclosure along with various cables, power supplies, and accessories.

The MCU/memory module (the “RZ Module”) in the kit includes:

- Renesas RZ/A1H MCU with
 - 10Mbytes on-chip RAM, 400MHz ARM Cortex™-A9 processor
 - 32-Kbyte L1 instruction cache, a 32-Kbyte L1 data cache, and a 128-Kbyte L2 cache
 - 10-Mbyte large-capacity on-chip high-speed RAM with parallel data/address paths
 - [OpenVG*](#)-compliant Renesas graphics accelerator with JPEG encoder/decoder, capture engine unit, and pixel format converter


- 64Mbytes DRAM
- 64Mbytes Serial boot/XIP NOR FLASH in a dual-QSPI (x8) configuration
- On-DIMM power supplies for all on-module circuits
- 32.768kHz RTCC crystal and MCU clocks

The I/O Baseboard includes:


- 4GBytes e-MMC intelligent NAND flash “drive on chip”
- 9-25VDC barrel jack power input; standard 12V 10W EU/US wall adapter included in the kit
- CAN plus RS232/RS485 port on a 3.5mm screw terminal plug connector
- Digilent PMOD port with Type 2A (expanded SPI) and Type 4A (expanded UART) support
- 10/100 Ethernet Port on standard RJ45 CAT5/6 jack with dual indicator LEDs
- Stereo Audio with Dual 1W speakers, line in, line out, headset-style headphone out/microphone in
- Color VGA forward facing digital video camera
- SD Card socket (SDIO)
- High Speed USB 2.0 Host and Device ports
- Coin-cell battery-backed real time clock
- 0 to 50°C operating temperature range
- Segger J-Link On Board programmer/debugger
- Ambient light sensor, reset button, power indicator LED

2.2 - Hardware Block Diagrams

The RZ Module conceptually is structured as follows:

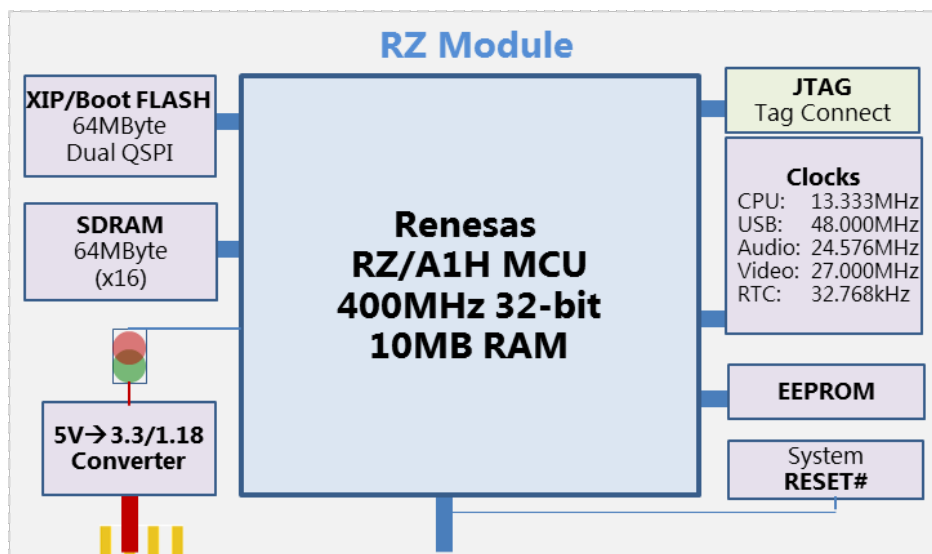

The baseboard incorporates the module as follows:

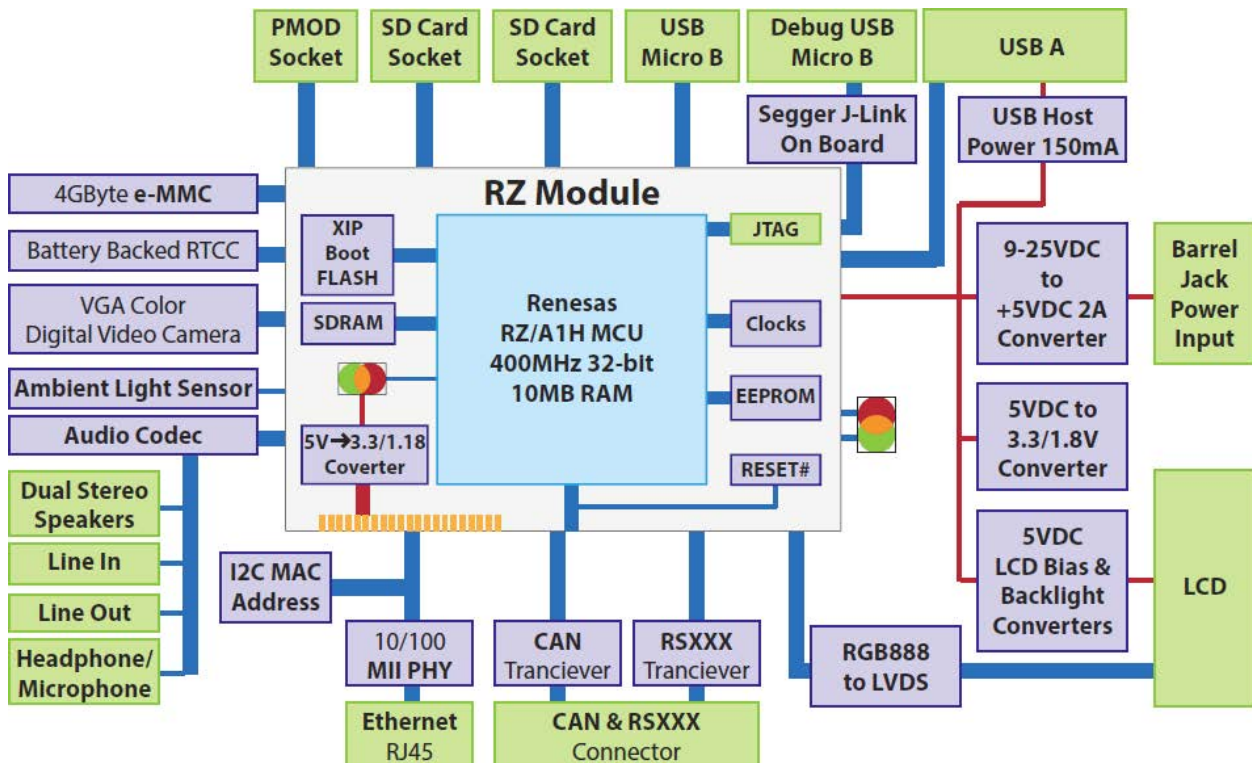

2.3 - Box Contents

The following items are included in the YLCDRZA1H package:

- YLCDRZA1H assembly, including I/O baseboard, LCD display, and RZ module, camera in an acrylic demo enclosure with adhesive silicone feet
- 9-25VDC US/EU Wall Power Supply
- 8 pin screw terminal plug for CAN/RS232/RS485 port
- Ethernet cable (1) and USB Micro B cables (2)

2.4 - Software & Software Development Tools

Renesas and their Platinum Partners, including [Serious Integrated](#) and [Express Logic](#) have developed numerous example projects demonstrating the various features of the YLCDRZA1H. Visit the [Renesas website](#) for more information.

Development for the YLCDRZA1H is supported under the [Renesas e2Studio](#) Eclipse-based framework, [ARM® DS-5 Development Studio](#), as well as the [IAR Embedded Workbench](#). No-cost fully-unlocked GNU C development tools from Renesas are available, as well as professional and fully-supported tools from IAR.

2.5 - Usage Models

The YLCDRZA1H is designed as an initial hardware reference platform as well as software development platform for OEM applications not only requiring sophisticated LCD-based GUI Human Machine Interface (HMI) capabilities but also extensive communications. The platform has little to no GPIO control on-board, and generally will be used in conjunction with an OEM's I/O subsystem, possibly communicating with the YLCDRZA1H over RS232, RS485, or UART/SPI using the PMOD connectivity.

For more extensive GPIO connectivity, more flexible port assignments and experimentation with MCU features, the complete Renesas RZ/A1H Development Kit [YR0K77210S003BE](#) is recommended.

2.6 - Versions

The production version of the MCU/Memory module is v2.0 as marked on the module silk screen. All units in circulation should have this version.

Two versions of the Baseboard have been distributed, marked v2.0 and v2.1 on the silk screen respectively. The v2.1 Baseboard has two notable changes from v2.0:

- 1) The USBH Power Enable, hardwired to “always on” in v2.0, is now connected through an inverter to P1.6. On power up, the USBH power delivery is disabled. When the port pin is asserted low, the inverted (active high) signal enables the USBH Power subsystem.
- 2) Improved USB signal routing/integrity for more reliable High Speed operation

Chapter 3 - Getting Started

The YLCDRZA1H assembly comes pre-assembled, and requires no initial assembly to operate out of the box.



Some elements, such as the LCD to the top acrylic ring, are bonded with high performance adhesive: do not attempt to detach the LCD from the acrylic or disassemble any element not fastened by simple nylon screws.



The RZ Module comes pre-inserted into the SO-DIMM socket and fastened to the Baseboard via two screws. Only remove/install this module with the power completely removed.

3.1 - Powering the YLCDRZA1H

The YLCDRZA1H can only be powered via the barrel jack, and can accept any input voltage from 9 to 25VDC (center positive) power supply with 10W or more capability; the kit comes with a standard UL/CSA/CE 12V 10W adapter with both an EU and US capability more than sufficient to power the unit.

Plugging in the 12V adapter will light up the green LED near the barrel jack, confirming the board is powered. The RZ Module also has a local green power LED showing that it, too, is powered. The Baseboard LED near the barrel jack may flash orange – this is the Segger J-Link debugger activity notification.




3.2 - See the Demo

A demo, pre-installed in the RZ Module's serial FLASH, will start up when the module is first powered. If during the course of software development this demo is erased from the serial FLASH you can download this demo [from the Renesas website](#) and re-install it using your software development tools and the on-board Segger J-Link On-Board debugger.

3.3 - Connecting to the Segger J-Link On-Board Debugger

The kit comes with two (2) USB Micro B cables suitable for connecting a PC to the YLCDRZA1H. Use one of these to connect to the USB Micro connector J9 near the power jack. This is your debugger connection, and is only required when doing software development with the YLCDRZA1H.

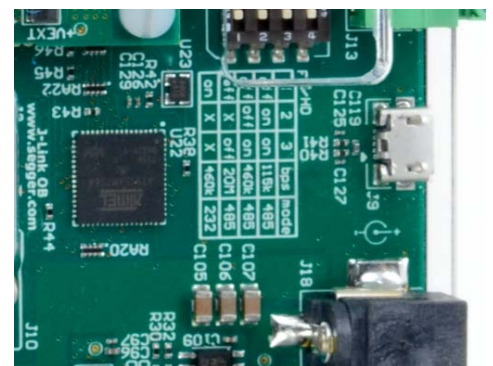

Chapter 4 – Specifications

4.1 - DC Characteristics

The DC characteristics of the I/O elements of the platform are governed by the underlying AC timing characteristics of the individual components. Consult the [bill of materials](#) and component data sheets for more information.

Specification	Permissible			
	Minimum	Typical	Maximum	Unit
Input Voltage to Barrel Jack	9	12	25	VDC
Input Power to Barrel Jack			10	W

4.2 - AC Characteristics

The AC timing characteristics at the module level are governed by the underlying AC timing characteristics of the individual components. Consult the [bill of materials](#) and component data sheets for more information.

4.3 - Environmental Characteristics

The YLCDRZA1H, while designed with production-worthy methods and components, is not designed as a production unit to be used direction in OEM equipment. Contact Renesas for a list of hardware design partners who can develop and deliver production-ready platforms based on the ingredients used in the YLCDRZA1H kit.

Specification	Permissible			
	Minimum	Typical	Maximum	Unit
Operating Temperature	0		50	C
Storage Temperature	-20		60	C
Humidity (Non-condensing)			90%@50C	RH

4.4 - Physical Characteristics

The outer dimensions of the YLCDRZA1H, with acrylic enclosure, are approximately 207mm x 53mm x 33mm.

Chapter 5 - Power

The YLCDRZA1H has 6 different power subsystems on board:

- Baseboard Power:
 - Main power input 9-25VDC in, 5VDC out 2A buck switcher
 - 3.3V/1.8V buck switcher for Baseboard logic and I/O
 - LCD Backlight boost constant-current supply
 - LCD bias and drive voltage boost supplies
 - USB Host 150mA current-limited supply
- RZ Module Power
 - 3.3V/1.8V buck switcher for local RZ Module clocks, memory, and the MCU

Many of these may not be needed in your own derivative designs, but are included in the design so you can pick and choose depending on your specific requirements. A detailed discussion of each subsystem follows.

5.1 - Main Power Subsystem

The YLCDRZA1H can accept 9-25VDC from the Switchcraft [RASM712PX](#) barrel jack. The jack is designed to accept an industry-standard 5.5mm OD/2.5mm ID barrel plug with positive center.

The two power signals **+VIN** and **GND** are connected downstream directly to the main buck converter which delivers 5VDC at up to 2A (via signal **+5V**) to the whole assembly for use by various subsystems and further regulation. No other circuits on the YLCDRZA1H use the 9-25VDC **+VIN** power signal.

The **+5V** power signal directly powers the green portion of the Baseboard tri-color LED. The red portion of that LED is driven by the Segger J-Link On Board activity indicator.

The **+5V** power signal is the only power delivered for use by the RZ Module, which has its own subsequent regulation on-module.

5.2 - 3.3V/1.8V Main Baseboard Power Subsystem

Almost all the circuits on the Baseboard require 3.3 volts. The camera module and audio subsystem, in addition, both requires 1.8V. A dual buck switcher takes the **+5V** power signal and delivers 3.3V at up to 2A (**+3V3**) for most circuits on the board as well as 1.8V (**+1V8**) required by the audio subsystems.

5.3 - LCD Backlight Power Subsystem

The LCD on the YLCDRZA1H is backlit by an array of LEDs. This array requires a constant current supply of 100 mA at approximately 12.8VDC. The ability to pulse width modulate (PWM) this supply is important to enable well-controlled backlight dimming, and the ability to turn off the backlight is important for power management – 100mA at 12.8V is approximately 1.3W of power, and factoring in the boost conversion efficiency approximately 1.6W of power from the input supply. Unlike other power systems where typical is normally much less than maximum, this is a typical number as the LEDs are actually run at this power.

The **+5V** main power signal feeds a constant current boost controller delivering this 100mA to the LCD backlight. A PWM-capable MCU port bit is connected to this controller's ENABLE# pin:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P8.12	PWM1E	P8_12/PWM1E-BLEN	18	RZM-BLEN	LCD Backlight Enable (active high)

5.4 - LCD Logic and Bias Subsystem

As is common with most LCDs, the LCD panel in the kit requires a 3.3V supply. In this case, the 3.3V supply must be up to 300mA and is provided by the [5.2 - 3.3V/1.8V Main Baseboard Power Subsystem](#) signal **+3V3**. This power supply is always on when the system is powered.

LCD panels also need a variety of other voltages to drive the LCD active elements, and most small LCD panels have all the voltage converters internally in the panel to make the system designer's life easy. As the panels increase in size, these voltages are often expected from the system rather than generated in the panel, especially for thin panels with minimal internal space. In addition to 3.3V, the panel on the YLCDRZA1H requires all these voltages to be supplied:

Item	Symbol	Min.	Typ.	Max.	Unit
Power voltage	AVDD	9.54	9.74	9.94	V
	VGH	22.4	22.7	23	V
	VGL	-7.7	-8	-8.3	V
Input signal voltage	VCOM	3.0	3.3	3.6	V
Current of AVDD Power supply	I _{AVDD}	-	30	80	mA
Supply Current for Gate Driver (High level)	I _{VGH}	-	0.3	1.1	mA
Supply Current for Gate Driver (Hi level)	I _{VGL}	-	0.3	1.1	mA

The Baseboard has a complete power generation subsystem for these other voltages. This subsystem is also always enabled when the system is powered.

5.5 - USB Host Power Subsystem

While the USB host A connector could have been driven directly from +5V (or at least via a high-side FET power switch for enable control), the design incorporates a 150mA current limited design to ensure that an inappropriate high-load device does not crash the board or overstress the main power system. At currents above 150mA, the voltage on the output to the connector drops precipitously to limit the current.

Port	MCU	Schematic		Operation
	Mode	Module	# Baseboard	
	VBUSIN1	VBUSIN1	41 RZM-USBF_VBUS	USB Device ("Function") VBUS Detect
P1.6	see below	¹ P1_6-USBH_5V_EN#	132 RZM-USBH_5V_EN#	USB Host VBUS Power Out Enable (active low)
	VBUSIN0	VBUSIN0	43 RZM-USBH_VBUS	USB Host VBUS Detect
P1.12	TINT20/GPI	P1_12/TINT20-USBH_OC	56 RZM_USBH_OC#	USB Host VBUS Overcurrent Detect (active low)

On v2.0 units, P1.6 was incorrectly used to drive the USB Host Power Enable (RZM-USBH_5V_EN on the RZ Module; DIMM pin 132). This port is open drain only on the MCU, and is incapable of driving high and enabling the power supply. All v2.0 units should include a post-production modification connecting U21 pin 7 (ENUSB) to U21 pin 8 (FAULT#) to enable the USB supply during all non-overcurrent situations. Version 2.1 units have an inverter with input pull-up added to this path. In this configuration, the RESET# condition disables the USB Host Power Enable, and asserting P1.6 low enables the USB Host Power.

Software intending on using the USB Host Power Subsystem needs to accommodate both the v2.0 with post-production modification as well as the v2.1 units, since in the former case the USBH_5V_EN# pin should not be driven low and in the latter, driving it low is required to enable USB Host power. During driver initialization, perform the following sequence to determine a v2.0 vs. v2.1 baseboard:

Set USBH_5V_EN# to low
USBH_EnableValue = inverse of read value of USBH_OC#

On v2.1, setting USBH_5V_EN# low will drive the enable high (via the inverter); assuming a non-overcurrent situation immediately after the enable the read value of OC# will be high, indicating a 2.1 board. On v2.0, setting USBH_5V_EN# low drive the enable low (no inverter), which since pin 7 & 8 are tied together, we'll see an overcurrent active (low) as well, indicating a 2.0 board. Use the inverted value of the OC# test read from now on in the driver to enable or disable the USB Host Power subsystem.

5.6 - 3.3V/1.18V Module Power Subsystem

The RZ Module is powered by the +5V power signal from the Baseboard. The MCU, memory, and clocks on the module require 3.3V and the MCU requires 1.18V for its core voltage. The RZ Module contains a dual 5V in dual output 3.3/1.18V buck switcher that delivers the voltages exclusively for the module's usage as module schematic signals +3V3 and +1V18 respectively. These are not joined with any power signals on the Baseboard except by sharing a common system ground.

Chapter 6 – Graphics Capacitive Touch LCD

One of the most important features of the YLCDRZA1H is the high resolution LCD graphic color display with the following characteristics:

- 1280x800 pixel resolution
- [In Plane Switching \(IPS\) technology](#) for excellent visibility at nearly any viewing angle
- Integrated capacitive touch controller
- 24-bit color [Low Voltage Differential Signaling \(LVDS\) interface](#)

6.1 - LCD Interface

Lower resolution displays, typically at and below 800x480 (WVGA), use parallel RGB (red green blue) interfaces, for example 8 bits for red, 8 for blue, and 8 for green over a 24-bit wide cable to the LCD along with other control signals such as clock, data enable, vertical, and horizontal sync. The RZ/A1H has a built-in RGB LCD interface capable of driving such displays at 16, 18, or 24 bits wide for RGB565 (65,536 color), RGB666 (262,144 color), or RGB888 (16M color) support respectively.


As pixel resolutions increase, the electrical noise generated and routing challenges due to wide high speed parallel buses over the 3-10" cable to the LCD become problematic and a few Low Voltage Differential Signal (LVDS) channels are used where each color (red, green, blue) along with and the control signals are encoded and serialized, often resulting in an 8 signal cable (4 differential pairs). The Renesas RZ/A1H MCU, in addition to its 24-bit RGB interface, also has an 18-bit color LVDS interface.

The MCU's LVDS interface is very well suited to many high-resolution OEM applications. It is very cost effective, requiring smaller cables and connectors than parallel RGB and is natively supported by the MCU with minimal external components beyond a few impedance matching resistors.

For lower resolution applications, typically 800x480 and below, the RGB interface is an excellent solution.

In order to fully highlight the capabilities of the MCU's graphics controller, the YLCDRZA1H uses the full 24-bit color RGB888 interface. However the LCD panel is an LVDS panel. The YLCDRZA1H Baseboard includes a low cost RGB888 to LVDS serializer to convert the signal format from the MCU to the LCD's required timing/orientation:

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock Frequency	fcik	(67.55)	(71.11)	(78.22)	MHz	Frame rate =60Hz
Horizontal display area	thd	1280				
HS period time	th	(1410)	(1440)	(1470)	DCLK	
HS Blanking	thb	130	160	190	DCLK	
Vertical display area	tvd	800				
VS period time	tv	(813)	(823)	(833)	H	
VS Blanking	thb	13	23	33	H	

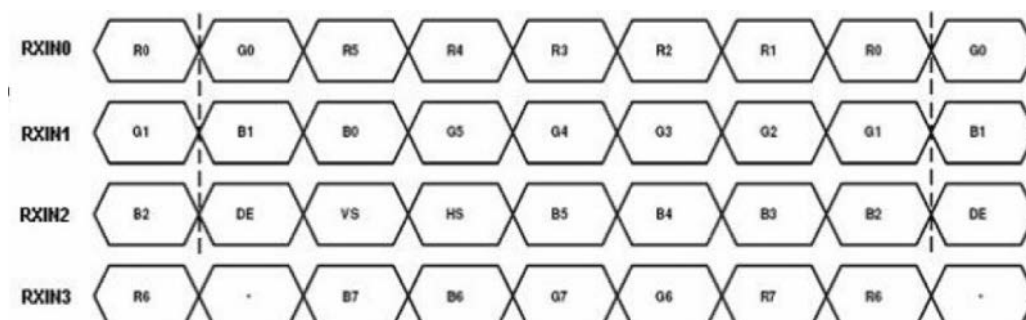

Both the MCU's RGB and LVDS interfaces are fully exposed to the RZ Module's edge fingers, however the LVDS signals are not connected or used on the YLCDRZA1H Baseboard. The RZ Module chapter describes the edge finger assignment. A baseboard could be designed that uses the RZ Module and employs the LVDS rather than RGB interface.

The LCD RGB data, control and power signals are wired on the YLCDRZA1H assembly as follows:

Port	MCU	Schematic			Operation
	Function	Module	#	Baseboard	
P8.12	PWM1E	P8_12/PWM1E-BLEN	18	RZM-BLEN	LCD Backlight Enable (active high)
P3.0	LCD0_CLK	P3_0/LCD_CLK	23	RZM-LCD_CLK	Dot Clock
P11.8	LCD0_TCON6	P11_8/LCD_DEN	3	RZM-LCD_DEN	Data Enable
P11.9	LCD0_TCON5	P11_9/LCD_VSYNC	5	RZM-LCD_VSYNC	Vertical Sync
P11.10	LCD0_TCON4	P11_10/LCD_HSYNC	8	RZM-LCD_HSYNC	Horizontal Sync
P11.7	LCD_DATA0	P11_7/LCD_DATA0	4	RZM-LCD_DATA0	Blue 0 (LSB)
P11.6	LCD_DATA1	P11_6/LCD_DATA1	6	RZM-LCD_DATA1	Blue 1
P11.5	LCD_DATA2	P11_5/LCD_DATA2	199	RZM-LCD_DATA2	Blue 2
P11.4	LCD_DATA3	P11_4/LCD_DATA3	197	RZM-LCD_DATA3	Blue 3
P11.3	LCD_DATA4	P11_3/LCD_DATA4	177	RZM-LCD_DATA4	Blue 4
P11.2	LCD_DATA5	P11_2/LCD_DATA5	183	RZM-LCD_DATA5	Blue 5
P11.1	LCD_DATA6	P11_1/LCD_DATA6	175	RZM-LCD_DATA6	Blue 6
P11.7	LCD_DATA0	P11_7/LCD_DATA0	181	RZM-LCD_DATA7	Blue 7 (MSB)
P4.0	LCD_DATA8	P4_0/LCD_DATA8	103	RZM-LCD_DATA8	Green 0 (LSB)
P4.1	LCD_DATA9	P4_1/LCD_DATA9	66	RZM-LCD_DATA9	Green 1
P4.2	LCD_DATA10	P4_2/LCD_DATA10	68	RZM-LCD_DATA10	Green 2
P4.3	LCD_DATA11	P4_3/LCD_DATA11	70	RZM-LCD_DATA11	Green 3
P4.4	LCD_DATA12	P4_4/LCD_DATA12	105	RZM-LCD_DATA12	Green 4
P4.5	LCD_DATA13	P4_5/LCD_DATA13	78	RZM-LCD_DATA13	Green 5
P4.6	LCD_DATA14	P4_6/LCD_DATA14	82	RZM-LCD_DATA14	Green 6
P4.7	LCD_DATA15	P4_7/LCD_DATA15	111	RZM-LCD_DATA15	Green 7 (MSB)
P5.0	LCD_DATA16	P5_0/LCD_DATA16	142	RZM-LCD_DATA16	Red 0 (LSB)
P5.1	LCD_DATA17	P5_1/LCD_DATA17	144	RZM-LCD_DATA17	Red 1
P5.2	LCD_DATA18	P5_2/LCD_DATA18	154	RZM-LCD_DATA18	Red 2
P5.3	LCD_DATA19	P5_3/LCD_DATA19	156	RZM-LCD_DATA19	Red 3
P5.4	LCD_DATA20	P5_4/LCD_DATA20	148	RZM-LCD_DATA20	Red 4
P5.5	LCD_DATA21	P5_5/LCD_DATA21	150	RZM-LCD_DATA21	Red 5
P5.6	LCD_DATA22	P5_6/LCD_DATA22	160	RZM-LCD_DATA22	Red 6
P5.7	LCD_DATA23	P5_7/LCD_DATA23	162	RZM-LCD_DATA23	Red 7 (MSB)

6.2 - Capacitive Touch Controller

The LCD on the YLCDRZA1H includes a capacitive touch sensor system and built-in [Pixcir Tango C48](#) controller. The C48 has the following features:

- 400kHz I2C interface with activity interrupt out
- 5 finger simultaneous multi-touch detection
- Palm detection for lock function, and
- <100 idle-to-active touch response time.

The 7-bit I2C address of the C48 controller is **0x5C**:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x5C	0xB9	0xB8	1	400	Baseboard	Pixcir C48 Capacitive Touch Controller

[Chapter 10 – I2C Device Summary](#) lists all the I2C devices on the YLCRZA1H.

On system boot the controller is held in reset with a weak pull-up on the **P8_13-TOUCH_RST** signal and the driver should drive this signal low to enable the C48 to accept commands. The controller is connected as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P8_13	GPIO	P8_13-TOUCH_RST	7	RZM-TOUCH_RST	LCD Touch controller reset (active high)
P1_10	IRQ4	P1_10/IRQ4-TOUCH_IRQ	52	RZM-TOUCH_IRQ	LCD Touch controller interrupt
P1_2	SCL1	P1_2/SCL1	165	RZM-SCL1	Touch dedicated I2C1 Clock
P1_3	SDA1	P1_3/SDA1	169	RZM-SDA1	Touch dedicated I2C1 Data


The [Pixcir Tango C48](#) instruction set and data sheet are available only under non-disclosure agreement from [Pixcir](#).

Chapter 7 – The MCU/Memory Module

As discussed, the YLCDRZA1H is comprised of two circuit boards, the Baseboard and the MCU/Memory module, or “RZ Module” that plugs into the Baseboard via a commodity 200 pin SO-DIMM socket. For a complete pin-out of the SO-DIMM socket, see [Chapter 12.1 - SO-DIMM Detail](#).

The MCU/memory module (the “RZ Module”) in the kit includes:

- Renesas RZ/A1H MCU
- 64Mbytes DRAM
- 64Mbytes Serial boot/XIP NOR FLASH in a dual-QSPI (x8) configuration
- On-DIMM power supplies for all on-module circuits
- 32.768kHz RTCC crystal and 12MHz MCU clock
- 2kbit configuration/user EEPROM
- On-module system reset

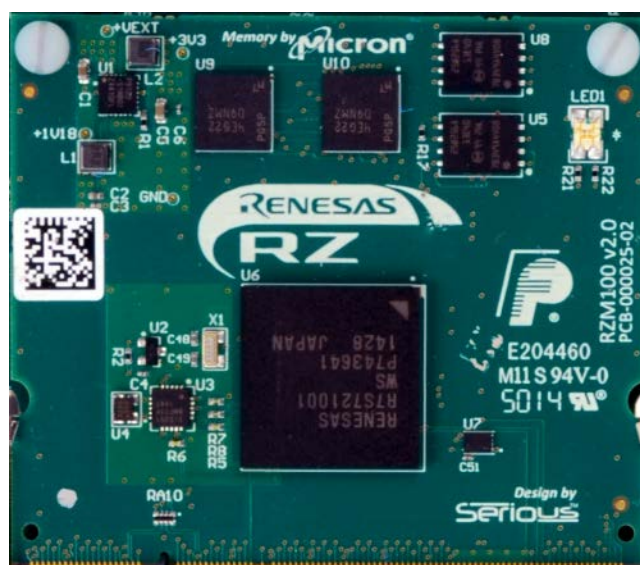

The local power supplies are fully described in [Section 5.6 - 3.3V/1.18V Module Power Subsystem](#).

7.1 - Renesas RZ/A1 MCU


The Renesas RZ/A1 MCU family has several members; the YLCDRZA1H uses the R7S721001VCBG with the following key features:

- 10Mbytes on-chip RAM, 400MHz ARM Cortex™-A9 processor
- 32-Kbyte L1 instruction cache, a 32-Kbyte L1 data cache, and a 128-Kbyte L2 cache
- 10-Mbyte large-capacity on-chip high-speed RAM with parallel data/address paths
- [OpenVG™](#)-compliant Renesas graphics accelerator with JPEG encoder/decoder, capture engine unit, and pixel format converter
- SDRAM controller
- 324 pin BGA

The MCU is fully described in the Renesas RZ/A1H Group User’s Manual: Hardware along with other documentation on the [Renesas RZ/A1 Family Documentation Website](#).

7.2 - System Reset

The RZ Module includes a small system reset chip, designed to not only reset the MCU but any attached baseboard if desired. On power-up, the system reset is asserted low for approximately 100-250mS and then is released to rise high with a simple pull-up resistor. Pushbutton S3 on the baseboard is connected directly to this reset signal – the reset chip automatically senses the pushbutton and, when pressed (RESET# grounded) debounces the switch and initiates a reset cycle as if power were being applied for the first time.




MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
RES	RES	RESET#	27	RZM-RESET#	System Reset (open drain, active low) Also RESET Pushbutton S3 on Baseboard

7.3 - MCU Boot Mode Selection

The RZ/A1H MCU can boot from a variety of memory devices, selectable by the levels present on the **MD_BOOT2/1/0** pins on the MCU when **RES** is de-asserted. The Baseboard includes a 4 element DIP Switch where switch 1 and 2 control **MD_BOOT1/2** respectively.

Option			Boot Mode		YLCDRZA1H Support
MD_BOOT2	MD_BOOT1	MD_BOOT0	#	Description	
-	0	0	0	CS0# RAM/ROM	No
-	1	0	1	CS1# RAM/ROM	No
1	0	1	3	Serial FLASH	Default
0	1	1	4	SD Card	via Baseboard
1	1	1	5	e-MMC	via Baseboard

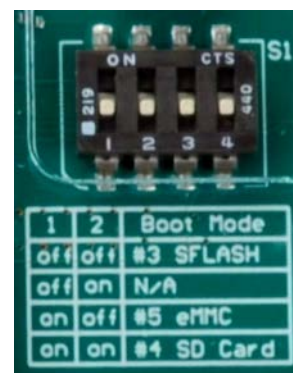

On the YLDRZA1H, the **BOOTMD2/1/0** pins have a default weakly strapped selection to the serial FLASH on the RZ Module (since the module has the serial FLASH populated), but the boot mode can be changed on the Baseboard through DIP switch S1. The boot pins are controlled/connected as follows:

Port	MCU	Schematic			Operation
	Function	Module	#	Baseboard	
P7.0	MD_BOOT2	P7_0/MD_BOOT2	179	RZM-BOOT2	Weakly high (47kΩ) on RZ Module S1.2 pulls this low (GND) when ON
P0.1	MD_BOOT1	P0_1/MD_BOOT1	61	RZM-BOOT1	Weakly low (47kΩ) on RZ Module S1.1 pulls this high (4.7kΩ) when ON
P0.0	MD_BOOT0	P0_0/MD_BOOT0	-	-	Permanently high on RZ Module

7.4 - 64Mbytes SDRAM

The Renesas RZ/A1H MCU has a full on-chip 16-bit SDRAM controller. The YLCDRZA1H RZ Module has this SDRAM connection (address, data, control) isolated on the module connected to two (2) Micron 32MByte SDRAM devices for a total of 64MBytes of system DRAM.

7.5 - 64Mbytes Dual QSPI Serial NOR FLASH

The Renesas RZ/A1H MCU supports two (2) parallel Quad SPI (QSPI) interfaces designed for direct-attach to Serial NOR FLASH devices. In this configuration, the MCU can boot from the primary device in single-SPI traditional 4-wire (MISO, MOSI, SCLK, SS#) mode and software can switch access modes such that both devices are accessed simultaneously in QSPI mode for an equivalent 8-bit wide interface at very high speed.

Not only can the MCU access these devices as data storage areas, but it can also execute in place (XIP) from the devices at surprisingly high speeds – the MCU's SPI Multi I/O Bus Controller handles all the SPI traffic and FLASH commands to make the devices completely memory mapped and accessible as if it were on a traditional address/data bus.

The YLCDRZA1H features two Micron N25Q256A13EF840E NOR Serial FLASH devices with 32Mbytes each, totaling 64Mbytes connected in the Dual QSPI configuration.

7.6 - On-Module Clocking

On the RZ Module there are two local clocks for use by the MCU. A simple 32.768 kHz tuning fork crystal is attached to the MCU to drive the on-chip Real Time Clock Calendar (RTCC). There is no VBAT battery backup capability on the chip, so this oscillator must be re-enabled at each MCU reset. The YLCDRZA1H has an I2C Battery Backed RTCC chip with coin cell for this purpose, and on system reset software can retrieve the battery-backed date/time from the external RTCC and load the internal RTCC for quick software access at runtime.

While the MCU can operate with as little as a single 12MHz oscillator for the core, USB, and peripherals, to fully exploit the capabilities of the MCU a variety of input clocks are desirable:

- 13.3333MHz to enable the core at 400MHz
- 27.0MHz for video

- 24.576MHz to deliver industry standard audio frequencies
- 48.000MHz for USB

The RZ Module includes a complete clock oscillator/synthesizer subsystem generating and delivering all four of these frequencies to the MCU. These are not crystals but rather external clock sources to the MCU therefore software should not turn on the crystal oscillator drivers for these clock inputs.

The clock synthesizer/generator is a Silicon Labs Si5351C. At power-up, the device is factory programmed for the frequencies listed above, but the Si5351C is an I2C device and the generated frequencies can be modified at runtime if desired. Whether for EMI tuning, power management, or, for example, to change the input frequencies for different audio sampling/generation time bases beyond the capabilities of the MCU's programmable prescaler, this feature can be valuable in many system designs.

The Si5351C is available on the I2C bus 0 as device number 0x60:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x60	0xC1	0xC0	0	400	Module	Si5351C Clock Synthesizer

[Chapter 10 – I2C Device Summary](#) lists all the I2C devices on the YLCRZA1H.

The interrupt output (INTR) of the Si5351C is not connected to the MCU.

7.7 - Spread Spectrum Clock Generator (SSCG)

The Renesas RZ/A1H MCU has the ability to slightly and randomly modulate the internal PLLs to dampen potential and undesirable RF emissions. This feature is controlled by the MCU's **MD_CLKS** pin, which is weakly (47kΩ) pulled low (disabled) on the RZ Module. The Baseboard DIP Switch S1 position 3 (when ON) strongly (4.7kΩ) pulls this high and enables this feature on the MCU.

Port	MCU	Schematic			Operation
	Function	Module	#	Baseboard	
P0.3	MD_CLKS/GPIO	P0_3/MD_CLKS	176	RZM-SSCG	Enables Spread Spectrum Clocking in MCU by Baseboard S1.2 (ON/active GND, OFF pulled high (4.7kΩ) on RZ Baseboard)

Note this pin is sampled on the release of system reset, after which a different Baseboard design could optionally use this signal for a GPIO or other function at runtime.

7.8 - EEPROM

On the MCU/Memory module is a small I2C EEPROM, an [On Semiconductor CAT34C02](#), located on I2C bus 0 at 7-bit address 0x57:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x57	0xAD	0xAC	0	400	Module	CAT34C02 EEPROM

[Chapter 10 – I2C Device Summary](#) lists all the I2C devices on the YLCRZA1H.

7.9 - Switches and LEDs

The MCU/Memory module has a single dual-color red and green LED that can be turned on independently and when both are on simultaneously the LED appears orange. The green LED is powered automatically when the local 3.3V power is present. The red LED is controlled by a processor GPIO for software use:

Port	MCU	Schematic			Operation
	Function	Module	#	Baseboard	
P11.11	GPIO	P11_11-LED1R			Module LED Red (active high)

There are no other switches, jumpers or other user I/O on the module.

Chapter 8 – Baseboard

The I/O Baseboard included with the YLCDRZA1H includes:

- 9-25VDC barrel jack power input with 5V 2A DC-DC converter for Baseboard and RZ Module
- All local power supplies and clocks
- RGB888 to LVDS translator and connection to LVDS LCD
- Connection to the 4GBytes e-MMC intelligent NAND flash “drive on chip”
- CAN plus RS232/RS485 port on a 3.5mm screw terminal plug connector
- 10/100 Ethernet Port on standard RJ45 CAT5/6 jack with dual indicator LEDs
- Stereo Audio with Dual 1W speakers, line in, line out, headset-style headphone out/microphone in
- Color VGA forward facing digital video camera
- SD Card socket (SDIO)
- High Speed USB 2.0 Host and Device ports
- Coin-cell battery-backed real time clock
- Digilent PMOD* port with Type 2A (expanded SPI) and Type 4A (expanded UART) support
- Segger J-Link On Board programmer/debugger
- User I/O including ambient light sensor, user and reset pushbuttons, user and power LEDs

8.1 - Power

The YLCDRZA1H's Baseboard has 5 different power subsystems:

- Main power input 9-25VDC in, 5VDC out 2A buck switcher
- 3.3V/1.8V buck switcher for Baseboard logic and I/O
- LCD Backlight boost constant-current supply
- LCD bias and drive voltage boost supplies
- USB Host 150mA current-limited supply

These are all described in [Chapter 5 - Power](#).

8.2 - Clocking

There are several clock sources generated and used on the Baseboard for various peripherals.

- 32,768 kHz crystal for the [Battery Backed Real Time Clock Calendar \(RTCC\)](#)
- 25.000 MHz oscillator for the [10/100 Ethernet Port](#)
- 24.000 MHz oscillator for the [Digital Video Camera](#)
- Audio clock generated in the RZ MCU on the RZ Module for the [Audio Subsystem](#)

8.3 - LCD Connection and RGB888 to LVDS Translation

As mentioned above, even though the RZ/A1H has an 18-bit color LVDS port native on the MCU (and brought to the connector for optional use by a baseboard), the YLCDRZA1H elects to feature the full 24-bit color capabilities of the RZ/A1H and use the RGB888 port instead.

The LCD display, however, is LVDS. Therefore the baseboard includes a straightforward and inexpensive RGB888 to LVDS translator.

This interface, including MCU signals and connector pins, are described in detail in [Chapter 6.1 - LCD Interface](#)

8.4 - e-MMC Memory

In addition to the memory on the RZ Module, the Baseboard adds a 4 Gigabyte “embedded MultiMedia Card” or e-MMC. This is a complete FLASH drive-on-a-chip, with built in wear levelling, bad block management, and more. Software drivers are greatly simplified compared with using NAND FLASH directly. [The Micron MTFC4GMDEA-4M](#)

is an e-MMC v4.41 compatible device; for more information about the e-MMC specification see the [JEDEC MMC Specification](#).

Normally, the e-MMC will be used by a software application to run a file system, such as a FAT file system, storing GUI data and other files, possibly including applications and demos.

The RZ/A1H MCU has a built-in MMC controller, and the e-MMC chip is connected as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P0.4	GPO	P0_4-MMC_RST#	31	RZM-MMC_RST	MMC Reset (active low with pull-up)
P3.13	MMC_CMD	P3_13/MMC_CMD	97	RZM-MMC_CMD	MMC Command/response
P3.12	MMC_CLK	P3_12/MMC_CLK	91	RZM-MMC_CLK	MMC clock
P3.11	MMC_D0	P3_11/MMC_D0	93	RZM-MMC_D0	e-MMC Data Bus D0 (LSB)
P3.10	MMC_D1	P3_10/MMC_D1	89	RZM-MMC_D1	e-MMC Data Bus D1
P3.15	MMC_D2	P3_15/MMC_D2	99	RZM-MMC_D2	e-MMC Data Bus D2
P3.14	MMC_D3	P3_14/MMC_D3	64	RZM-MMC_D3	e-MMC Data Bus D3
P11.12	MMC_D4	P11_12/MMC_D4	187	RZM-MMC_D4	e-MMC Data Bus D4
P11.13	MMC_D5	P11_13/MMC_D5	191	RZM-MMC_D5	e-MMC Data Bus D5
P11.14	MMC_D6	P11_14/MMC_D6	185	RZM-MMC_D6	e-MMC Data Bus D6
P11.15	MMC_D7	P11_15/MMC_D7	193	RZM-MMC_D7	e-MMC Data Bus D7 (MSB)

With [8.16 - DIP Switch S1](#) set in the correct position and the e-MMC carefully partitioned and programmed, the YLCDRZA1H is capable of booting directly from this device.

8.5 - 10/100 Ethernet Port

The RZ/A1H has a full 10/100 Ethernet MAC with MII interface. The RZ Module brings these signals to the edge connector, and the YLCDRZA1H Baseboard delivers these signals interface through a Micrel KSZ8081MNX MII PHY to a standard RJ45 jack.



The MII interface is as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P0.5	GPO	P0_5-ET_RESET#	29	RZM-ET_RESET#	Holds PHY in reset (active low)
P1.5	IRQ5	P1_5/IRQ5-ET_IRQ	171	RZM-ET_IRQ	PHY Interrupt (active low)
P3.3	MDIO	P3_3/ET_MDIO	21	RZM-ET_MDIO	Management data I/O
P5.9	MDC	P5_9/ET_MDC	168	RZM-ET_MDC	Management data clock
P1.14	COL	P1_14/ET_COL	58	RZM-ET_COL	Collision detection
P2.3	CRS	P2_3/ET_CRS	121	RZM-ET_CRS	Carrier detection
P3.6	RXDV	P3_6/ET_RXDV	28	RZM-ET_RXDV	Receive data valid
P3.5	RXER	P3_5/ET_RXER	36	RZM-ET_RXER	Receive error
P3.4	RXCLK	P3_4/ET_RXCLK	40	RZM-ET_RXCLK	Receive clock
P2.8	RXD[0]	P2_8/ET_RXD0	137	RZM-ET_RXD0	Receive data 0 (LSB)
P2.9	RXD[1]	P2_9/ET_RXD1	118	RZM-ET_RXD1	Receive data 1
P2.10	RXD[2]	P2_10/ET_RXD2	122	RZM-ET_RXD2	Receive data 2
P2.11	RXD[3]	P2_11/ET_RXD3	131	RZM-ET_RXD3	Receive data 3 (MSB)
P2.0	TXCLK	P2_0/ET_TXCLK	80	RZM-ET_TXCLK	Transmit clock
P2.1	P2.1/ET_TXER	P2_1/ET_TXER	86	RZM-ET_TXER	Transmit Error or GPIO (unused on Baseboard)
P2.2	TXEN	P2_2/ET_TXEN	104	RZM-ET_TXEN	Transmit enable
P2.4	TXD[0]	P2_4/ET_TXD0	129	RZM-ET_TXD0	Transmit data 0 (LSB)
P2.5	TXD[1]	P2_5/ET_TXD1	110	RZM-ET_TXD1	Transmit data 1

P2.6	TXD[2]	P2_6/ET_TXD2	135	RZM-ET_TXD2	Transmit data 2
P2.7	TXD[3]	P2_7/ET_TXD3	120	RZM-ET_TXD3	Transmit data 3 (MSB)


In order to use the Ethernet interface, a globally unique 48-bit MAC address is required. Most companies purchase batches of thousands of these to assign to their devices. To simplify the demonstration of the YLCDRZA1H, the Baseboard includes a tiny I2C chip, the [Microchip 24AA02E48T](#), which contains a single unique MAC address that software can retrieve and use for the board:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x50	0xA1	0xA0	0	400	Baseboard	24AA02E48T EEPROM/MAC Address

8.6 - Audio Subsystem

One of the features of the Renesas RZ/A1 family is extensive support for external audio codecs for audio input/output. The YLCDRZA1H highlights this capability using the [Maxim MAX98089ETN+ Audio Codec/Amplifier](#), exposing:

- stereo line in jack (blue)
- stereo line out jack (green)
- stereo headphone and microphone mobile phone headset-style jack (black)
- stereo amplified bass-enhanced “B-Bass” speakers from [BeStar](#)



The codec is connected to the high performance full-duplex Serial Sound Interface (SSI) on the RZ MCU as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
		CLKAUDIO_24MHZ	67	RZM-AUDIO_CLK	24MHz Base Codec Clock from RZ Module
P1.9	IRQ3	P1_9/IRQ3-AUDIO_IRQ	63	RZM-AUDIO_IRQ	Audio Codec Interrupt
P10.12	SSICLK1	P10_12/SSISCK	108	RZM_SSISCK	Serial Sound Interface Clock
P10.13	SSIWS1	P10_13/SSIWS	133	RZM_SSIWS	Serial Sound Word Select
P10.15	SSITxD1	P10_15/SSITxD	112	RZM_SSITxD	Serial Sound Transmit Data (output)
P10.14	SSIRxD1	P10_14/SSIRxD	116	RZM_SSIRxD	Serial Sound Receive Data (input)

The Maxim codec is an I2C controlled device, appearing on I2C Bus 0 at 7-bit I2C address 0x20:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x10	0x21	0x20	0	400	Baseboard	MAX98089ETN+ Audio Codec/Amplifier

8.7 - Industrial Networking: CAN, RS232, RS485

The large green 3.5mm connector J13 delivers RS232, RS422, or RS485 as well as high performance CAN to external industrial networks. A screw terminal plug is supplied, enabling easy wiring of termination or daisy chained cabling. The connector's signals are clearly marked on the Baseboard PCB as follows:



Pin	Name	Description
1		No connection
2	GND	Ground
3	RS485_A	Receive non-inverting input
4	RS485_B	Receive inverting input
5	RS485_X	Transmit non-inverting output
6	RS485_Y	Transmit inverting output
7	CANH	CAN Transmit/Receive H
8	CANL	CAN Transmit/Receive L

There is no termination facility on the YLCDRZA1H; if cable termination is required insert a 75 ohm resistor across the appropriate signals at the screw-in connector.

Note that two additional UARTs and an additional CAN port are available on the [PMOD Port](#); only one of those UARTs is in a standard Digilent PMOD configuration however it is possible to create custom non-standard PMODs for that port and access these extra serial interfaces.

8.7.1 - RS232, RS433, and RS485

The YLCDRZA1H employs an [Intersil ISL41387IRZ-T](#) multi-protocol transceiver has the following key features:


- Selectable RS232 or RS485/RS422
- $\pm 15\text{kV}$ (HBM) ESD protected
- Single ended or differential
- Half or full duplex
- Large (2.7V) differential V_{OUT} for improved noise immunity in RS485/RS422 networks
- Full failsafe (open/short) RX in RS485/RS422 mode
- RS232 transmit rates up to 650kbps, receive rates to 2mbps
- RS485/RS422 data rates up to 20Mbps
- RS485/RS422 slew rate limit options for 460kbps and 115kbps

It is an excellent choice for many RS485 point-to-point and multi-drop networks and works particularly well in many industrial PLC configurations. The dual mode support enables, via the S4 DIP switch, RS232 instead of RS485 levels. Only one mode (RS232 or RS422/485) can be supported at any given time, and the mode is not software selectable – it is assumed that the installation process and environment determines which transmission standard is being connected.

The transceiver is connected to the MCU's UART as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P8.10	GP0	P8_10/RS_DEN	11	RZM-RS_DEN	Transmit Drive Enable (active high)
P8.11	GP0	P8_11/RS_ON	9	RZM-RS_ON	Transceiver Enable (active high)
P3.1	TxD2	P3_1/UART_TX	25	RZM_UART_TX	Transmit Data
P3.2	RxD2	P3_2/UART_RX	15	RZM_UART_RX	Receive Data

The DIP Switch S4 enables a variety of features on this port. The legend on the Baseboard PCB can help with these settings.

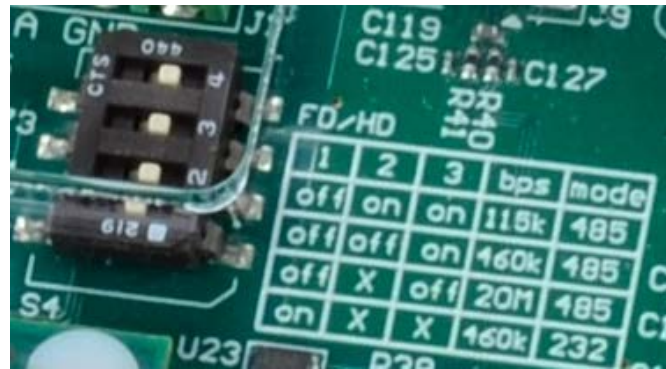

RS232 or RS422/RS485 Mode

DIP switch **S4.3** controls which standard the transceiver conforms to; setting this switch ON puts the transceiver in RS232 level mode; the switch OFF puts the transceiver in RS422/RS485 mode.

Slew Rate and Speed Limiting (RS422/RS485 only)

In RS422/485 mode, DIP switch **S4.1** and **S4.2** control the slew rate and speed limits respectively. Set these switches as slow as possible but adequate for the target network rate according to the table.

RSXXX Half/Full Duplex Selection

The RSXXX port can operate in full duplex mode where data can be independently and simultaneously flowing *in* the receive and *out* the transmit pins. It can also be configured to operate in half duplex mode where input/output data is often carried on the same wire(s) and the directionality takes turns.

The main difference between the modes lies in how the transmit and receive enable of the transceiver are configured and used. In full duplex mode, the transceiver receive data is always enabled and being processed by the RZ MCU. In half duplex mode, the receive data is only valid when not transmitting – this avoids receive MCU algorithms from “seeing” the same data that they send if the network shares the same wires for transmit and receive. Full duplex mode always implies separate network wires for transmit and receive. Even then, you may not want to always have your transmitter enabled – there are many custom networks where the “master” in a network owns one network wire (or pair in differential mode) and can broadcast at any time to the “slaves” whereas the slaves must share the return line according to some convention to avoid collisions.

Given the many possible combinations on custom networks, there are two key elements that need to be addressed:

1. Is the receiver always on, delivering data to the MCU’s UART all the time, or is the network wiring half duplex and the receiver disabled during transmission to avoid “seeing your own packets”?
2. Is the transmitter always on, or must it be only turned on when the UART transmits on the network?

Receive Enable: Full and Half Duplex Selection

DIP switch **S4.4** controls how the RSXXX transceiver’s *receiver* is enabled. When **S4.4** is OFF (full duplex mode), a weak pull-up on the RSXXX transceiver’s **RXEN** pin ensures that by default the RSXXX transceiver’s receiver is always enabled and delivering data to the MCU.

When **S4.4** is ON (half duplex mode), the RSXXX transceiver’s **RXEN** pin is connected to GND. In this mode, the RSXXX transceiver’s receive enable is controlled by its **RXEN#** which is connected to the opposite polarity **DEN** (drive enable) pin. In this configuration, whenever the transmitter is enabled, the receiver is disabled and the receive data “marks idle” with a weak pull-up.

Transmit Enable

The transceiver’s transmit drive enable (**DEN**) pin (when asserted/high) turns on the output drivers on the transceiver and presents UART transmit data onto the network. To avoid any network glitches on power-up, this is always held low (inactive) until the MCU explicitly asserts this signal active/high.

8.7.2 - CAN

The CAN transceiver on the YLCDRZA1H Baseboard is implemented with an Infineon [IFX1050GVIO](#) or similar device with the following specifications:

- ▶ CAN data transmission rate up to 1 Mbaud
- ▶ Suitable for 12V and 24V network applications
- ▶ Excellent EMC performance (very high immunity and very low emission)
- ▶ ISO/DIS 11898 compatible

The transceiver is connected to the MCU's CAN1 port as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P5.10	CAN1TX	P5_10/CAN1TX	170	RZM-CANTX	CAN Transmit Data
P1.4	CAN1RX	P1_4/CAN1RX	134	RZM_CANRX	CAN Receive Data

8.8 - SD Card Socket

The full sized SD Card socket on the Baseboard is connected directly to the MCU via the Renesas RZ/A1H's built-in SD Card controller, channel 0:



MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P4.13	SD_CMD_0	P4_13/SD_CMD	98	RZM-SD_CMD	SD Command/Response
P4.12	SD_CLK_0	P4_12/SD_CLK	96	RZM-SD_CLK	SD Clock
P4.8	SD_CD_0	P4_8/SD_CD	115	RZM-SD_CD	SD Card Detect (active low, pulled high)
P4.9	SD_WP_0	P4_9/SD_WP	84	RZM-SD_WP	SD Write Protect (active low, pulled high)
P4.11	SD_D0_0	P4_11/SD_D0	119	RZM-SD_D0	SD Data Bus D0 (LSB)
P4.10	SD_D1_0	P4_10/SD_D1	92	RZM-SD_D1	SD Data Bus D1
P4.15	SD_D2_0	P4_15/SD_D2	106	RZM-SD_D2	SD Data Bus D2
P4.14	SD_D3_0	P4_14/SD_D3	123	RZM-SD_D3	SD Data Bus D3 (MSB)

With [8.16 - DIP Switch S1](#) set in the correct position, and an SD Card correctly formatted inserted in the SD Card socket, the YLCDRZA1H is capable of booting directly from this device.

8.9 - USB Host and Device

The Renesas RZ/A1H MCU features independent USB 2.0 host and USB 2.0 device (or “function”) ports, both capable of 480mbps data rates.

The USB Device port is exposed via a standard USB Micro B connector on the YLCDRZA1H Baseboard and is connected to the MCU as follows:



MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
VBUSIN1		VBUSIN1	41	RZM-USBF_VBUS	USB Device (“Function”) VBUS Detect
DP_0		USBF_P	37	RZM-USBF_P	USB Device (“Function”) D+
DP_1		USBF_N	35	RZM-USBF_N	USB Device (“Function”) D-

The USB host port is exposed via a standard USB A connector on the YLCDRZA1H Baseboard, and is current limited to 150mA to prevent inappropriately large current devices from affecting the operation of the YLCDRZA1H system. See [Chapter 5.5 - USB Host Power Subsystem](#) for more information. The port is connected to the MCU as follows:

Port	MCU		Schematic		Operation
	Function	Module	#	Baseboard	
P1.6	see note	P1_6-USBH_5V_EN#	132	RZM-USBH_5V_EN#	USB Host VBUS Power Out Enable (active low)
				USBH_5V	USB Host VBUS Power Out
	VBUSIN0	VBUSIN0	43	RZM-USBH_VBUS	USB Host VBUS Detect
P1.12	TINT20/GPI	P1_12/TINT20-USBH_OC	56	RZM-USBH_OC#	USB Host VBUS Overcurrent Detect (active low)
	DP_1	USBH_P	47	RZM-USBH_P	USB Host D+
	DM_1	USBH_N	49	RZM-USBH_N	USB Host D-

¹on v2.0 units, P1.6 was incorrectly used to drive the USB Host Power Enable (RZM-USBH_5V_EN on the RZ Module; DIMM pin 132). This port is open drain only on the MCU, and is incapable of driving high and enabling the power supply. All v2.0 units should include a post-production modification connecting U21 pin 7 (ENUSB) to U21 pin 8 (FAULT#) to enable the USB supply during all non-overcurrent situations. Version 2.1 units have an inverter with input pull-up added to this path. In this configuration, the RESET# condition disables the USB Host Power Enable, and asserting P1_6 low enables the USB Host Power.

8.10 - Battery Backed Real Time Clock Calendar (RTCC)

The Renesas RZ/A1H MCU has a built-in Real Time Clock Calendar (RTCC), and the RZ Module provides a 32.768 kHz dedicated crystal to enable precise timekeeping while power is connected. Often network connected, systems can fetch the current time from the network on boot and program the MCU's RTCC to the correct time, which will be maintained for the duration of the powered session.

The Baseboard adds an extra feature: a separate lithium coin-cell backed I2C RTCC subsystem. The NXP PCF8523 RTCC requires less than a few hundred nano Amperes to operate and the small CR1025 3V 30mAH coin cell can keep the RTCC running for several years without replacement.



When replacing the battery, ensure correct orientation: the flat side (+) should be up and away from the PCB surface, and the rounded side (-) should be contacting the PCB surface.



The NXP RTCC is an I2C controlled device, appearing on I2C Bus 0 at 7-bit I2C address 0x68:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x68	0xD1	0xD0	0	1000	Baseboard	PCF8523 Real Time Clock Calendar

[Chapter 10 – I2C Device Summary](#) lists all the I2C devices on the YLCRZA1H.

YLCDRZA1H v2.1 Baseboards have an additional R/C circuit on the main power input as recommended by NXP to improve battery to main power switchover.

8.11 - PMOD Port

The YLCDRZA1H has one Digilent PMOD™ compatible 2x6 host port. It supports, depending on MCU configuration and software, one of these standard PMOD configurations:

- Type 1 - GPIO
- Type 2 - SPI
- Type 2A - Expanded SPI
- Type 4 - UART without CTS/RTS flow control
- Type 4A - Expanded UART without CTS/RTS flow control

For information on the PMOD convention, see the [Digilent](#) website, or [read the PMOD standard](#).



The PMOD port on the YLCDRZA1H also has some non-standard and unique features you can exploit with custom cards. Normally with PMOD mode 2/2A/4/4A support, you choose SPI or UART mode. The YLCDRZA1H's PMOD offers the following choices:

- SPI (standard pin-out mode 2/2A)
- UART (standard pin-out mode 4/4A)
- UART + CAN (both non-standard pin-out)
- UART + UART (one UART standard pin-out, one non-standard)

These ports do not have transceivers, are in addition and separate from the [Industrial Networking: CAN, RS232, RS485](#) ports which have full transceivers on the Baseboard.

With custom PMOD-like cards, or a simple wire harness from the YLCDRZA1H's PMOD connector, you can access this additional functionality. Contact Renesas for information about any example cards available.



Pay special attention to the pin order of the PMOD connectors: it is not the zigzag numbering convention normally used for headers. Incorrectly wiring to the PMOD connectors may damage your YLCDRZA1H or even other connected equipment.



The PMOD signals are 3.3V only. Do not connect 5V or higher signals, for example full-level RS232 signals, to this port directly. If, for example, a full-level RS232 port is desired the [Diligent PMOD RS232X](#) plugs into the connector and translates these voltages.

The PMOD connector signals are connected throughout the YLCDRZA1H as follows; the PMOD pin numbers are per the PMOD (non-zigzag) specification:

MCU		Schematic			PMOD Pin	Operation
Port	Function	Module	#	Baseboard		
				+3V3	12	+3.3V to PMOD
				GND	11	System GND
					10	NC
					9	NC
P3.7	GPIO	P3_7 - PMOD_RST#	30	RZM - PMOD_RST#	8	PMOD Reset Out (active low)
P1.11	TINT19/GPIO	P1_11/TINT19 - PMOD_IRQ	57	RZM - PMOD_IRQ	7	PMOD connector IRQ or GPIO
P8.14	GPIO/RXPCK2/TxD4	P8_14/RSPCK2	22	RZM_RSPCK2	4	PMOD SPI Clock or UART Tx
P9.1 P8.9	GPIO/MISO2/CAN0RX GPIO/RXD3/SPDIF_OUT	P9_1/MISO2-P8_9/RXD3	26	RZM_PMOD_RX	3	PMOD SPI Master In/Slave Out or CAN RX PMOD UART Rx or SPDIF OUT
P9.0 P8.8	GPIO/MOSI2/CAN0TX GPIO/TXD3/SPDIF_IN	P9_0/MOSI2-P8_8/TXD3	24	RZM_PMOD_TX	2	PMOD SPI Master Out/Slave In or CAN Tx PMOD UART Tx or SPDIF IN
P8.15	GPIO/SSL20/RxD4	P8_15/SSL20	20	RZM_SSL20	1	PMOD SPI Slave Select or UART Rx

Note how two pairs of MCU pins are joined and overlaid on the PMOD connector. This enables both the standard UART and SPI modes as well as other possibilities, including CAN, SPDIF, and a second UART.



Only enable one function per joined signal (e.g. P9.1 & P8.9) on the MCU to be an output to avoid damaging the MCU.

This table summarizes the configuration of the MCU pins for the various standard PMOD modes:

MCU Port	PMOD Pin	Standard PMOD Configuration for Mode				
		1A GPIO	4A UART	4B XUART	2A SPI	2B XSPI
P3.7	8	GPIO		GP0		GP0
P1.11	7	GPIO/TINT19		TINT19		TINT19
P8.14	4	GPIO	GP0/RTS#	GP0/RTS#	RXPCK2	RXPCK2
P9.1	3	GPIO	RxD3	RxD3	MISO2	MISO2
P8.9		GPIO				
P9.0	2	GPIO	TxD3	TxD3	MOSI2	MOSI2
P8.8		GPIO				
P8.15	1	GPIO	GPI/CTS#	GPI/CTS#	SSL20/GP0	SSL20/GPIO

This table summarizes the configuration of the MCU pins for the various non-standard PMOD modes:

MCU Port	PMOD Pin	Non-Standard PMOD Configuration for Mode					
		CAN GPIO	CAN UART	UART GPIO	UART UART	SPDIF GPIO	UART SPDIF
P3.7	8	GPIO/TINT47	GPIO/TINT47	GPIO/TINT47	GPIO/TINT47	GPIO/TINT47	GPIO/TINT47
P1.11	7	GPIO/TINT19	GPIO/TINT19	GPIO/TINT19	GPIO/TINT19	GPIO/TINT19	GPIO/TINT19
P8.14	4	TxD4	TxD4	TxD4	TxD4		TxD4
P9.1	3	CAN0RX	CAN0RX	GPIO/TINT132			
P8.9					RxD3	SPDIF_OUT	SPDIF_OUT
P9.0	2	CAN0TX	CAN0TX	GPIO/TINT131			
P8.8					TxD3	SPDIF_IN	SPDIF_IN
P8.15	1	RxD4	RxD4	TxD4	TxD4		TxD4

8.12 - Segger J-Link On-Board Debugger/Programmer

The YLCDRZA1H Baseboard includes a Segger J-Link On-Board debugger/programmer to enable easy and effective software development without the need for an external programmer/debugger. The USB Micro connector near the barrel power jack is the PC's connection point for this debugger – see [Chapter 3 – Getting Started, Section 3.3 - Connecting to the Segger J-Link On-Board Debugger](#). The debugger is connected directly to the MCU:



MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
JP0_1	TDO	TDO	81	RZM-TDO	JTAG test data out
TCK	TCK	TCK	85	RZM-TCK	JTAG test clock
JP0_0	TDI	TDI	79	RZM-TDI	JTAG test data In
TMS	TMS	TMS	83	RZM-TMS	JTAG test mode select
TRST	TRST	TRST#	77	RZM-TRST#	JTAG test reset (active low)
RES	RES	RESET#	27	RZM-RESET#	System Reset (open drain, active low) Also RESET Pushbutton S3 on Baseboard

Details of this circuit are the proprietary and confidential property of SEGGER Microcontroller GmbH & Co. KG, and can only be implemented under license from Segger; [contact Segger](#) for details.

The Baseboard's LED2 green element is controlled directly by the Segger J-Link On-Board and flashes to indicate activity on the debugger.

8.13 - Ambient Light Sensor

In low-light conditions, the LCD can be so bright it can visually “bloom” and difficult to read. As in mobile phones and tablets, the YLCDRZA1H includes a forward-facing through-glass ambient light sensor, enabling software to monitor the ambient light conditions and dynamically adjust the LCD backlight intensity.

The Avago APDS-9002-021 Ambient Light Sensor (ALS) is a simple device that outputs a current proportional to the ambient light conditions. Through a resistor, this appears as a voltage between 0 and 3.3V on an Analog to Digital Converter (ADC) input on the MCU. Software can poll this ADC periodically. The ALS is connected as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P1.8	AN0	P1_8/AN0_ALS	53	RZM-AN0_ALS	Ambient light sensor analog input

8.14 - Digital Video Camera

A forward-facing VGA (640x480) color digital video camera module based on the popular OmniVision OV7670 smart sensor is included in the YLCDRZA1H.

The video data is moved over a dedicated high speed parallel video data channel. Operation and features of the camera are controlled over I2C.

The camera module is connected as follows:



MCU		Schematic			Operation
Port	Function	Module	DIMM	Baseboard	
P10.0	VI0_CLK	P10_0/VI0_CLK	32	RZM-VI0_CLK	Camera CLK
P10.1	VI0_VD	P10_1/VI0_VSYNC	19	RZM-VI0_VSYNC	Camera Vertical Sync
P10.2	VI0_HD	P10_2/VI0_HSYNC	17	RZM-VI0_HSYNC	Camera Horizontal Sync
P10.3	VI0_FLD	P10_3/VI0_FLD	38	RZM-VI0_FLD	Camera FLD
P10.4	VI0_D0	P10_4/VI0_D0	109	RZM-VI0_D0	Camera D0 (LSB)
P10.5	VI0_D1	P10_5/VI0_D1	107	RZM-VI0_D1	Camera D1
P10.6	VI0_D2	P10_6/VI0_D2	72	RZM-VI0_D2	Camera D2
P10.7	VI0_D3	P10_7/VI0_D3	76	RZM-VI0_D3	Camera D3
P10.8	VI0_D4	P10_8/VI0_D4	90	RZM-VI0_D4	Camera D4
P10.9	VI0_D5	P10_9/VI0_D5	127	RZM-VI0_D5	Camera D5
P10.10	VI0_D6	P10_10/VI0_D6	94	RZM-VI0_D6	Camera D6
P10.11	VI0_D7	P10_11/VI0_D7	117	RZM-VI0_D7	Camera D7 (MSB)
P1.0	P1.0/SCL0	P1_0/SCL0	126	RZM-SCL0	I2C0 Clock
P1.0	P1.1/SDA0	P1_1/SDA0	128	RZM-SDA0	I2C0 Data

The OV7670 I2C communication protocol is described in detail in the [OmniVision Serial Camera Control Bus \(SCCB\) Functional Specification](#), and is present on I2C bus 0 at 7-bit address 0x21:

Address			I2C Bus	Max kHz	Location	Device
7-bit	Read	Write				
0x21	0x43	0x42	0	400	Baseboard	OV7670 Camera Module

See [Chapter 10 – I2C Device Summary](#) for a complete list of I2C Devices on the YLCDRZA1H.

8.15 - Switches

The baseboard has two pushbuttons and two 4-position DIP switches for selecting YLCDRZA1H features:

Switch	Type	Purpose
S1	4 Switch DIP Slide	MCU Boot Mode and Spread Spectrum Clocking
S2	NOMC SPST Pushbutton	User Input
S3	NOMC SPST Pushbutton	System Reset when pressed
S4	4 Switch DIP Slide	RS232/485 Transceiver Options

DIP Switch S1 controls the MCU boot modes and spread spectrum clocking. See [Chapter 7.3 - MCU Boot Mode Selection](#) and [Chapter 7.6 - On-Module Clocking](#).

DIP Switch S4 controls various RS232/485 transceiver capabilities: See [Chapter 8.7 - Industrial Networking: CAN, RS232, RS485](#).

S2 is a simple GPIO/Interrupt input into the MCU, and can be used by software for any user-input purpose. S3 is connected to the system RESET# line, debounced and managed on the RZ Module as described in [7.2 - System Reset](#). They are connected as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P7.8	GPI/IRQ1	P7_8/IRQ1	195	RZM-P7_8/IRQ1	Baseboard Pushbutton S2 (active low w/ IRQ)
RES	RES	RESET#	27	RZM-RESET#	System Reset (open drain, active low) Also RESET Pushbutton S3 on Baseboard

8.16 - LEDs

The Baseboard has two tri-color LEDs (red, green, orange=red+green):

LED	Green	Red
LED1	Software P3.9 (active high)	Software P3.8 (active high)
LED2	Segger J-Link Activity	Baseboard Power Present

LED1 is connected as follows:

MCU		Schematic			Operation
Port	Function	Module	DIMM	Baseboard	
P3.8	P3.8	P3_8-RZM_LED_RED	71	RZM-LED_RED	Baseboard LED1 Red element (active high)
P3.9	P3.9	P3_9-RZM_LED_GRN	65	RZM-LED_GRN	Baseboard LED1 Green element (active high)

8.17 - CryptoAuthentication

The YLCDRZA1H Baseboard includes an Atmel ATSHA204A CryptoAuthentication Chip, which includes 4.5kbit EEPROM and a Random Number Generator (RNG).



The encryption key OTP area within the 4.5kbit EEPROM is pre-programmed by Serious Integrated Inc. for support of the [Serious Human Interface™ Platform \(SHIP\)](#) and is unavailable for other uses. Modifying or writing to this area will permanently remove your ability to use SHIP on the YLCDRZA1H.

The chip appears on I2C bus 0 at 7-bit address 0x64:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x64	0xC9	0xC8	0	1000	Baseboard	ATSHA204A Crypto + RNG + EEPROM

Consult the [Atmel ATSHA204 Data Sheet](#) for programming and hardware information of the ATSHA204 device.

Chapter 9 – External Interrupt Summary

Port	MCU	Schematic			Operation
	Function	Module	#	Baseboard	
	IRQ0				
P7.8	IRQ1/GPIO	P7_8/IRQ1	195	RZM-P7_8/IRQ1	Baseboard Pushbutton S2 (active low w/IRQ)
	IRQ2				
P1.9	IRQ3	P1_9_IRQ-AUDIO_IRQ	63	RZM-AUDIO_IRQ	Audio System
P1.10	IRQ4	P1_10/IRQ4-TOUCH_IRQ	52	RZM-TOUCH_IRQ	LCD Touch controller
P1.5	IRQ5	P1_5/IRQ5-ET_IRQ	171	RZM-ET_IRQ	Ethernet PHY (WOL)
	IRQ6				
	IRQ7				
P1.11	TINT19/GPIO	P1_11/TINT19-PMOD_IRQ	57	RZM-PMOD_IRQ	PMOD connector IRQ or GPIO
P1.12	TINT20/GPI	P1_12/TINT20-USBH_OC	56	RZM-USBH_OC#	USB host overcurrent

Chapter 10 – I2C Device Summary

The two I2C interfaces on the YLCDRZA1H are as follows:

Port	MCU	Schematic			Operation
	Function	Module	DIMM	Baseboard	
P1.0	SCL0	P1_0/SCL0	126	RZM-SCL0	I2C0 Clock
P1.1	SDA0	P1_1/SDA0	128	RZM-SDA0	I2C0 Data
P1.2	P1.2/SCL1	P1_2/SCL1	165	RZM-SCL1	I2C1 Clock (Touch dedicated)
P1.3	P1.3/SDA1	P1_3/SDA1	169	RZM-SDA1	I2C1 Data (Touch dedicated)

The devices on these channels are as follows:

7-bit	Address		I2C Bus	Max kHz	Location	Device
	Read	Write				
0x10	0x21	0x20	0	400	Baseboard	MAX98089ETN+ Audio Codec/Amplifier
0x21	0x43	0x42	0	400	Baseboard	OV7670 Camera Module
0x50	0xA1	0xA0	0	400	Baseboard	24AA02E48T EEPROM/MAC Address
0x57	0xAD	0xAC	0	400	Module	CAT34C02 EEPROM
0x60	0xC1	0xC0	0	400	Module	Si5351C Clock Synthesizer
0x64	0xC9	0xC8	0	1000	Baseboard	ATSHA204A Crypto + RNG + EEPROM
0x68	0xD1	0xD0	0	1000	Baseboard	PCF8523 Real Time Clock Calendar
0x5C	0xB9	0xB8	1	400	LCD	Pixcir C48 Capacitive Touch Controller

Chapter 11 – SPI Device Summary

The SPI interfaces on the YLCDRZA1H are as follows:

MCU		Schematic			Operation
Port	Function	Module	#	Baseboard	
P9.2	SPBCLK0	P9_2/SPBCLK0	166	RZM-SPBCLK0	XIP/Boot Serial FLASH Clock
P9.3	SPBSSL0	P9_3/SPBSSL0	174	RZM-SPBSSL0	XIP/Boot Serial FLASH SSL#
P9.4	SPBI000	P9_4/SPBI000	178	RZM-SPBI000	XIP Lo/Boot Serial FLASH Data 0/MOSI
P9.5	SPBI010	P9_5/SPBI010	173	RZM-SPBI010	XIP Lo/Boot Serial FLASH Data 1/MISO
P9.6	SPBI020	P9_6/SPBI020			XIP Lo/Boot Serial FLASH Data 2
P9.7	SPBI030	P9_7/SPBI030			XIP Lo/Boot Serial FLASH Data 3
P2.12	SPBI001	P2_12/SPBI001	178	RZM-SPBI001	XIP Hi Serial FLASH Data 0
P2.13	SPBI011	P2_13/SPBI011	173	RZM-SPBI011	XIP Hi XIP Serial FLASH Data 1
P2.14	SPBI021	P2_14/SPBI021			XIP Hi XIP Serial FLASH Data 2
P2.15	SPBI031	P2_15/SPBI031			XIP Hi XIP Serial FLASH Data 3

The devices on these interfaces are:

Slave Select	SPI Bus	Max MHz	Location	Device
P9_3/SPBSSL0	0		Module	Both Serial FLASH Devices

Chapter 12 - Schematics & Bills of Materials

12.1 - SO-DIMM Detail

The SO-DIMM socket on the YLCDRZA1H Baseboard is an inexpensive and readily-available [TE 1473005-4](#) 200Pos 0.6mm pitch socket. Designers can make their own baseboards and reuse the RZ Module as a time-to-prototype vehicle. The DIMM socket has the following pin-out:


Port	MCU		Schematic		Operation
	Function	Module	#	Baseboard	
		GND	1	GND	System Ground
		+5V	2	+5V	System +5V Main Supply
P11.8	LCD0_TCON6	P11_8/LCD_DEN	3	RZM-LCD_DEN	LCD Data Enable
P11.7	LCD_DATA0	P11_7/LCD_DATA0	4	RZM-LCD_DATA0	LCD Blue 0 (LSB)
P11.9	LCD0_TCON5	P11_9/LCD_VSYNC	5	RZM-LCD_VSYNC	LCD Vertical Sync
P11.6	LCD_DATA1	P11_6/LCD_DATA1	6	RZM-LCD_DATA1	LCD Blue 1
P8.13	GPIO	P8_13-TOUCH_RST#	7	RZM-TOUCH_RST#	LCD Touch controller reset (active low)
P11.10	LCD0_TCON4	P11_10/LCD_HSYNC	8	RZM-LCD_HSYNC	LCD Horizontal Sync
P8.11	GP0	P8_11/RS_ON	9	RZM-RS_ON	RSXXX Transceiver Enable (active high)
	CKIO	CKIO	10	RZM-CKIO	MCU System Clock Out (unused on Baseboard)
P8.10	GP0	P8_10/RS_DEN	11	RZM-RS_DEN	RSXXX Transmit Drive Enable (active high)
P8.8	GPIO/TXD3/SPDIF_IN	P9_0/MOSI2-P8_8/TXD3	12	RZM_PMOD_TX	PMOD UART Tx or SPDIF IN
		GND	13	GND	System Ground
		+5V	14	+5V	System +5V Main Supply
P3.2	RxD2	P3_2/UART_RX	15	RZM-UART_RX	RSXXX Receive Data
P8.9	GPIO/RXD3/SPDIF_OUT	P9_1/MISO2-P8_9/RXD3	16	RZM_PMOD_RX	PMOD UART Rx or SPDIF OUT
P10.2	VIO_HD	P10_2/VIO_HSYNC	17	RZM-VIO_HSYNC	Camera Horizontal Sync
P8.12	PWM1E	P8_12/PWM1E-BLEN	18	RZM-BLEN	LCD Backlight Enable (active high)
P10.1	VIO_VD	P10_1/VIO_VSYNC	19	RZM-VIO_VSYNC	Camera Vertical Sync
P8.15	GPIO/SSL20/RxD4	P8_15/SSL20	20	RZM_SSL20	PMOD SPI Slave Select or UART Rx
P3.3	MDIO	P3_3/ET_MDIO	21	RZM-ET_MDIO	MII Management data I/O
P8.14	GPIO/RXPCK2/TxD4	P8_14/RSPCK2	22	RZM-RSPCK2	PMOD SPI Clock or UART Tx
P3.0	LCD0_CLK	P3_0/LCD_CLK	23	RZM-LCD_CLK	Dot Clock
P9.0	GPIO/MOSI2/CAN0TX	P9_0/MOSI2-P8_8/TXD3	24	RZM_PMOD_TX	PMOD SPI Master Out/Slave In or CAN Tx
P3.1	TxD2	P3_1/UART_TX	25	RZM_UART_TX	RSXXX Transmit Data
P9.1	GPIO/MISO2/CAN0RX	P9_1/MISO2-P8_9/RXD3	26	RZM_PMOD_RX	PMOD SPI Master In/Slave Out or CAN RX
	RES	RESET#	27	RZM-RESET#	System Reset (open drain, active low) Also RESET Pushbutton S3 on Baseboard
P3.6	RXDV	P3_6/ET_RXDV	28	RZM-ET_RXDV	MII Receive data valid
P0.5	GP0	P0_5-ET_RESET#	29	RZM-ET_RESET#	MII PHY Reset (active low)
P3.7	GPIO	P3_7-PMOD_RST#	30	RZM-PMOD_RST#	PMOD Reset Out (active low)
P0.4	GP0	P0_4-MMC_RST#	31	RZM-MMC_RST	MMC Reset (active low with pull-up)
P10.0	VIO_CLK	P10_0/VIO_CLK	32	RZM-VIO_CLK	Camera CLK
		GND	33	GND	System Ground
		+5V	34	+5V	System +5V Main Supply
	DP_1	USBF_N	35	RZM-USBF_N	USB Device ("Function") D-
P3.5	RXER	P3_5/ET_RXER	36	RZM-ET_RXER	MII Receive error
	DP_0	USBF_P	37	RZM-USBF_P	USB Device ("Function") D+
P10.3	VIO_FLD	P10_3/VIO_FLD	38	RZM-VIO_FLD	Camera FLD
		GND	39	GND	System Ground
P3.4	RXCLK	P3_4/ET_RXCLK	40	RZM-ET_RXCLK	MII Receive Clock
	VBUSIN1	VBUSIN1	41	RZM-USBF_VBUS	USB Device ("Function") VBUS Detect
		+3V3	42	RZM_3V3	+3.3V Module Supply Out (unconnected on Baseboard)
	VBUSIN0	VBUSIN0	43	RZM-USBH_VBUS	USBH Power Detection (active high)
			44		unconnected/reserved


MCU		Schematic		Operation	
		GND	45	GND	System Ground
			46		unconnected/reserved
	DP_1	USBH_P	47	RZM-USBH_P	USB Host D+
		+5V	48	+5V	System +5V Main Supply
	DM_1	USBH_N	49	RZM-USBH_N	USB Host D-
			50		unconnected/reserved
		GND	51	GND	System Ground
P1.10	IRQ4	P1_10/IRQ4-TOUCH_IRQ	52	RZM-TOUCH_IRQ	LCD Touch controller interrupt
P1.8	AN0	P1_8/AN0_ALS	53	RZM-AN0_ALS	Ambient light sensor analog input
P1.15	GPIO	P1_15-LCD_ON	54	RZM-P1_15	(unused on Baseboard, input only signal)
P1.13	GPIO	P1_13-USBH_5V_EN	55	RZM-P1_13	(unused on Baseboard, input only signal)
P1.12	TINT20/GPIO	P1_12/TINT20-USBH_OC	56	RZM_USBH_OC#	USB Host VBUS Overcurrent Detect (active low)
P1.11	TINT19/GPIO	P1_11/TINT19-PMOD_IRQ	57	RZM-PMOD_IRQ	PMOD connector IRQ or GPIO
P1.14	COL	P1_14/ET_COL	58	RZM-ET_COL	MII Collision detection
		GND	59	GND	System Ground
		+5V	60	+5V	System +5V Main Supply
P0.1	MD_BOOT1	P0_1/MD_BOOT1	61	RZM-B00T1	MCU Boot Mode
P1.9	IRQ3	P1_9/IRQ3-AUDIO_IRQ	63	RZM-AUDIO_IRQ	Audio Codec Interrupt
			62		unconnected/reserved
P1.9	IRQ3	P1_9_IRQ-AUDIO_IRQ	63	RZM-AUDIO_IRQ	Audio System
P3.14	MMC_D3	P3_14/MMC_D3	64	RZM-MMC_D3	e-MMC Data Bus D3
P3.9	P3.9	P3_9-RZM_LED_GRN	65	RZM-LED_GRN	Baseboard LED1 Green element (active high)
P4.1	LCD_DATA9	P4_1/LCD_DATA9	66	RZM-LCD_DATA9	LCD Green 1
		CLKAUDIO_24MHZ	67	RZM-AUDIO_CLK	24MHz Base Codec Clock from RZ Module
P4.2	LCD_DATA10	P4_2/LCD_DATA10	68	RZM-LCD_DATA10	LCD Green 2
			69		unconnected/reserved
P4.3	LCD_DATA11	P4_3/LCD_DATA11	70	RZM-LCD_DATA11	LCD Green 3
P3.8	P3.8	P3_8-RZM_LED_RED	71	RZM-LED_RED	Baseboard LED1 Red element (active high)
P3.8	P3.8	P3_8-RZM_LED_RED	71	RZM-LED_RED	Baseboard LED1 Red element (active high)
P10.6	VIO_D2	P10_6/VIO_D2	72	RZM-VIO_D2	Camera D2
			73		unconnected/reserved
		+5V	74	+5V	System +5V Main Supply
		GND	75	GND	System Ground
P10.7	VIO_D3	P10_7/VIO_D3	76	RZM-VIO_D3	Camera D3
	TRST	TRST#	77	RZM-TRST#	JTAG test reset (active low)
P4.5	LCD_DATA13	P4_5/LCD_DATA13	78	RZM-LCD_DATA13	LCD Green 5
JP0.0	TDI	TDI	79	RZM-TDI	JTAG test data In
P2.0	TXCLK	P2_0/ET_TXCLK	80	RZM-ET_TXCLK	Transmit Clock
JP0.1	TDO	TDO	81	RZM-TDO	JTAG test data out
P4.6	LCD_DATA14	P4_6/LCD_DATA14	82	RZM-LCD_DATA14	LCD Green 6
	TMS	TMS	83	RZM-TMS	JTAG test mode select
P4.9	SD_WP_0	P4_9/SD_WP	84	RZM-SD_WP	SD Write Protect (active low, pulled high)
	TCK	TCK	85	RZM-TCK	JTAG test clock
P2.1	P2.1/ET_TXER	P2_1/ET_TXER	86	RZM-ET_TXER	MII Transmit Error or GPIO (unused on Baseboard)
		GND	87	GND	System Ground
		+5V	88	+5V	System +5V Main Supply
P3.10	MMC_D1	P3_10/MMC_D1	89	RZM-MMC_D1	e-MMC Data Bus D1
P10.8	VIO_D4	P10_8/VIO_D4	90	RZM-VIO_D4	Camera D4
P3.12	MMC_CLK	P3_12/MMC_CLK	91	RZM-MMC_CLK	MMC clock
P4.10	SD_D1_0	P4_10/SD_D1	92	RZM-SD_D1	SD Data Bus D1
P3.11	MMC_D0	P3_11/MMC_D0	93	RZM-MMC_D0	e-MMC Data Bus D0 (LSB)
P10.10	VIO_D6	P10_10/VIO_D6	94	RZM-VIO_D6	Camera D6
		GND	95	GND	System Ground
P4.12	SD_CLK_0	P4_12/SD_CLK	96	RZM-SD_CLK	SD Clock
P3.13	MMC_CMD	P3_13/MMC_CMD	97	RZM-MMC_CMD	MMC Command/response


MCU		Schematic		Operation	
P4.13	SD_CMD_0	P4_13/SD_CMD	98	RZM-SD_CMD	SD Command/Response
P3.15	MMC_D2	P3_15/MMC_D2	99	RZM-MMC_D2	e-MMC Data Bus D2
		+5V	100	+5V	System +5V Main Supply
		GND	101	GND	System Ground
		+5V	102	+5V	System +5V Main Supply
P4.0	LCD_DATA8	P4_0/LCD_DATA8	103	RZM-LCD_DATA8	LCD Green 0 (LSB)
P2.2	TXEN	P2_2/ET_TXEN	104	RZM-ET_TXEN	MII Transmit Enable
P4.4	LCD_DATA12	P4_4/LCD_DATA12	105	RZM-LCD_DATA12	LCD Green 4
P4.15	SD_D2_0	P4_15/SD_D2	106	RZM-SD_D2	SD Data Bus D2
P10.5	VI0_D1	P10_5/VI0_D1	107	RZM-VI0_D1	Camera D1
P10.1 2	SSICLK1	P10_12/SSISCK	108	RZM_SSISCK	Serial Sound Interface Clock
P10.4	VI0_D0	P10_4/VI0_D0	109	RZM-VI0_D0	Camera D0 (LSB)
P2.5	TXD[1]	P2_5/ET_TXD1	110	RZM-ET_TXD1	MII Transmit Data 1
P4.7	LCD_DATA15	P4_7/LCD_DATA15	111	RZM-LCD_DATA15	LCD Green 7 (MSB)
P10.1 5	SSITxD1	P10_15/SSITxD	112	RZM_SSITxD	Serial Sound Transmit Data (output)
		GND	113	GND	System Ground
		+5V	114	+5V	System +5V Main Supply
P4.8	SD_CD_0	P4_8/SD_CD	115	RZM-SD_CD	SD Card Detect (active low, pulled high)
P10.1 4	SSIRxD1	P10_14/SSIRxD	116	RZM_SSIRxD	Serial Sound Receive Data (input)
P10.1 1	VI0_D7	P10_11/VI0_D7	117	RZM-VI0_D7	Camera D7 (MSB)
P2.9	RXD[1]	P2_9/ET_RXD1	118	RZM-ET_RXD1	MII Receive Data 1
P4.11	SD_D0_0	P4_11/SD_D0	119	RZM-SD_D0	SD Data Bus D0 (LSB)
P2.7	TXD[3]	P2_7/ET_TXD3	120	RZM-ET_TXD3	MII Transmit Data 3 (MSB)
P2.3	CRS	P2_3/ET_CRS	121	RZM-ET_CRS	Carrier detection
P2.10	RXD[2]	P2_10/ET_RXD2	122	RZM-ET_RXD2	MII Receive Data 2
P4.14	SD_D3_0	P4_14/SD_D3	123	RZM-SD_D3	SD Data Bus D3 (MSB)
			124		unconnected/reserved
		GND	125	GND	System Ground
P1.0	SCL0	P1_0/SCL0	126	RZM-SCL0	I2C0 Clock
P10.9	VI0_D5	P10_9/VI0_D5	127	RZM-VI0_D5	Camera D5
P1.1	SDA0	P1_1/SDA0	128	RZM-SDA0	I2C0 Data
P2.4	TXD[0]	P2_4/ET_TXD0	129	RZM-ET_TXD0	MII Transmit Data 0 (LSB)
		+5V	130	+5V	System +5V Main Supply
P2.11	RXD[3]	P2_11/ET_RXD3	131	RZM-ET_RXD3	MII Receive Data 3 (MSB)
P1.6	P1.6/SCL3	P1_6/SCL3	132	RZM- USBH_5V_EN#	See 5.5 - USB Host Power Subsystem
P10.1 3	SSIWS1	P10_13/SSIWS	133	RZM_SSIWS	Serial Sound Word Select
P1.4	CAN1RX	P1_4/CAN1RX	134	RZM_CANRX	CAN Receive Data
P2.6	TXD[2]	P2_6/ET_TXD2	135	RZM-ET_TXD2	MII Transmit Data 2
P1.7	P1.7/SDA3	P1_7/SDA3	136	RZM-P1_7	(unused on Baseboard)
P2.8	RXD[0]	P2_8/ET_RXD0	137	RZM-ET_RXD0	MII Receive Data 0 (LSB)
		+5V	138	+5V	System +5V Main Supply
		GND	139	GND	System Ground
		GND	140	GND	System Ground
		GND	141	GND	System Ground
P5.0	LCD_DATA16	P5_0/LCD_DATA16	142	RZM-LCD_DATA16	LCD Red 0 (LSB)
		GND	143		System Ground
P5.1	LCD_DATA17	P5_1/LCD_DATA17	144	RZM-LCD_DATA17	LCD Red 1
		GND	145	GND	System Ground
		GND	146	GND	System Ground
		GND	147	GND	System Ground
P5.4	LCD_DATA20	P5_4/LCD_DATA20	148	RZM-LCD_DATA20	LCD Red 4
		GND	149	GND	System Ground
P5.5	LCD_DATA21	P5_5/LCD_DATA21	150	RZM-LCD_DATA21	LCD Red 5
		GND	151	GND	System Ground
		GND	152	GND	System Ground
		GND	153	GND	System Ground


MCU		Schematic		Operation	
P5.2	LCD_DATA18	P5_2/LCD_DATA18	154	RZM-LCD_DATA18	LCD Red 2
		GND	155	GND	System Ground
P5.3	LCD_DATA19	P5_3/LCD_DATA19	156	RZM-LCD_DATA19	LCD Red 3
		GND	157	GND	System Ground
		GND	158	GND	System Ground
		GND	159	GND	System Ground
P5.6	LCD_DATA22	P5_6/LCD_DATA22	160	RZM-LCD_DATA22	LCD Red 6
		GND	161	GND	System Ground
P5.7	LCD_DATA23	P5_7/LCD_DATA23	162	RZM-LCD_DATA23	LCD Red 7 (MSB)
		GND	163	GND	System Ground
		GND	164	GND	System Ground
		P1_2/SCL1	165	RZM-SCL1	Touch dedicated I2C1 Clock
P9.2	SPBCLK0	P9_2/SPBCLK0	166	RZM-SPBCLK0	Serial FLASH Clock
		GND	167	GND	System Ground
P5.9	MDC	P5_9/ET_MDC	168	RZM-ET_MDC	Management data clock
		P1_3/SDA1	169	RZM-SDA1	Touch dedicated I2C1 Data
P5.10	CAN1TX	P5_10/CAN1TX	170	RZM-CANTX	CAN Transmit Data
P1.5	IRQ5	P1_5/IRQ5-ET_IRQ	171	RZM-ET_IRQ	PHY Interrupt (active low)
		GND	172	GND	System Ground
P9.5	SPBI010	P9_5/SPBI010	173	RZM-SPBI010	Serial FLASH MISO
P9.3	SPBSSL0	P9_3/SPBSSL0	174	RZM-SPBSSL0	Serial FLASH SSL#
P11.1	LCD_DATA6	P11_1/LCD_DATA6	175	RZM-LCD_DATA6	LCD Blue 6
P0.3	MD_CLKS/GPIO	P0_3/MD_CLKS	176	RZM-SSCG	Enables Spread Spectrum Clocking in MCU by Baseboard S1.2 (ON/active GND, OFF pulled high (4.7kΩ) on RZ Baseboard)
P11.3	LCD_DATA4	P11_3/LCD_DATA4	177	RZM-LCD_DATA4	LCD Blue 4
P9.4	SPBI000	P9_4/SPBI000	178	RZM-SPBI000	Serial FLASH MOSI
P7.0	MD_BOOT2	P7_0/MD_BOOT2	179	RZM-BOOT2	MCU Boot Mode
			180		unconnected/reserved
P11.7	LCD_DATA0	P11_7/LCD_DATA0	181	RZM-LCD_DATA7	LCD Blue 7 (MSB)
			182		unconnected/reserved
P11.2	LCD_DATA5	P11_2/LCD_DATA5	183	RZM-LCD_DATA5	LCD Blue 5
			184		unconnected/reserved
P11.1 4	MMC_D6	P11_14/MMC_D6	185	RZM-MMC_D6	e-MMC Data Bus D6
			186		unconnected/reserved
P11.1 2	MMC_D4	P11_12/MMC_D4	187	RZM-MMC_D4	e-MMC Data Bus D4
			188		unconnected/reserved
		GND	189	GND	System Ground
P11.1 3	MMC_D5	P11_13/MMC_D5	191	RZM-MMC_D5	e-MMC Data Bus D5
			192		unconnected/reserved
			193		e-MMC Data Bus D7 (MSB)
P11.1 5	MMC_D7	P11_15/MMC_D7	194		unconnected/reserved
			195	RZM-P7_8/IRQ1	Baseboard Pushbutton S2 (active low w/IRQ)
P7.8	P7.8/IRQ1	P7_8/IRQ1	196		unconnected/reserved
			197	RZM-LCD_DATA3	LCD Blue 3
P11.4	LCD_DATA3	P11_4/LCD_DATA3	198		unconnected/reserved
			199	RZM-LCD_DATA2	LCD Blue 2
P11.5	LCD_DATA2	P11_5/LCD_DATA2	200	PWRDWN#	Power Down RZ Module (unconnected on Baseboard, active low)
		PWRDWN#	200	PWRDWN#	

12.2 - RZ Module Schematics

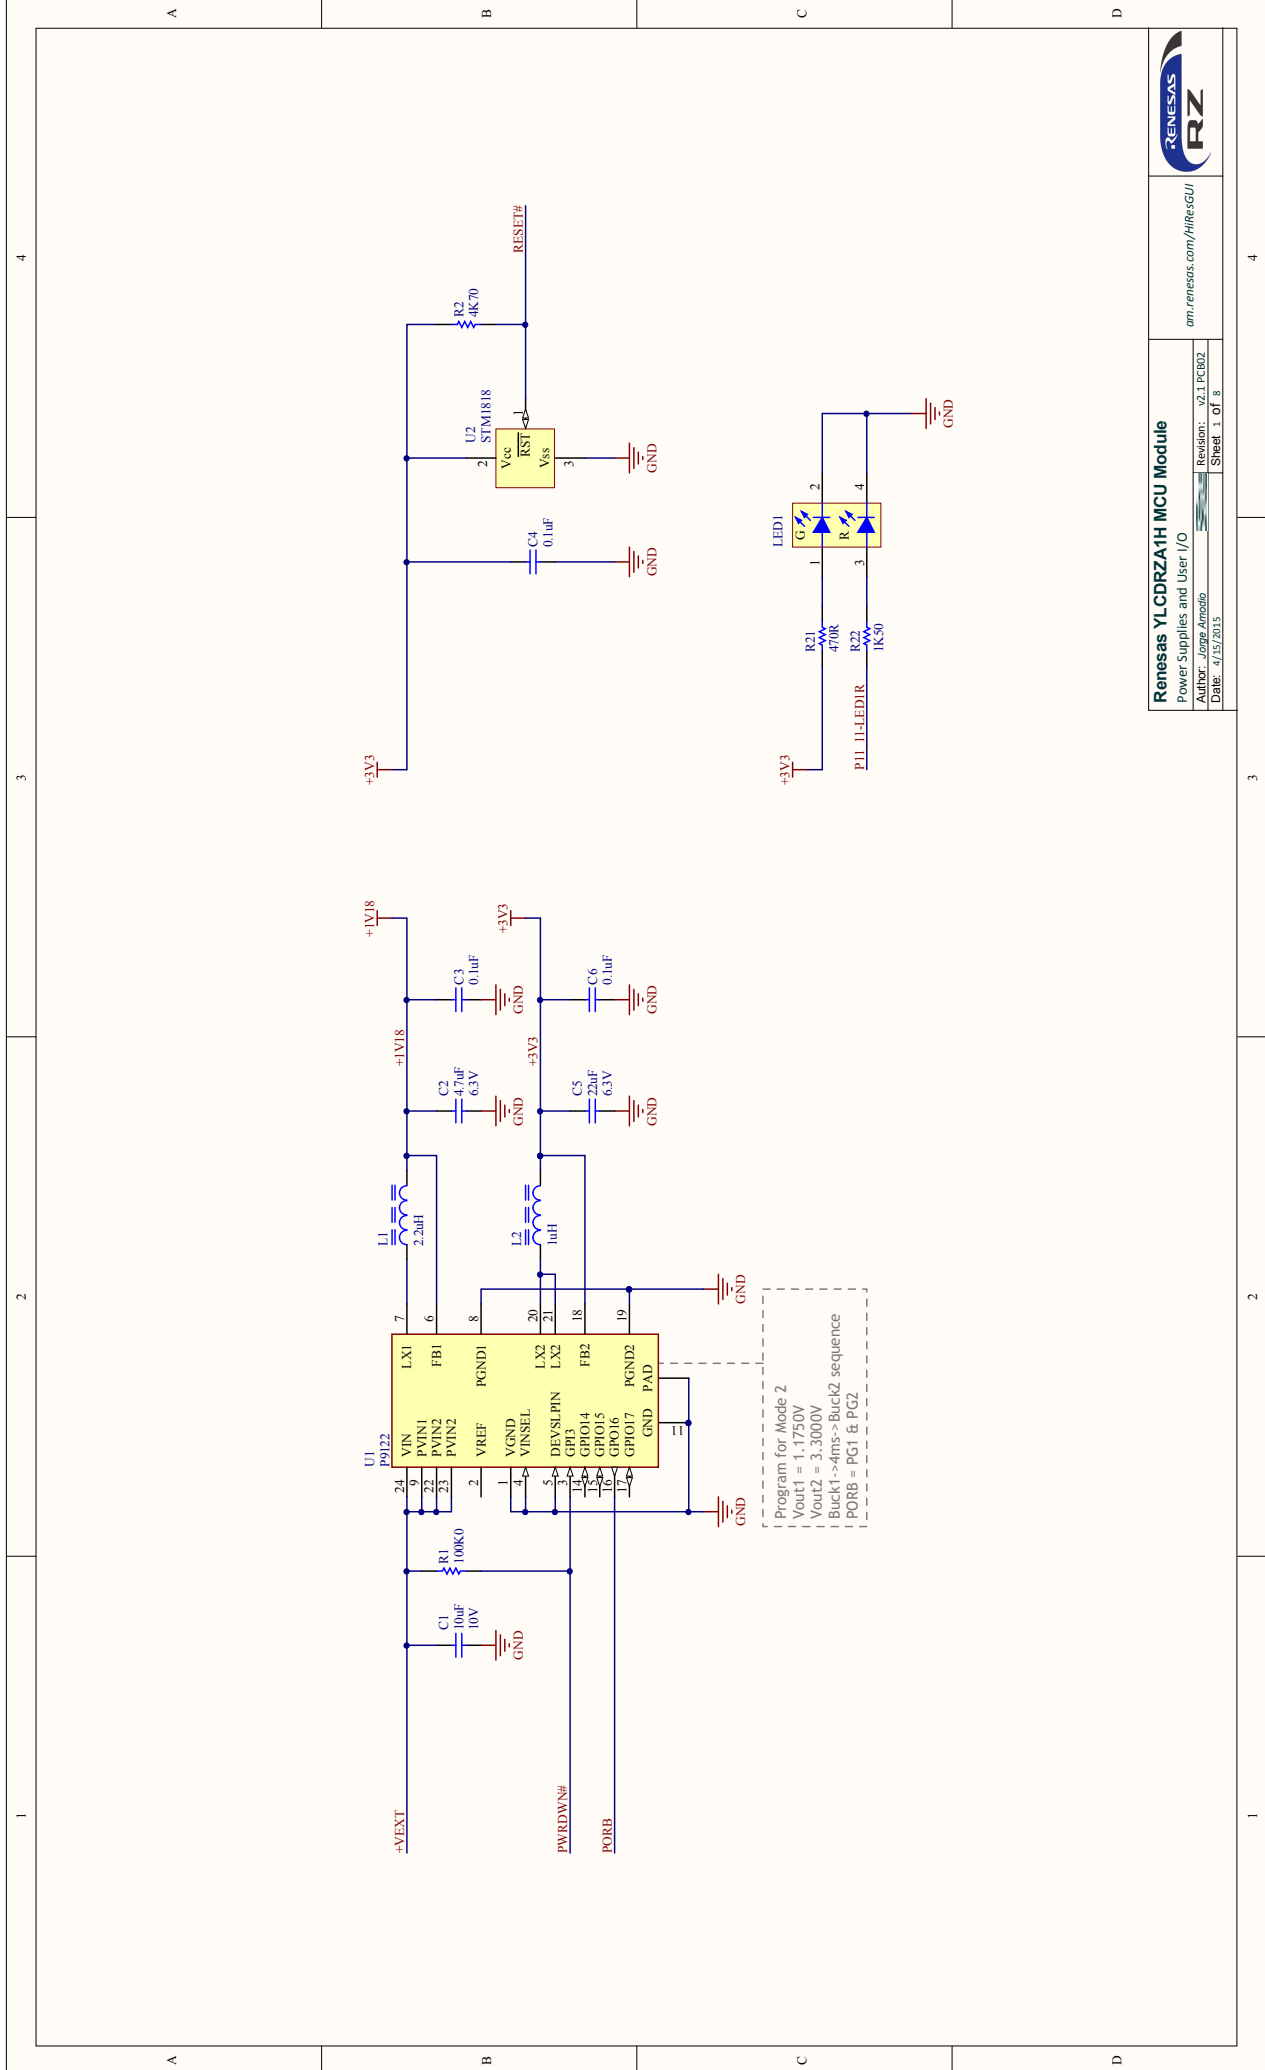

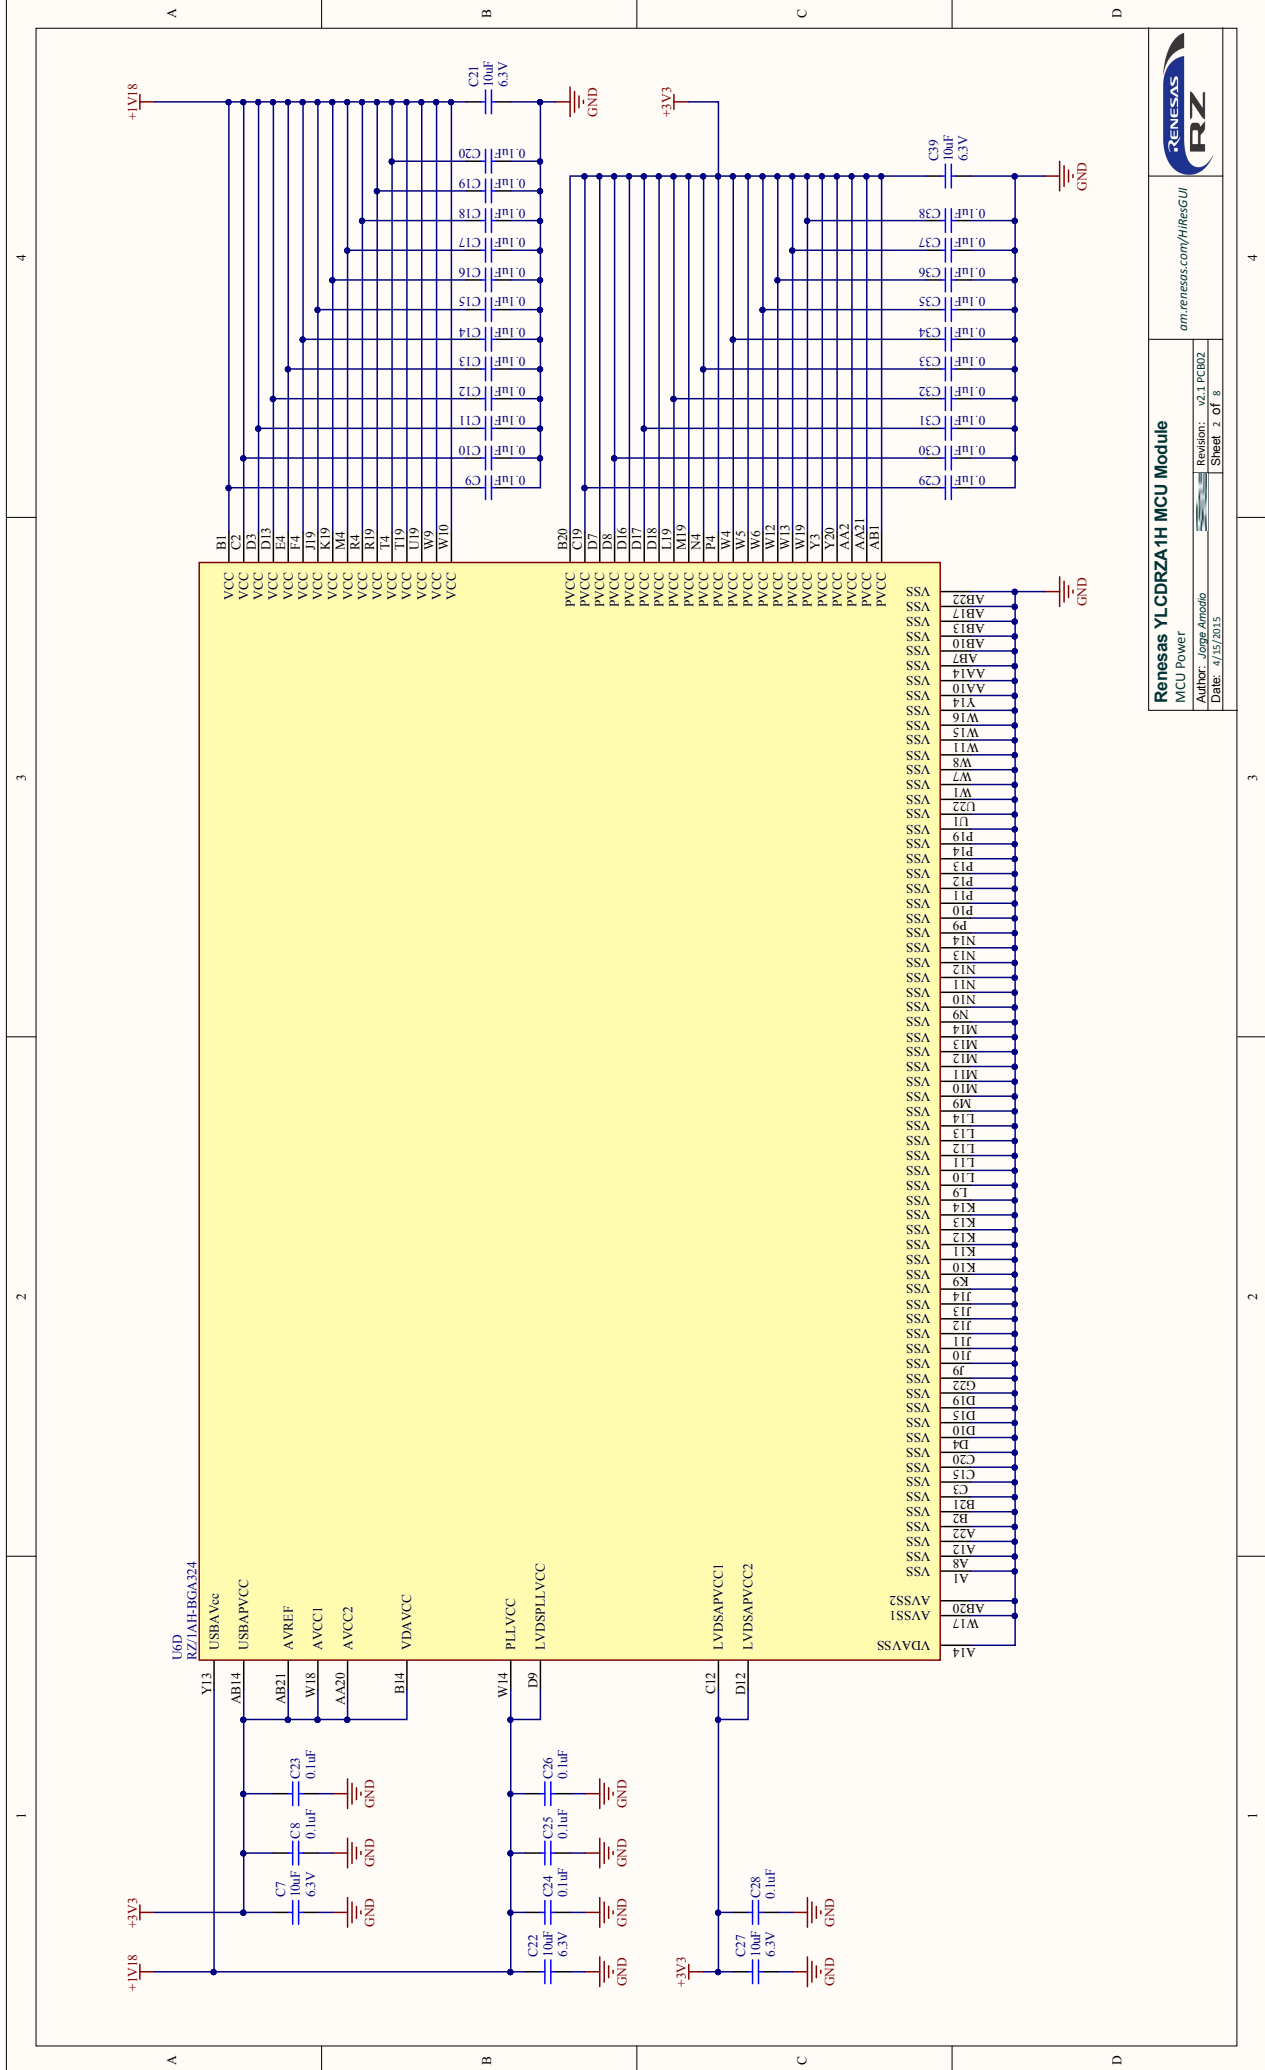

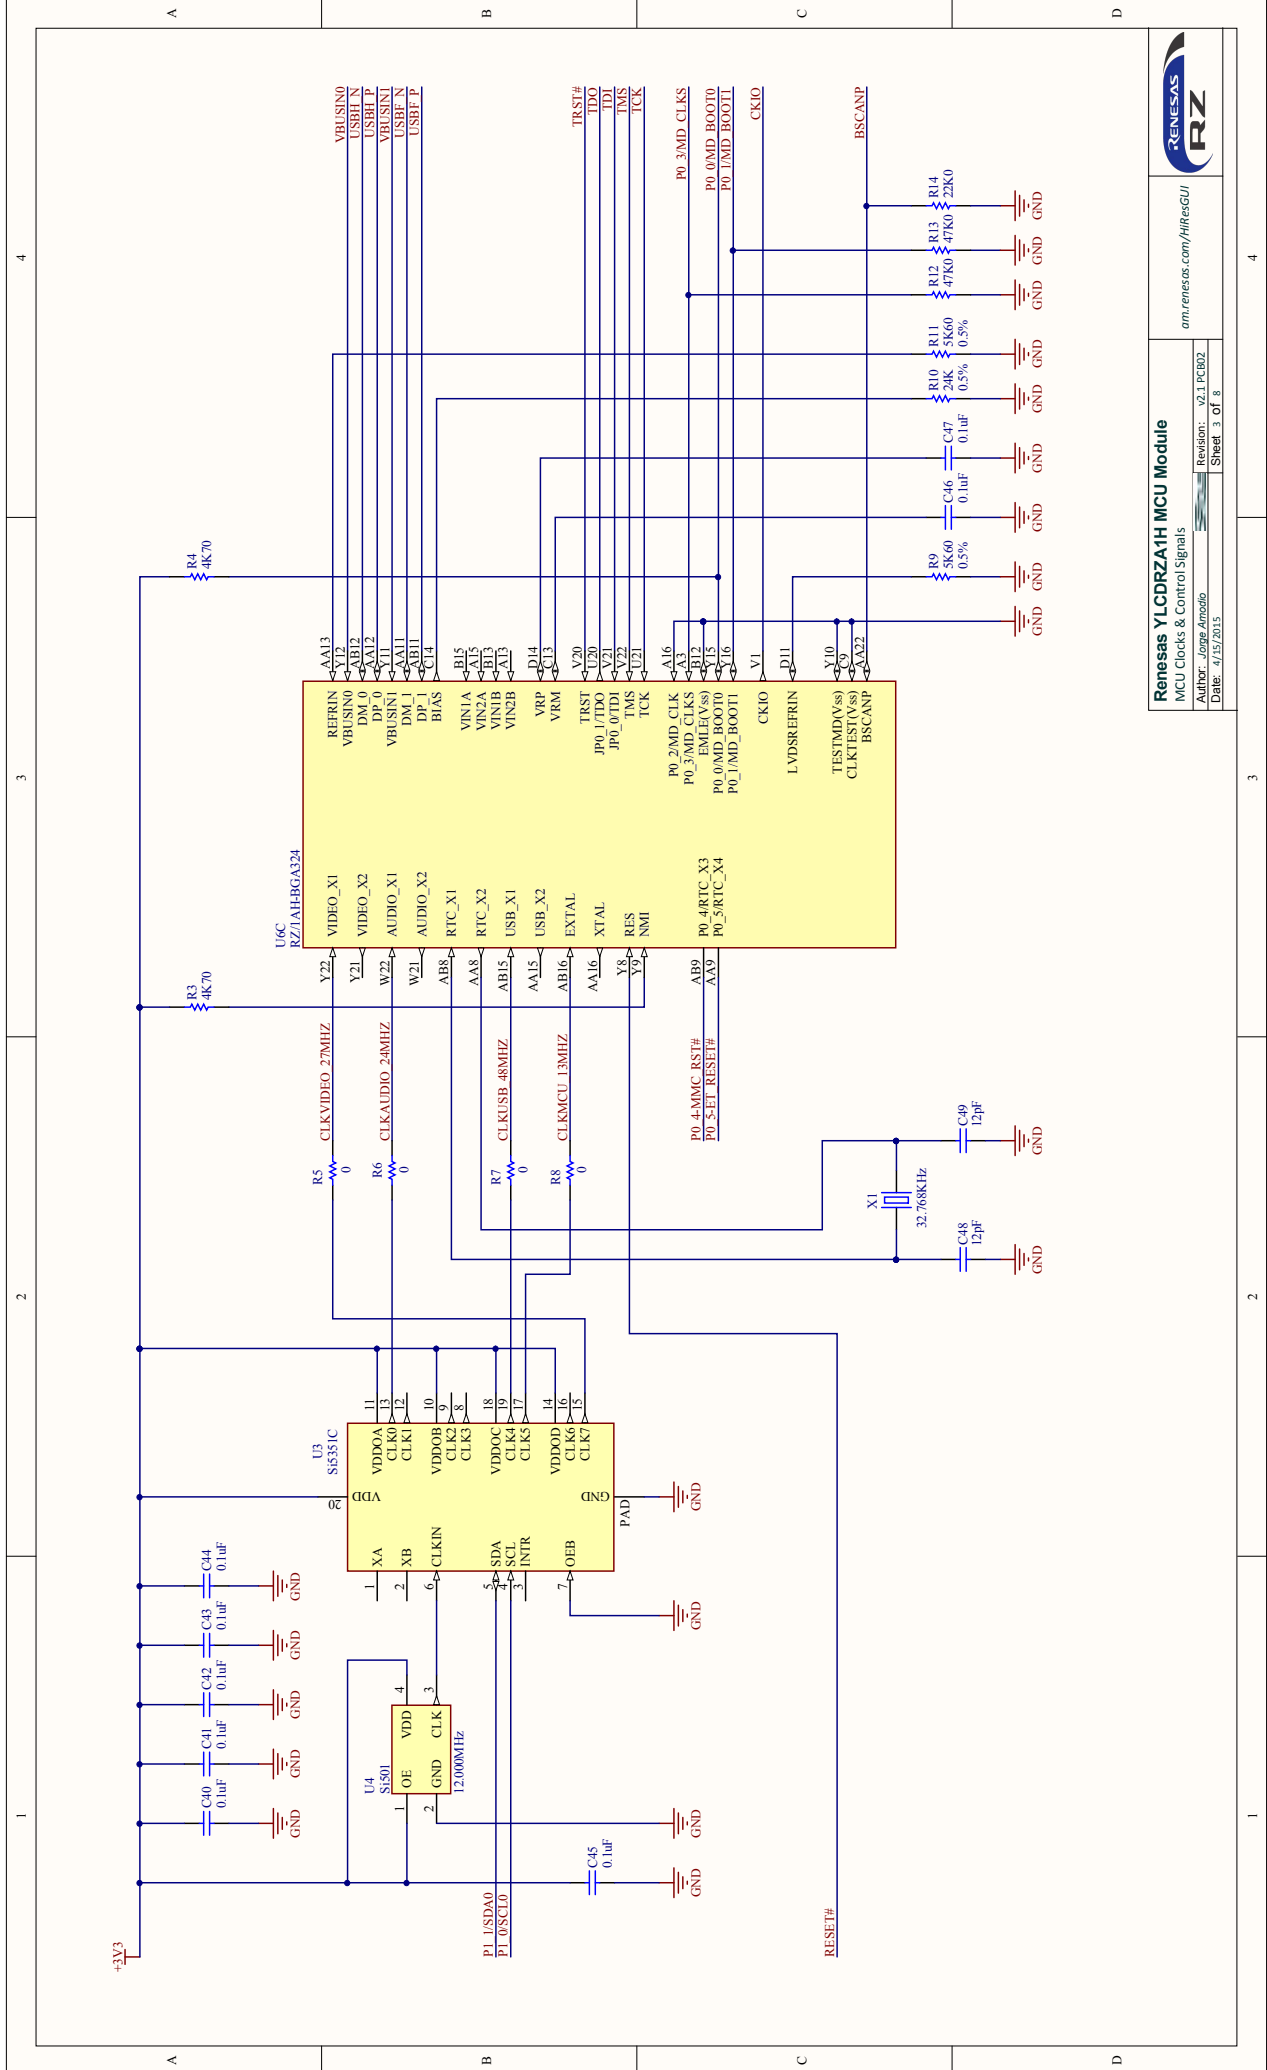







```



P2_12/D238/RSPCK0/DV0_0 DATA12/SPB04_0 CKR3/IRQ6/LCD1_0 DATA12/TIOC1B_0
P2_13/D239/S5100/DV0_0 DATA13/SPB05_0 CKR3/SCS0/LCD1_0 DATA13/TIOC1B_0
P2_14/D300/M0S80/DV0_0 DATA14/SPB06_0 CKR3/SCS0/LCD1_0 DATA14/IRQ00_0
P2_15/D301/PTX1/LCDV0_0 DATA15/SPB00_0 IMLB_0 CLK/IRQ25/VIO_0 D01/C00_0 DATA16_0
P2_16/D301/PTX1/LCDV0_0 DATA16/SPB00_0 IMLB_0 CLK/IRQ25/VIO_0 D01/C00_0 DATA17_0
P2_17/D301/PTX1/LCDV0_0 DATA17/SPB01_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA18_0
P2_18/D301/PTX1/LCDV0_0 DATA18/SPB02_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA19_0
P2_19/D301/PTX1/LCDV0_0 DATA19/SPB03_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA20_0
P2_20/D301/PTX1/LCDV0_0 DATA20/SPB04_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA21_0
P2_21/D301/PTX1/LCDV0_0 DATA21/SPB05_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA22_0
P2_22/D301/PTX1/LCDV0_0 DATA22/SPB06_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA23_0
P2_23/D301/PTX1/LCDV0_0 DATA23/SPB07_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA24_0
P2_24/D301/PTX1/LCDV0_0 DATA24/SPB08_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA25_0
P2_25/D301/PTX1/LCDV0_0 DATA25/SPB09_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA26_0
P2_26/D301/PTX1/LCDV0_0 DATA26/SPB10_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA27_0
P2_27/D301/PTX1/LCDV0_0 DATA27/SPB11_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA28_0
P2_28/D301/PTX1/LCDV0_0 DATA28/SPB12_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA29_0
P2_29/D301/PTX1/LCDV0_0 DATA29/SPB13_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA30_0
P2_30/D301/PTX1/LCDV0_0 DATA30/SPB14_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA31_0
P2_31/D301/PTX1/LCDV0_0 DATA31/SPB15_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA32_0
P2_32/D301/PTX1/LCDV0_0 DATA32/SPB16_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA33_0
P2_33/D301/PTX1/LCDV0_0 DATA33/SPB17_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA34_0
P2_34/D301/PTX1/LCDV0_0 DATA34/SPB18_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA35_0
P2_35/D301/PTX1/LCDV0_0 DATA35/SPB19_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA36_0
P2_36/D301/PTX1/LCDV0_0 DATA36/SPB20_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA37_0
P2_37/D301/PTX1/LCDV0_0 DATA37/SPB21_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA38_0
P2_38/D301/PTX1/LCDV0_0 DATA38/SPB22_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA39_0
P2_39/D301/PTX1/LCDV0_0 DATA39/SPB23_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA40_0
P2_40/D301/PTX1/LCDV0_0 DATA40/SPB24_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA41_0
P2_41/D301/PTX1/LCDV0_0 DATA41/SPB25_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA42_0
P2_42/D301/PTX1/LCDV0_0 DATA42/SPB26_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA43_0
P2_43/D301/PTX1/LCDV0_0 DATA43/SPB27_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA44_0
P2_44/D301/PTX1/LCDV0_0 DATA44/SPB28_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA45_0
P2_45/D301/PTX1/LCDV0_0 DATA45/SPB29_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA46_0
P2_46/D301/PTX1/LCDV0_0 DATA46/SPB30_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA47_0
P2_47/D301/PTX1/LCDV0_0 DATA47/SPB31_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA48_0
P2_48/D301/PTX1/LCDV0_0 DATA48/SPB32_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA49_0
P2_49/D301/PTX1/LCDV0_0 DATA49/SPB33_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA50_0
P2_50/D301/PTX1/LCDV0_0 DATA50/SPB34_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA51_0
P2_51/D301/PTX1/LCDV0_0 DATA51/SPB35_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA52_0
P2_52/D301/PTX1/LCDV0_0 DATA52/SPB36_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA53_0
P2_53/D301/PTX1/LCDV0_0 DATA53/SPB37_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA54_0
P2_54/D301/PTX1/LCDV0_0 DATA54/SPB38_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA55_0
P2_55/D301/PTX1/LCDV0_0 DATA55/SPB39_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA56_0
P2_56/D301/PTX1/LCDV0_0 DATA56/SPB40_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA57_0
P2_57/D301/PTX1/LCDV0_0 DATA57/SPB41_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA58_0
P2_58/D301/PTX1/LCDV0_0 DATA58/SPB42_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA59_0
P2_59/D301/PTX1/LCDV0_0 DATA59/SPB43_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA60_0
P2_60/D301/PTX1/LCDV0_0 DATA60/SPB44_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA61_0
P2_61/D301/PTX1/LCDV0_0 DATA61/SPB45_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA62_0
P2_62/D301/PTX1/LCDV0_0 DATA62/SPB46_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA63_0
P2_63/D301/PTX1/LCDV0_0 DATA63/SPB47_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA64_0
P2_64/D301/PTX1/LCDV0_0 DATA64/SPB48_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA65_0
P2_65/D301/PTX1/LCDV0_0 DATA65/SPB49_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA66_0
P2_66/D301/PTX1/LCDV0_0 DATA66/SPB50_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA67_0
P2_67/D301/PTX1/LCDV0_0 DATA67/SPB51_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA68_0
P2_68/D301/PTX1/LCDV0_0 DATA68/SPB52_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA69_0
P2_69/D301/PTX1/LCDV0_0 DATA69/SPB53_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA70_0
P2_70/D301/PTX1/LCDV0_0 DATA70/SPB54_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA71_0
P2_71/D301/PTX1/LCDV0_0 DATA71/SPB55_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA72_0
P2_72/D301/PTX1/LCDV0_0 DATA72/SPB56_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA73_0
P2_73/D301/PTX1/LCDV0_0 DATA73/SPB57_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA74_0
P2_74/D301/PTX1/LCDV0_0 DATA74/SPB58_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA75_0
P2_75/D301/PTX1/LCDV0_0 DATA75/SPB59_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA76_0
P2_76/D301/PTX1/LCDV0_0 DATA76/SPB60_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA77_0
P2_77/D301/PTX1/LCDV0_0 DATA77/SPB61_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA78_0
P2_78/D301/PTX1/LCDV0_0 DATA78/SPB62_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA79_0
P2_79/D301/PTX1/LCDV0_0 DATA79/SPB63_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA80_0
P2_80/D301/PTX1/LCDV0_0 DATA80/SPB64_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C00_0 DATA81_0
P2_81/D301/PTX1/LCDV0_0 DATA81/SPB65_0 IMLB_0 DATA17/OC2A/VIO_0 D01/C
```

A21	P2 12SPHIO1	P10 0V10 CLK	AB4
A20	P2 13SPHIO1	P10 0V10 VSSNC	CA5
A19	P2 14SPHIO1	P10 2V10 HSNC	CA6
A18	P2 15SPHIO21	P10 3V10 FLD	CA8
A19	P2 16SPHIO31	P10 4V10 D0	CA9
A21	P2 0ET 1XC1K	P10 5V10 D1	A20
A22	P2 1ET 1XER	P10 6V10 D2	A21
A21	P2 2ET 1XEN	P10 7V10 D3	A22
A20	P2 3ET 1XES	P10 8V10 D4	A21
A21	P2 4ET 1XED	P10 9V10 D5	A20
A22	P2 5ET 1XED	P10 10V10 D6	A21
A20	P2 6ET 1X02	P10 11V10 D7	A22
A21	P2 7ET 1X03	P10 12SS1CK	A20
A20	P2 8ET 1X00	P10 13SS1WS	A21
A21	P2 9ET 1X01	P10 14SS1RD	A20
A22	P2 10ET 1X02	P10 15SS1RD	A21
A19	P2 11ET 1X03		
A21		P11 0H CD DATA7	A4
A20		P11 1H CD DATA6	A5
A19		P11 2H CD DATA5	A6
A18		P11 3H CD DATA4	A7
A17		P11 4H CD DATA3	A8
A16		P11 5H CD DATA2	A9
A15		P11 6H CD DATA1	A10
A14		P11 7H CD DATA0	A11
A13		P11 8H CD DEN	A12
A12		P11 9H CD HSNC	A13
A11		P11 11H EDIR	A14
A10		P11 12MMC D4	A15
A9		P11 13MMC D5	A16
A8		P11 14MMC D6	A17
A7		P11 15MMC D7	A18

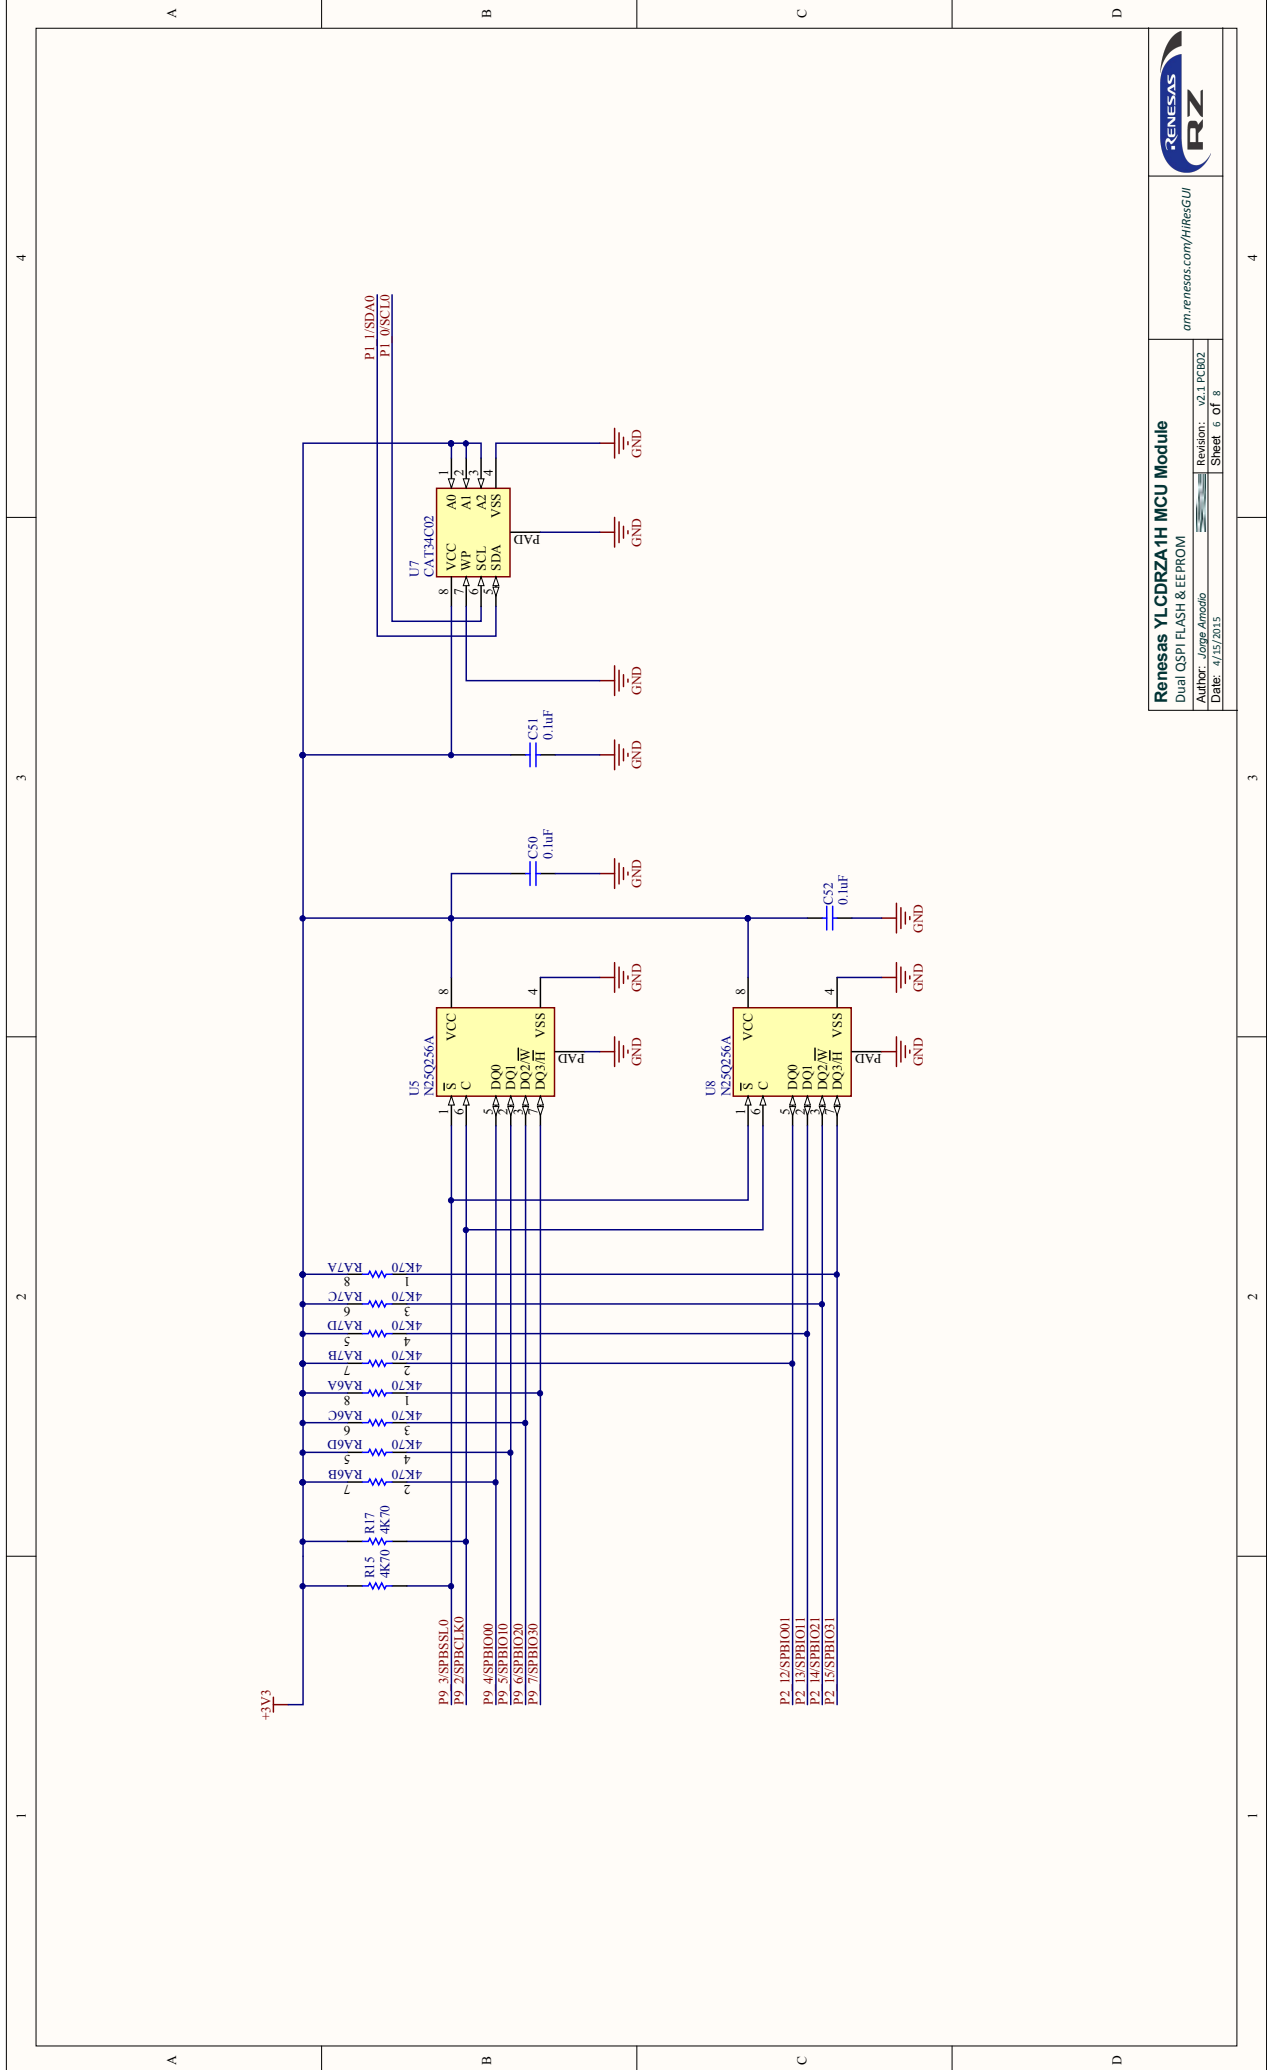

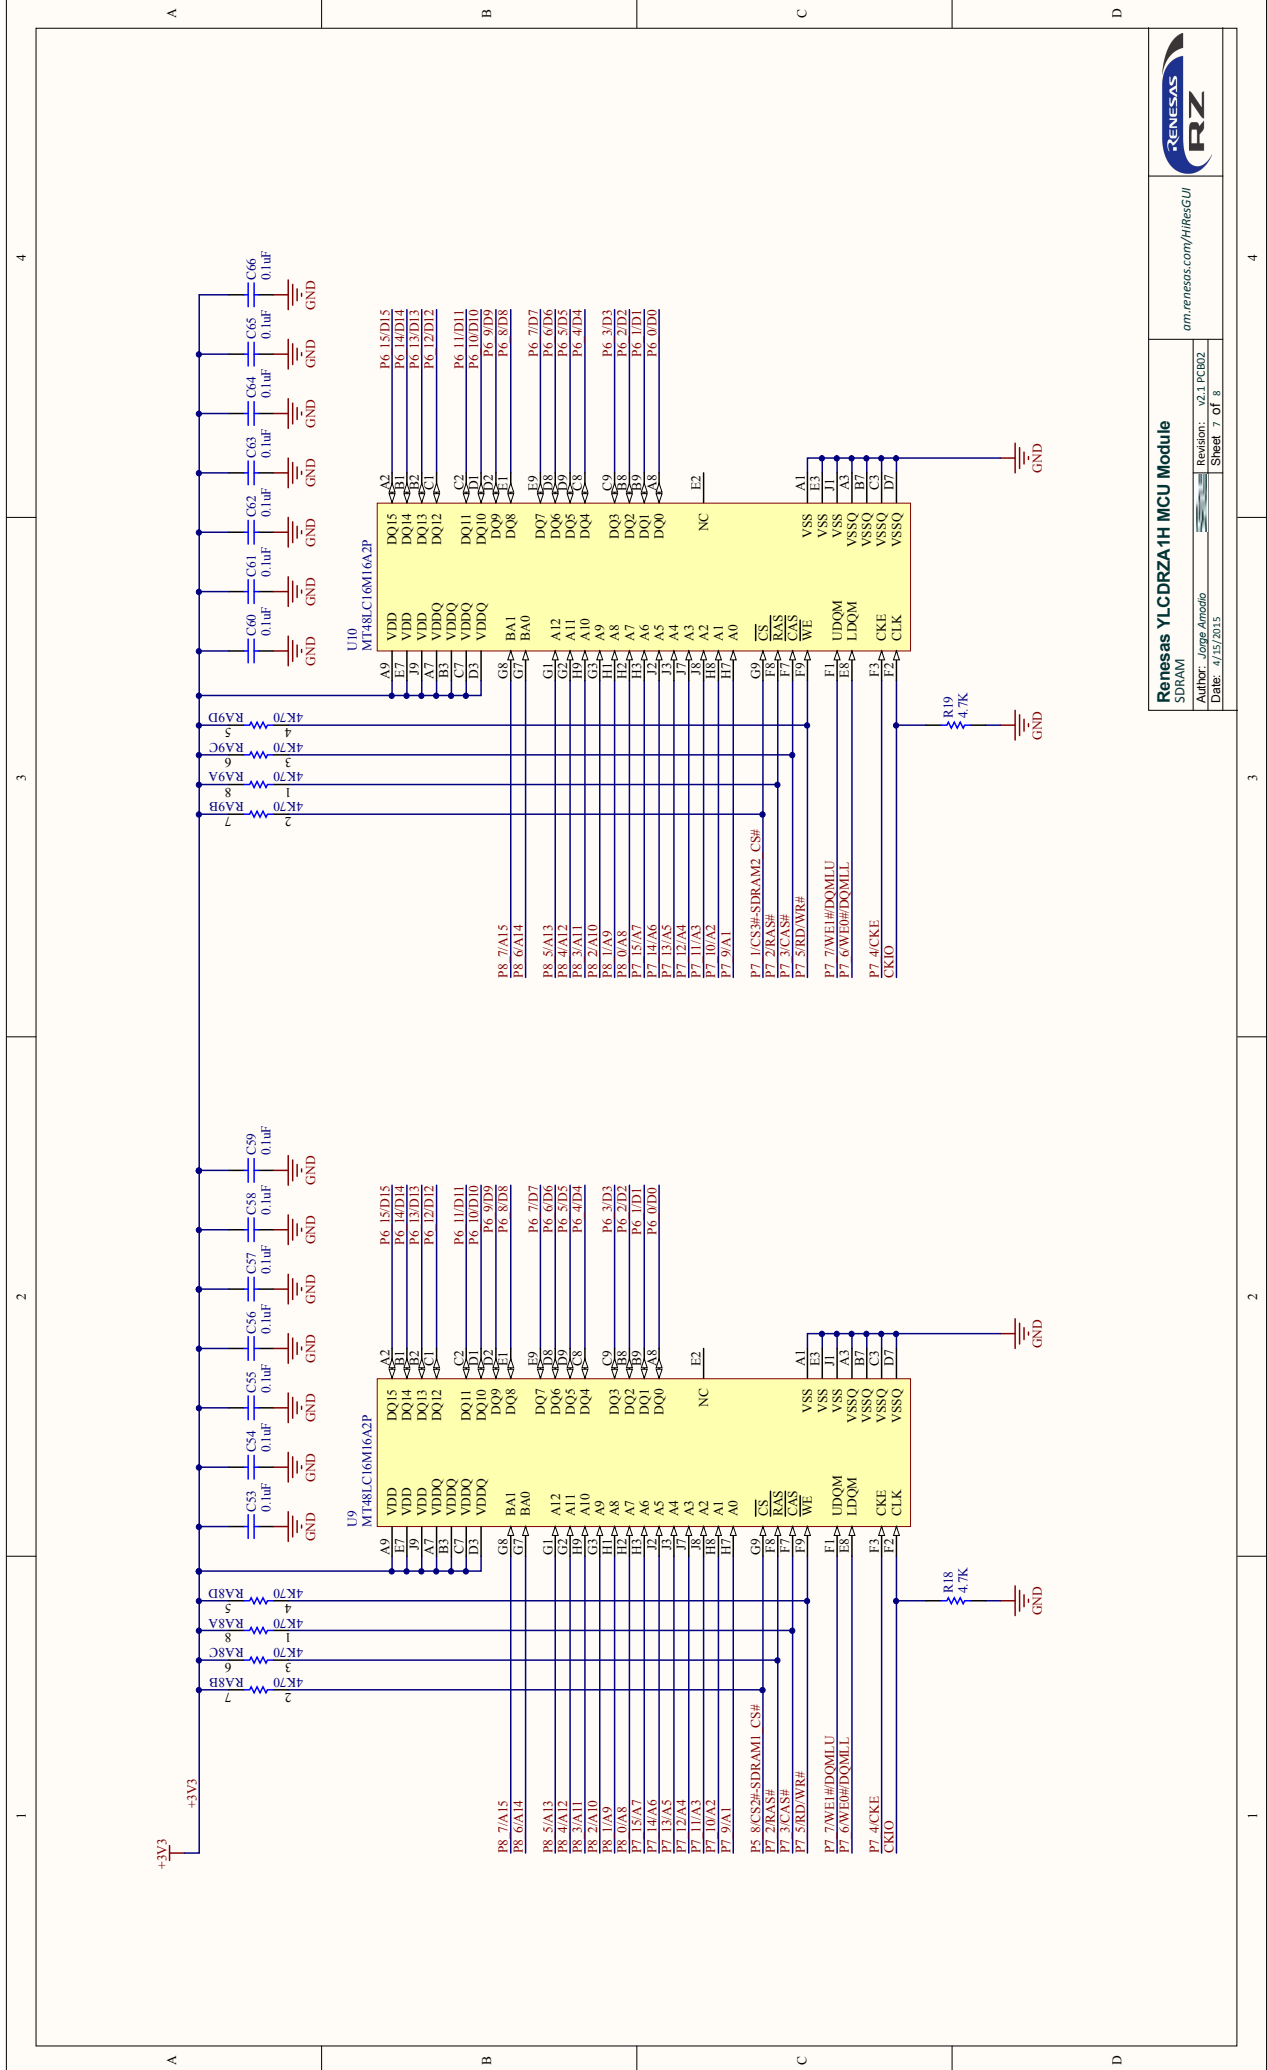


Board to Board connections via PCB Edge 200-pin matching DDR2 SODIMM Socket

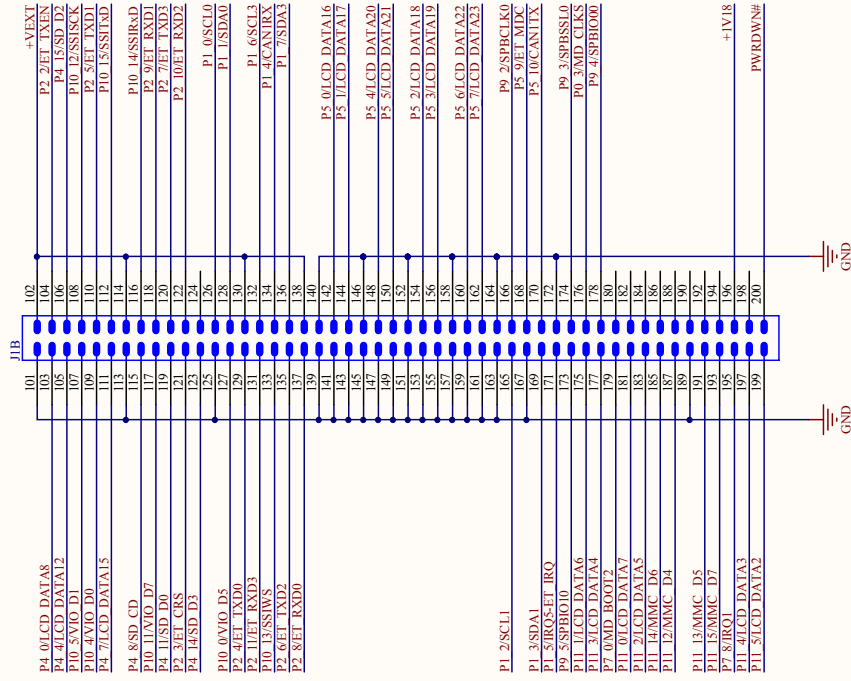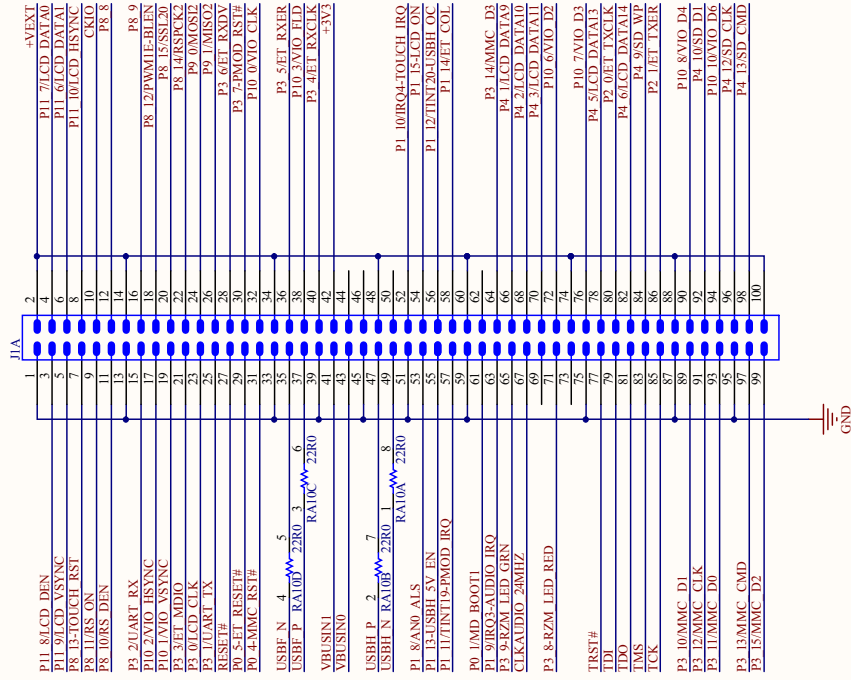



12.3 - RZ Module BOM


ID	Description	Package
C1	CL10A106KP8NNND [Samsung] Ceramic 10uF 10V 10% X5R	0603
C2	CL05A475MQ5NQNC [Samsung] Ceramic 4u7 6V3 20% X5R	0402
C3-4,C6,C8-20,C23-26,C28-C38,C40-47,C50-66	CL03A104KP3NNNC [Samsung] Ceramic 100n0 10V X5R 10%	0201
C48,C49	CL05C120JB5NNNC [Samsung] Ceramic 12p0 50V C0G 5%	0402
C5	CL10A226MQ8NRNC [Samsung] Ceramic 22uF 6.3V X5R 20%	0603
C7,C21-22,C27,C39	CL05A106MQ5NUNC [Samsung] CER 10uF 6.3V X5R 20%	0402
L1	SRN3015-2R2M [Bourns] 2.2uH 1.8A 72mOhm Inductor	SMD
L2	SRN3015-1R0Y [Bourns] 1uH 2.35A Inductor 3x3x1.5mm	SMD
LED1	598-8610-207F [Dialight] LED Bi-Color Red/Green 60/40mcd	1210
R1	ERA-2AED104X [Panasonic] 100K0 0.5% 1/16W 25ppm	0402
R10	ERA-2AED243X [Panasonic] 24k0 0.5% 1/16W 25ppm	0402
R12,R13	ERJ-2RKF4702X [Panasonic] 47k0 1% 1/10W 100ppm	0402
R14	ERA-2AED223X [Panasonic] 22k0 0.5% 1/16W 25ppm	0402
R21	ERA-2AED471X [Panasonic] 470R 0.5% 1/16W 25ppm	0402
R22	ERA-2AED152X [Panasonic] 1K50 0.5% 1/16W 25ppm	0402
R2-4,R15-19	ERA-2AED472X [Panasonic] 4k70 0.5% 1/16W 25ppm	0402
R5-8	CRCW04020000Z0ED [Vishay] 0R00 1/16W	0402
R9,R11	ERA-2AED562X [Panasonic] 5k60 0.5% 1/16W 25ppm	0402
RA10	EXB-28V220JX [Panasonic] IsolArr 22R0 4x 5% 200ppm 1/16W	0804
RA1-9	EXB-28V472JX [Panasonic] IsolArr 4k7 5% 200ppm 1/16W 4x0402	0804
U1	IDTP9122 [IDT] Switcher w/I2C Dual Factory Pgm 1.18[1],3.30[2]	QFN24
U2	STM1818SWX7F [STM] Reset Monitor 2.88V	SOT23
U3	SI5351C [SiLabs] I2C 8 Clock Gen (T/R) Factory Pre-Programmed	QFN20
U4	501AAA-12M0000-DAGR [SiLabs] 12MHz Oscillator 50ppm	2x2.5
U5,U8	N25Q256A13EF840E [Micron] NOR Serial FLASH QSPI 256Mbit	V-PDFN-8/8x6mm
U6	R7S721001VCBG#ACO [Renesas] RZ A1H MCU 10MB BGA324	PRBG0324GA-A
U7	CAT34C02HU41GT4A [OnSemi] EEPROM I2C 2KBit w/OTP	UDFN8
U9,U10	MT48LC16M16A2B4-6A IT:G TR [Micron] 32MB SDRAM 133MHz	VFBGA54
X1	ABS07-32.768KHZ-T [Abracon] 32.768 Tuning Fork Crystal	2-SMD


12.4 - Baseboard Schematics

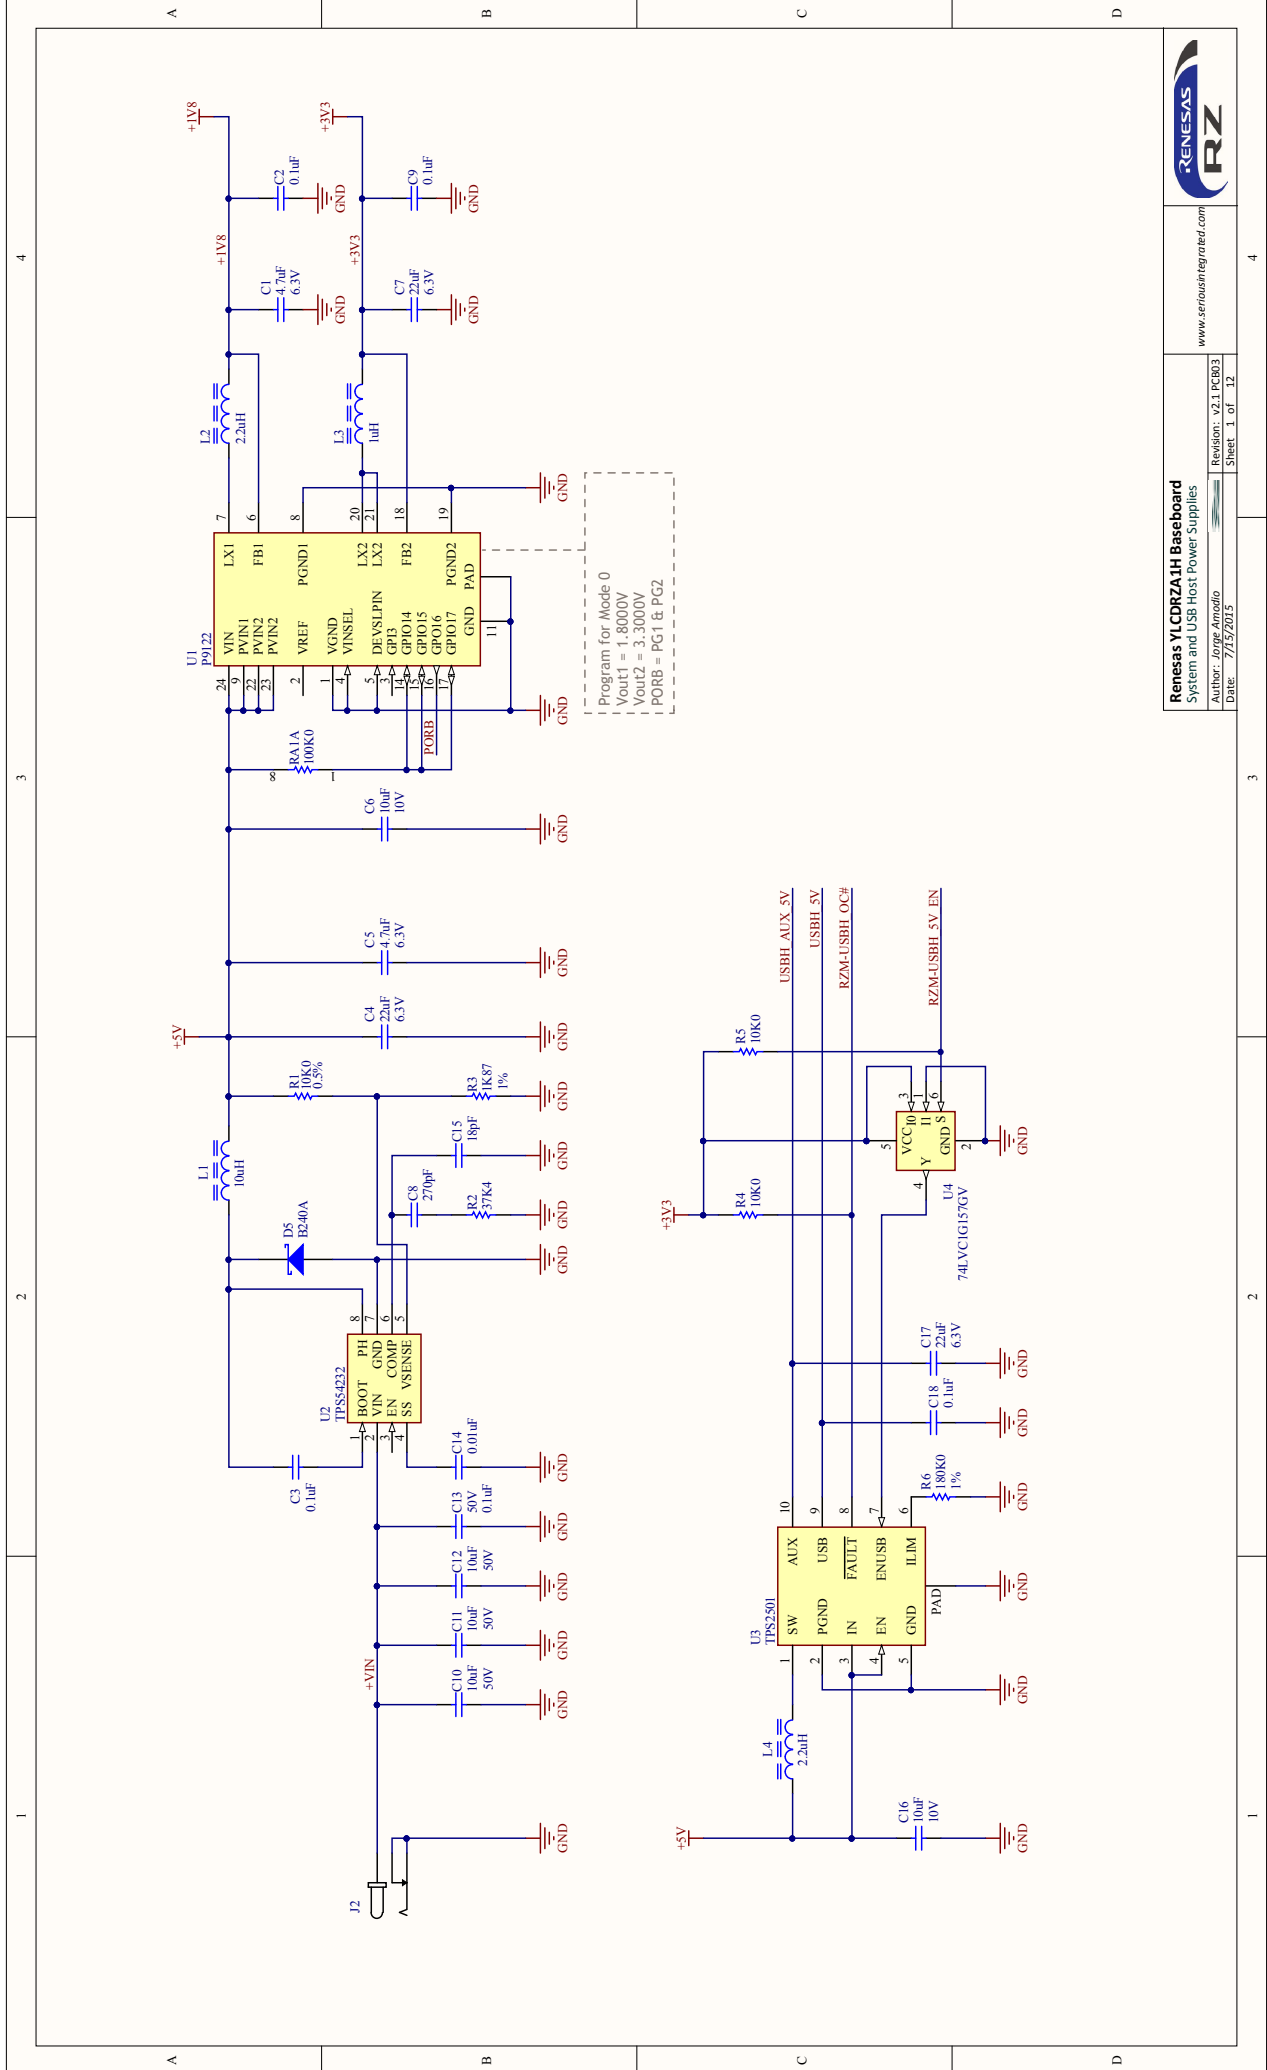

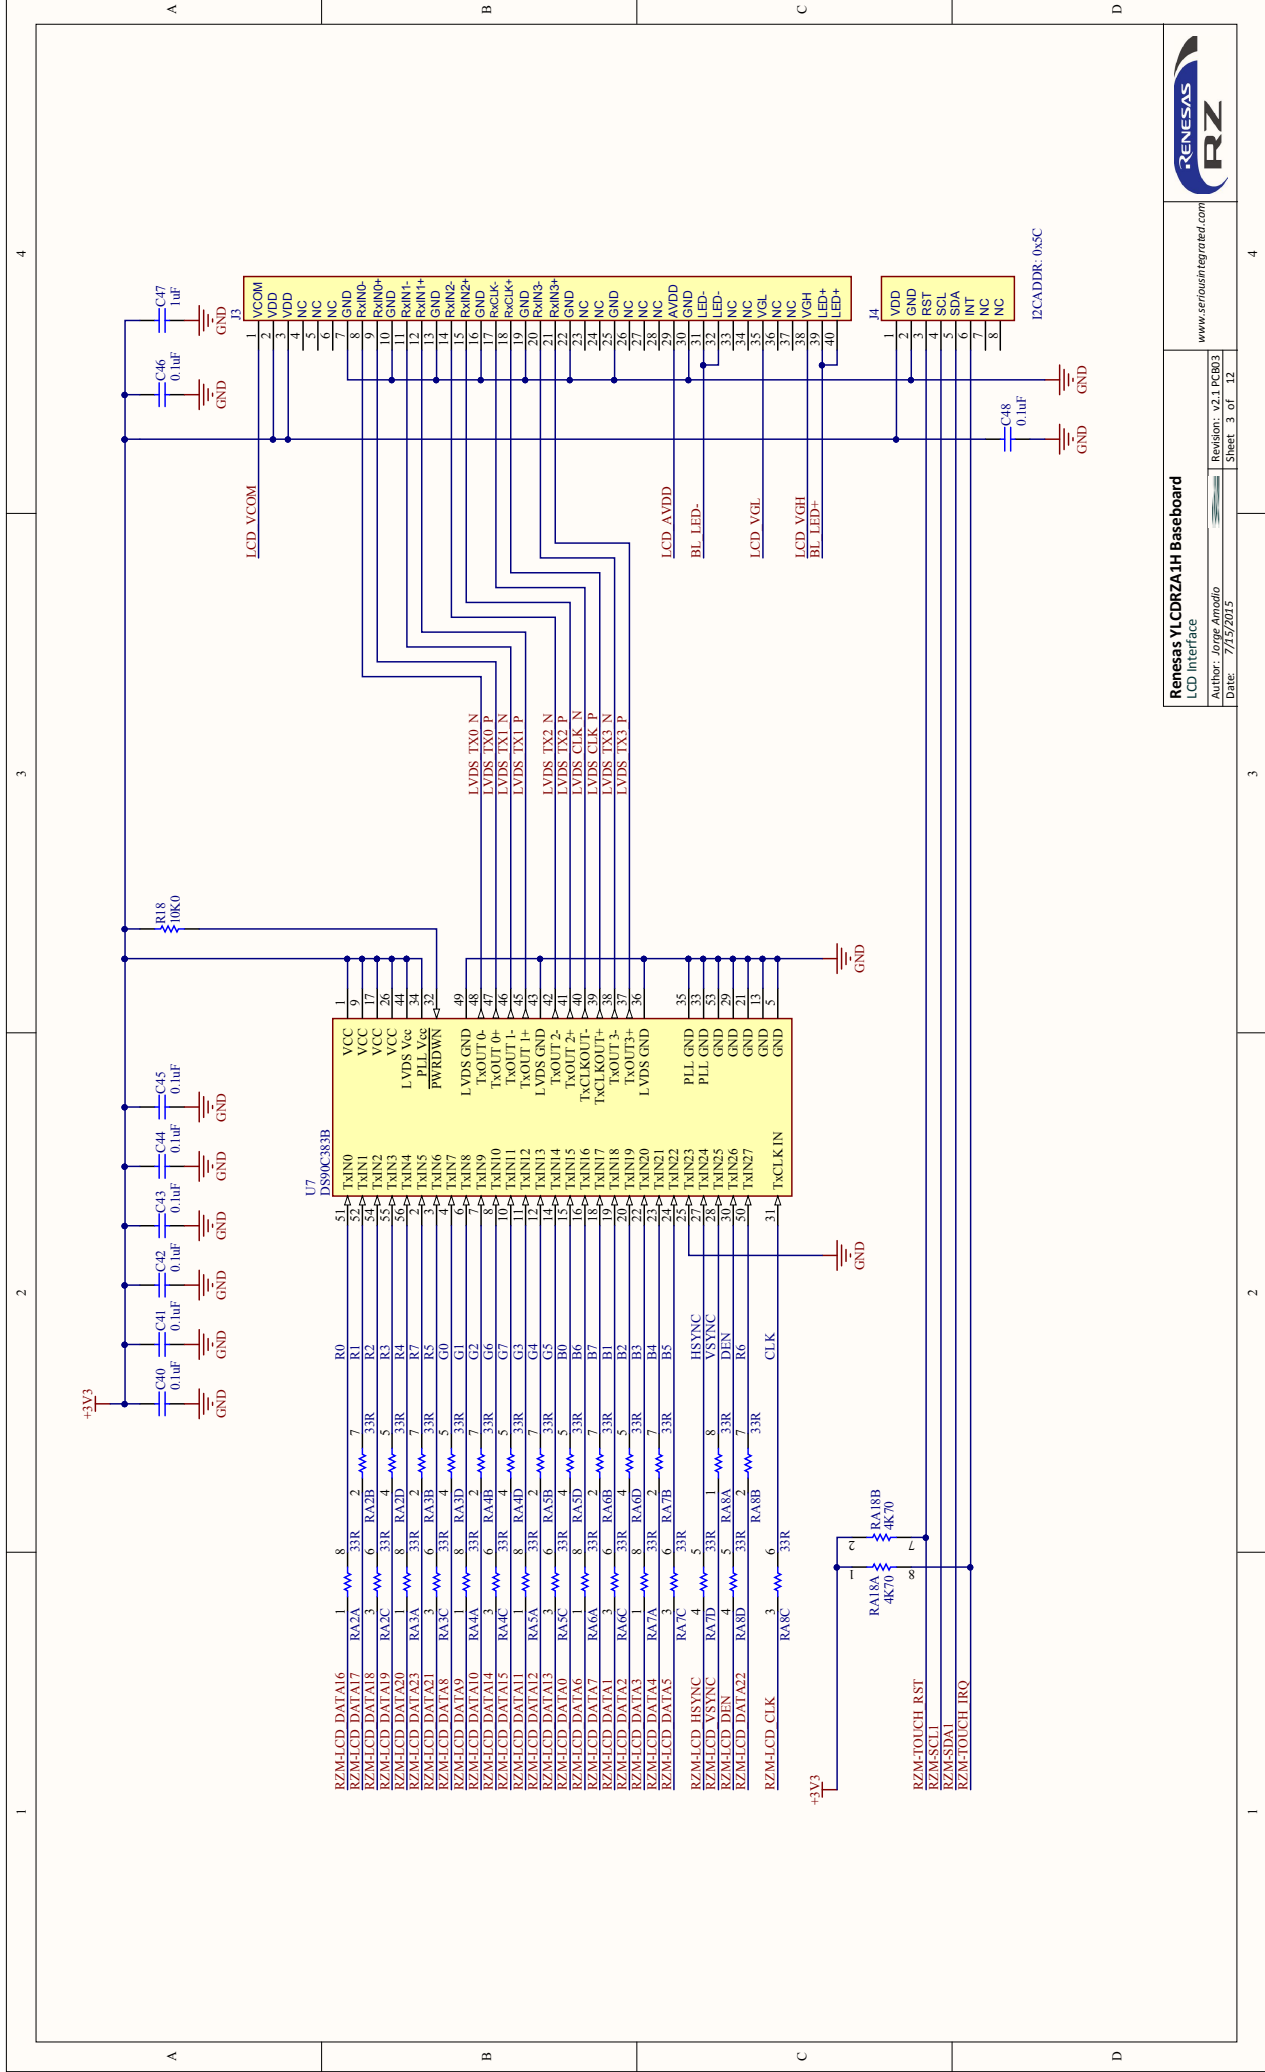

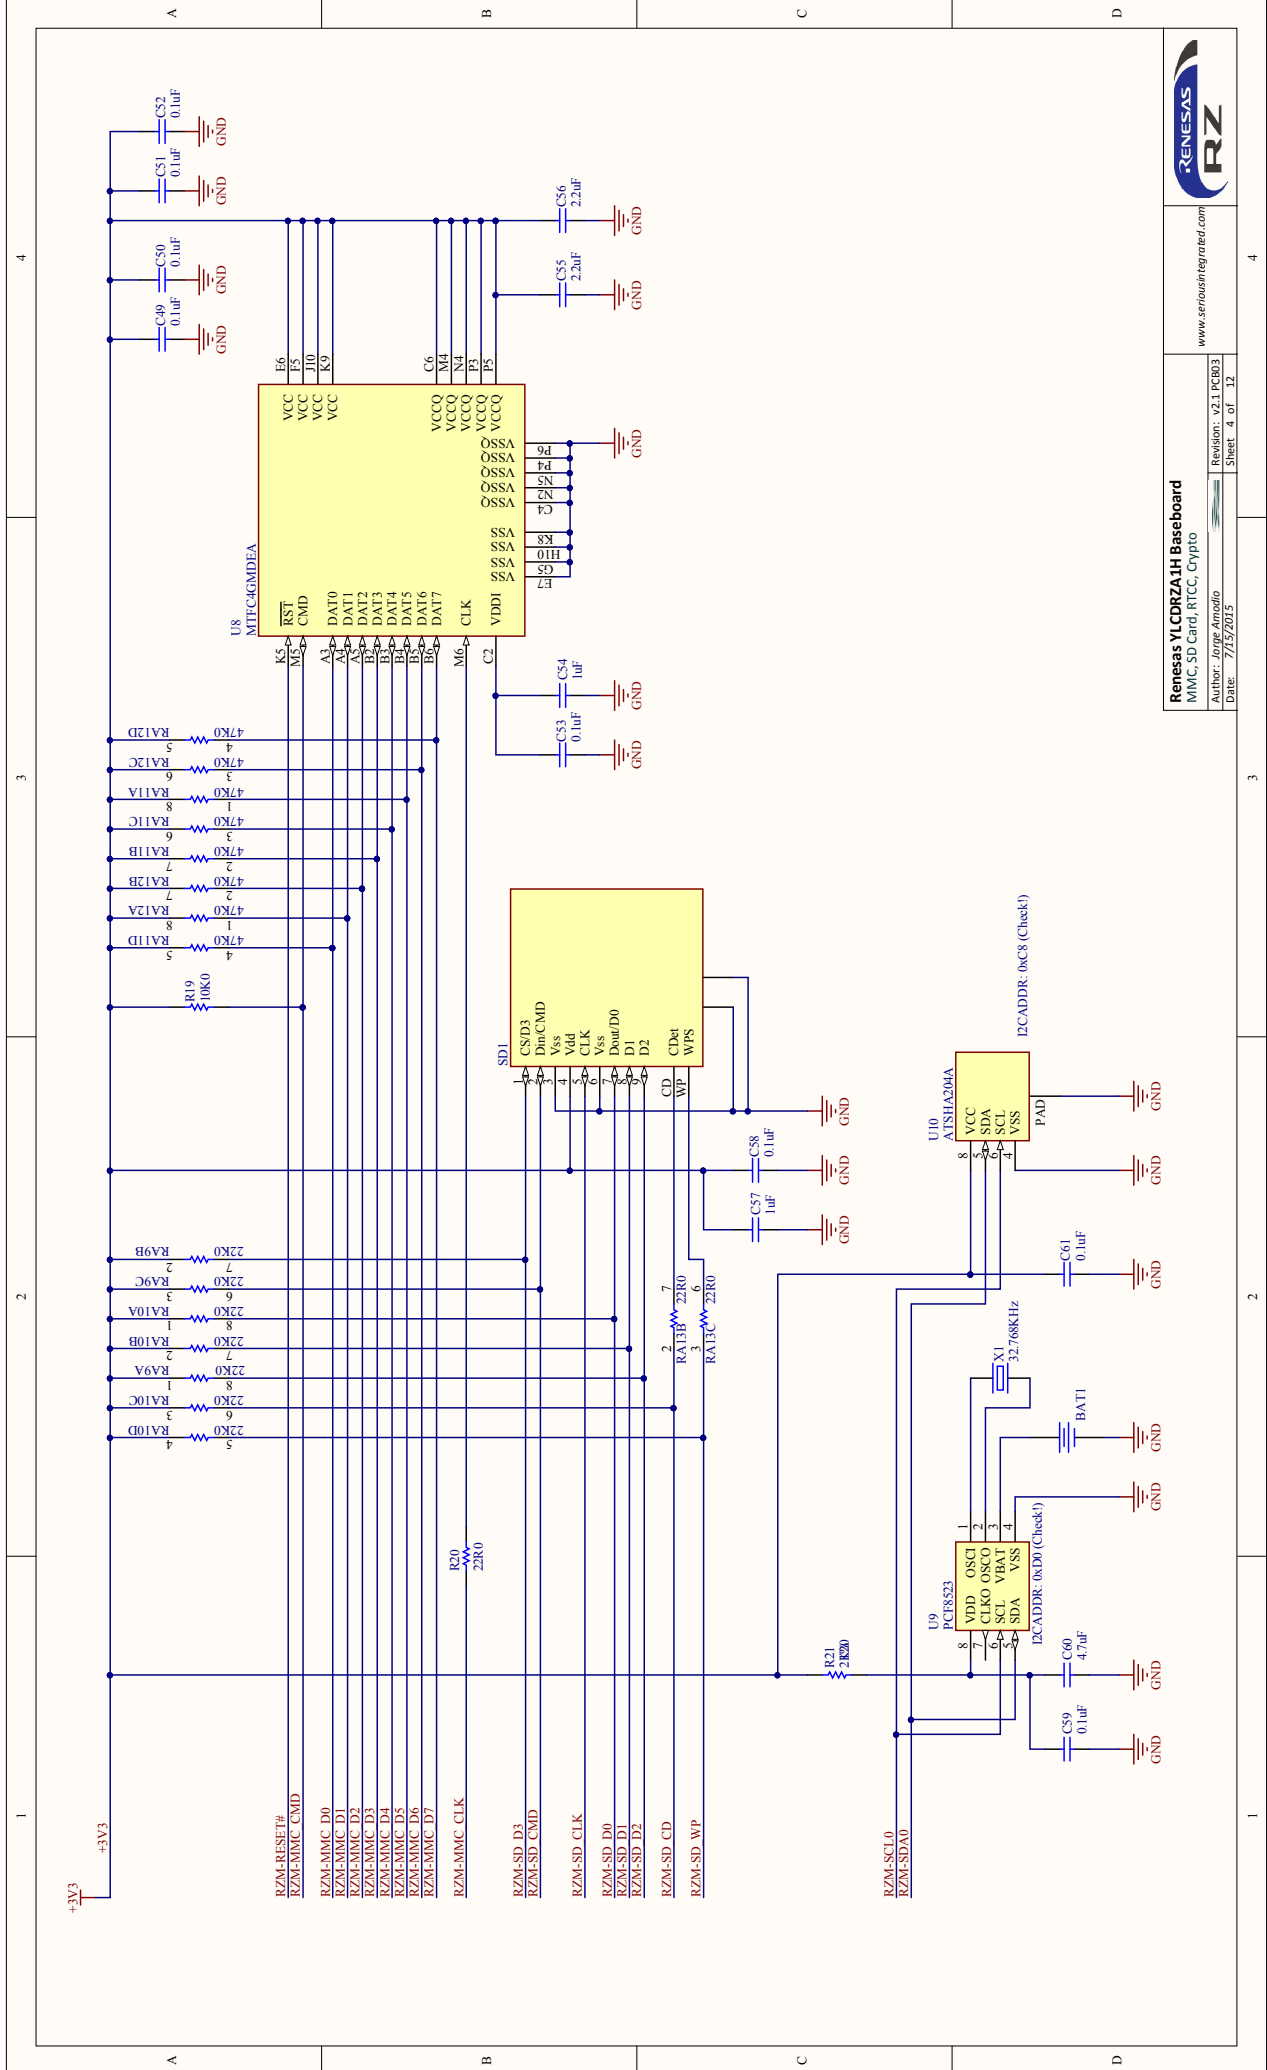

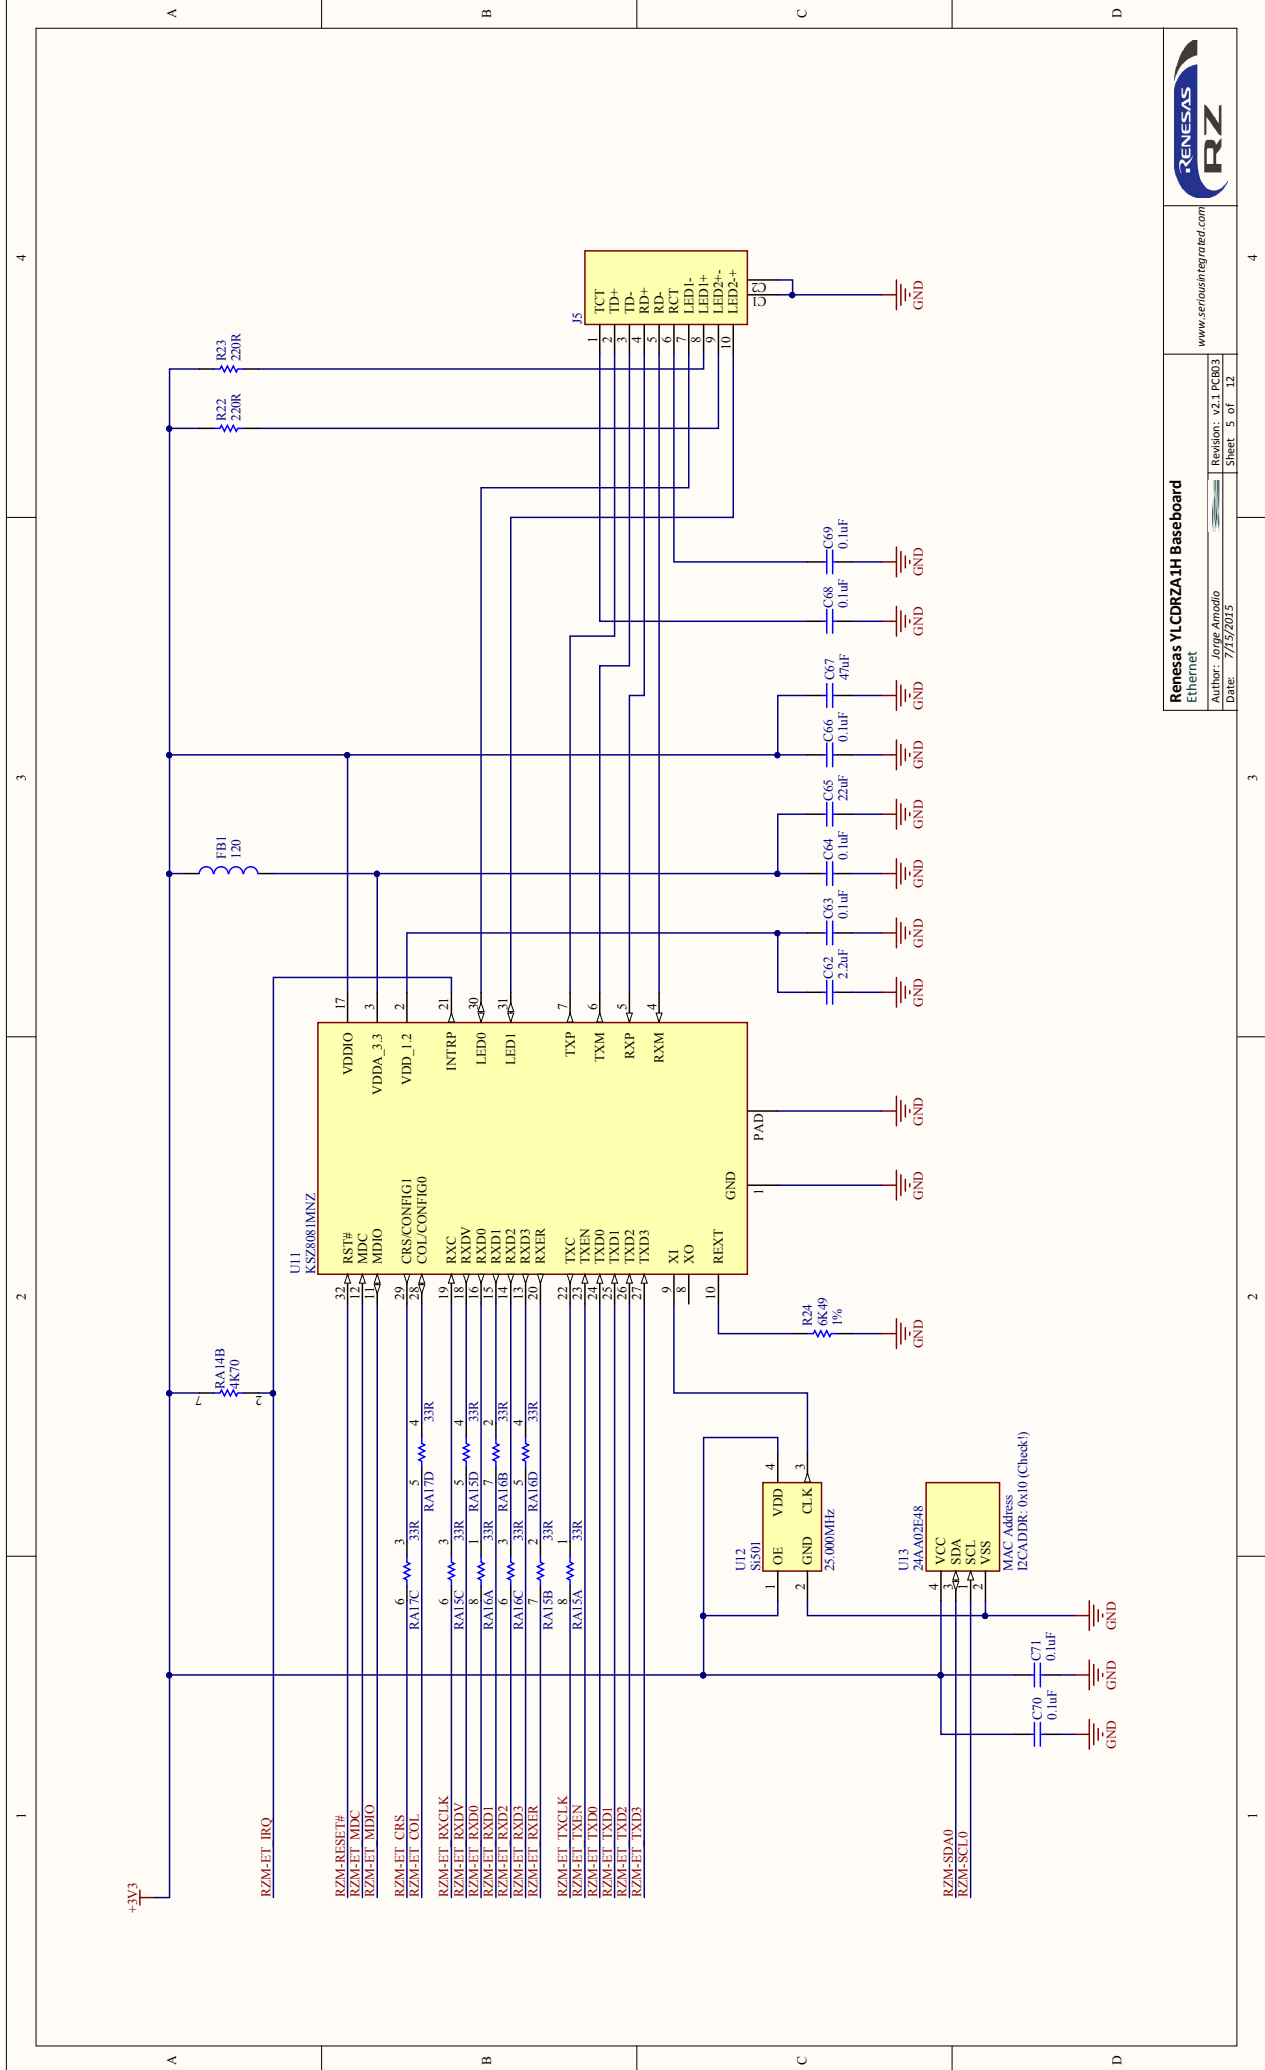

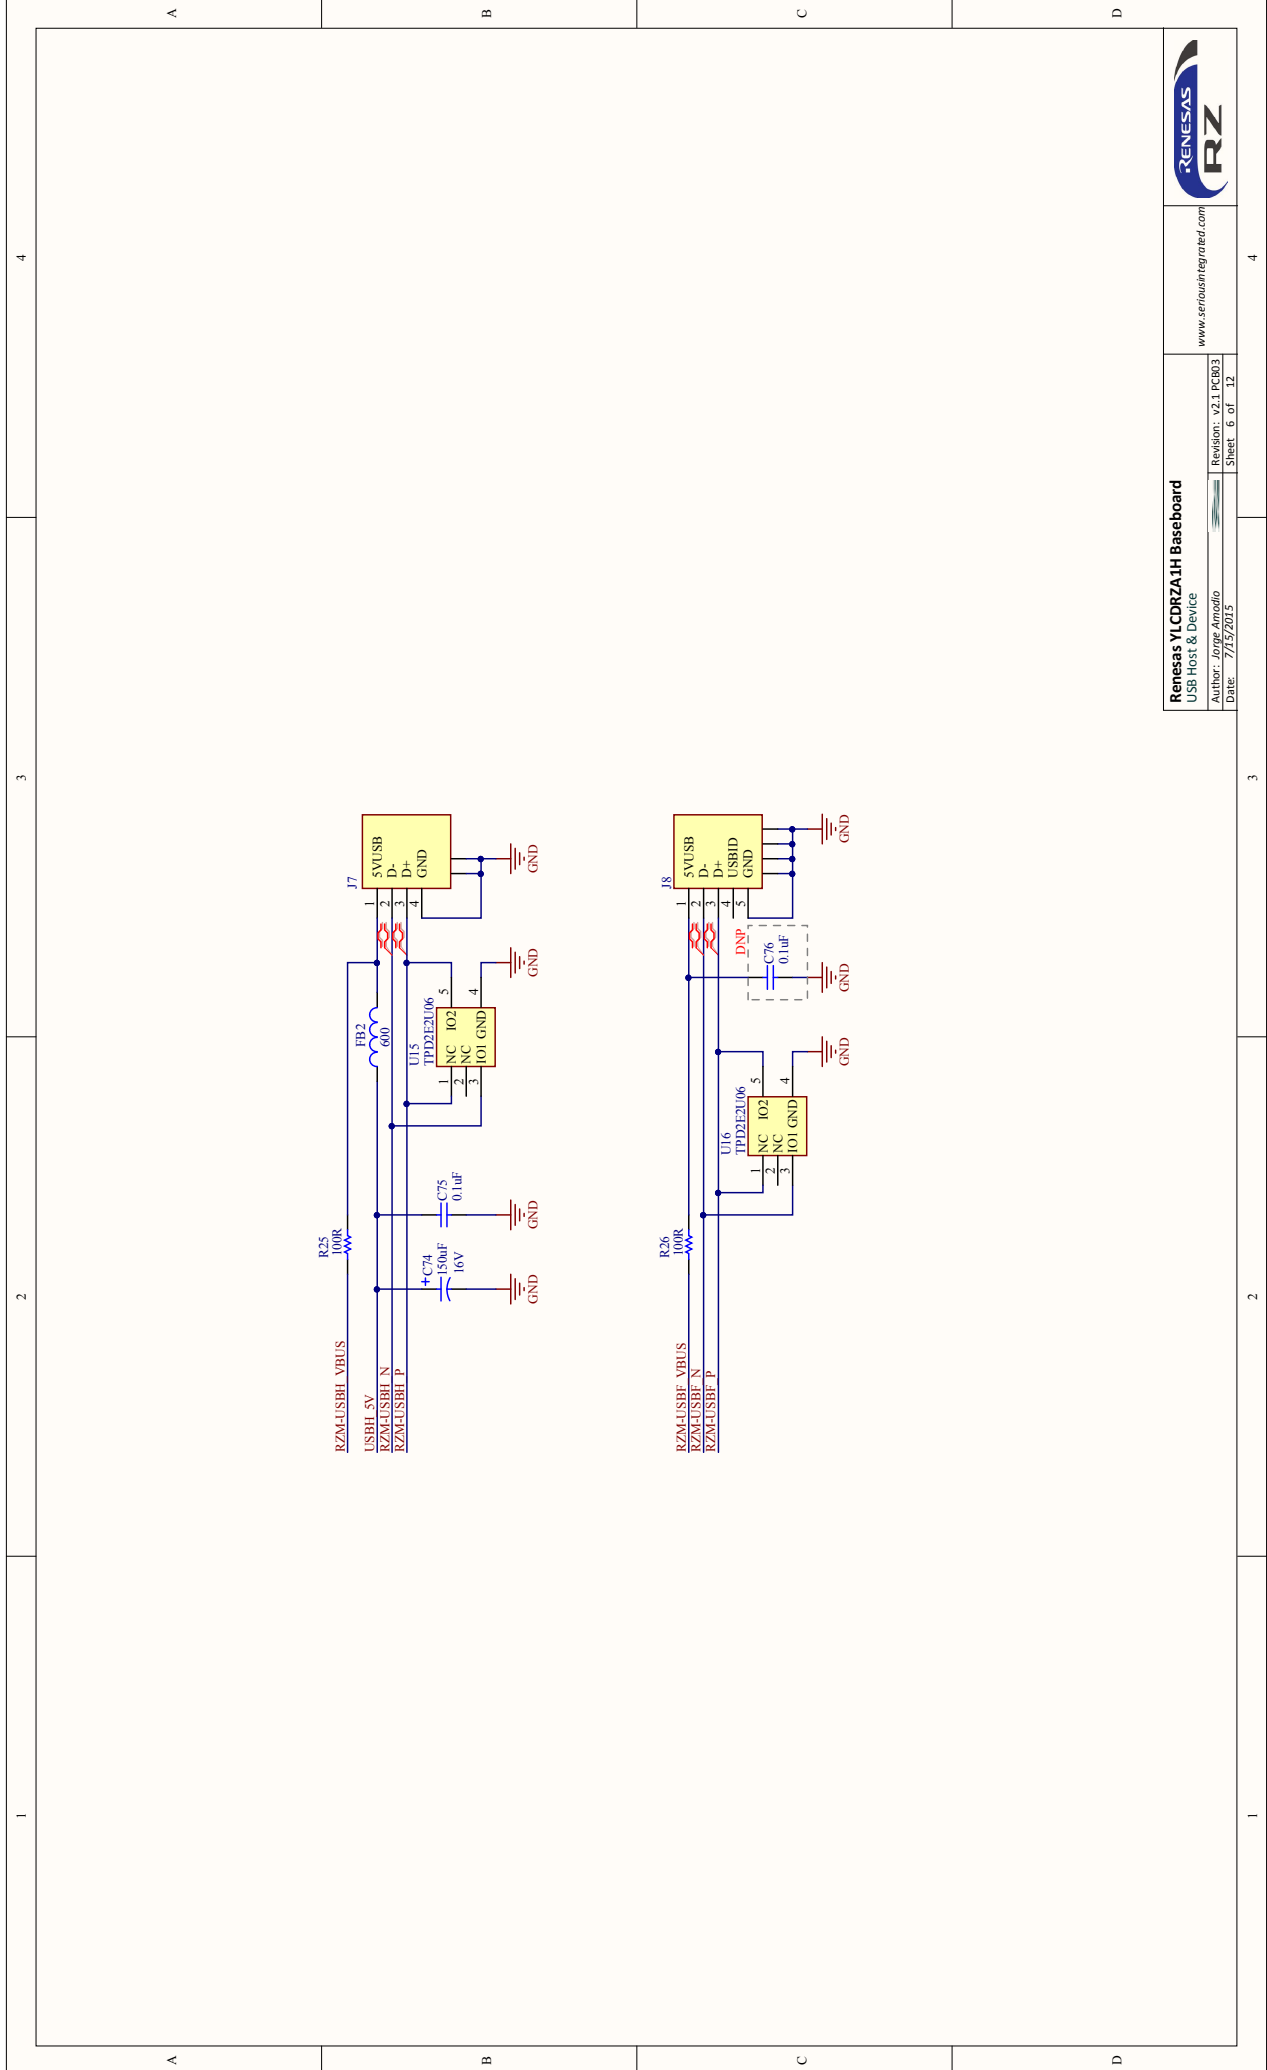





Author: Jorge Amodio


Product Code


Product Code



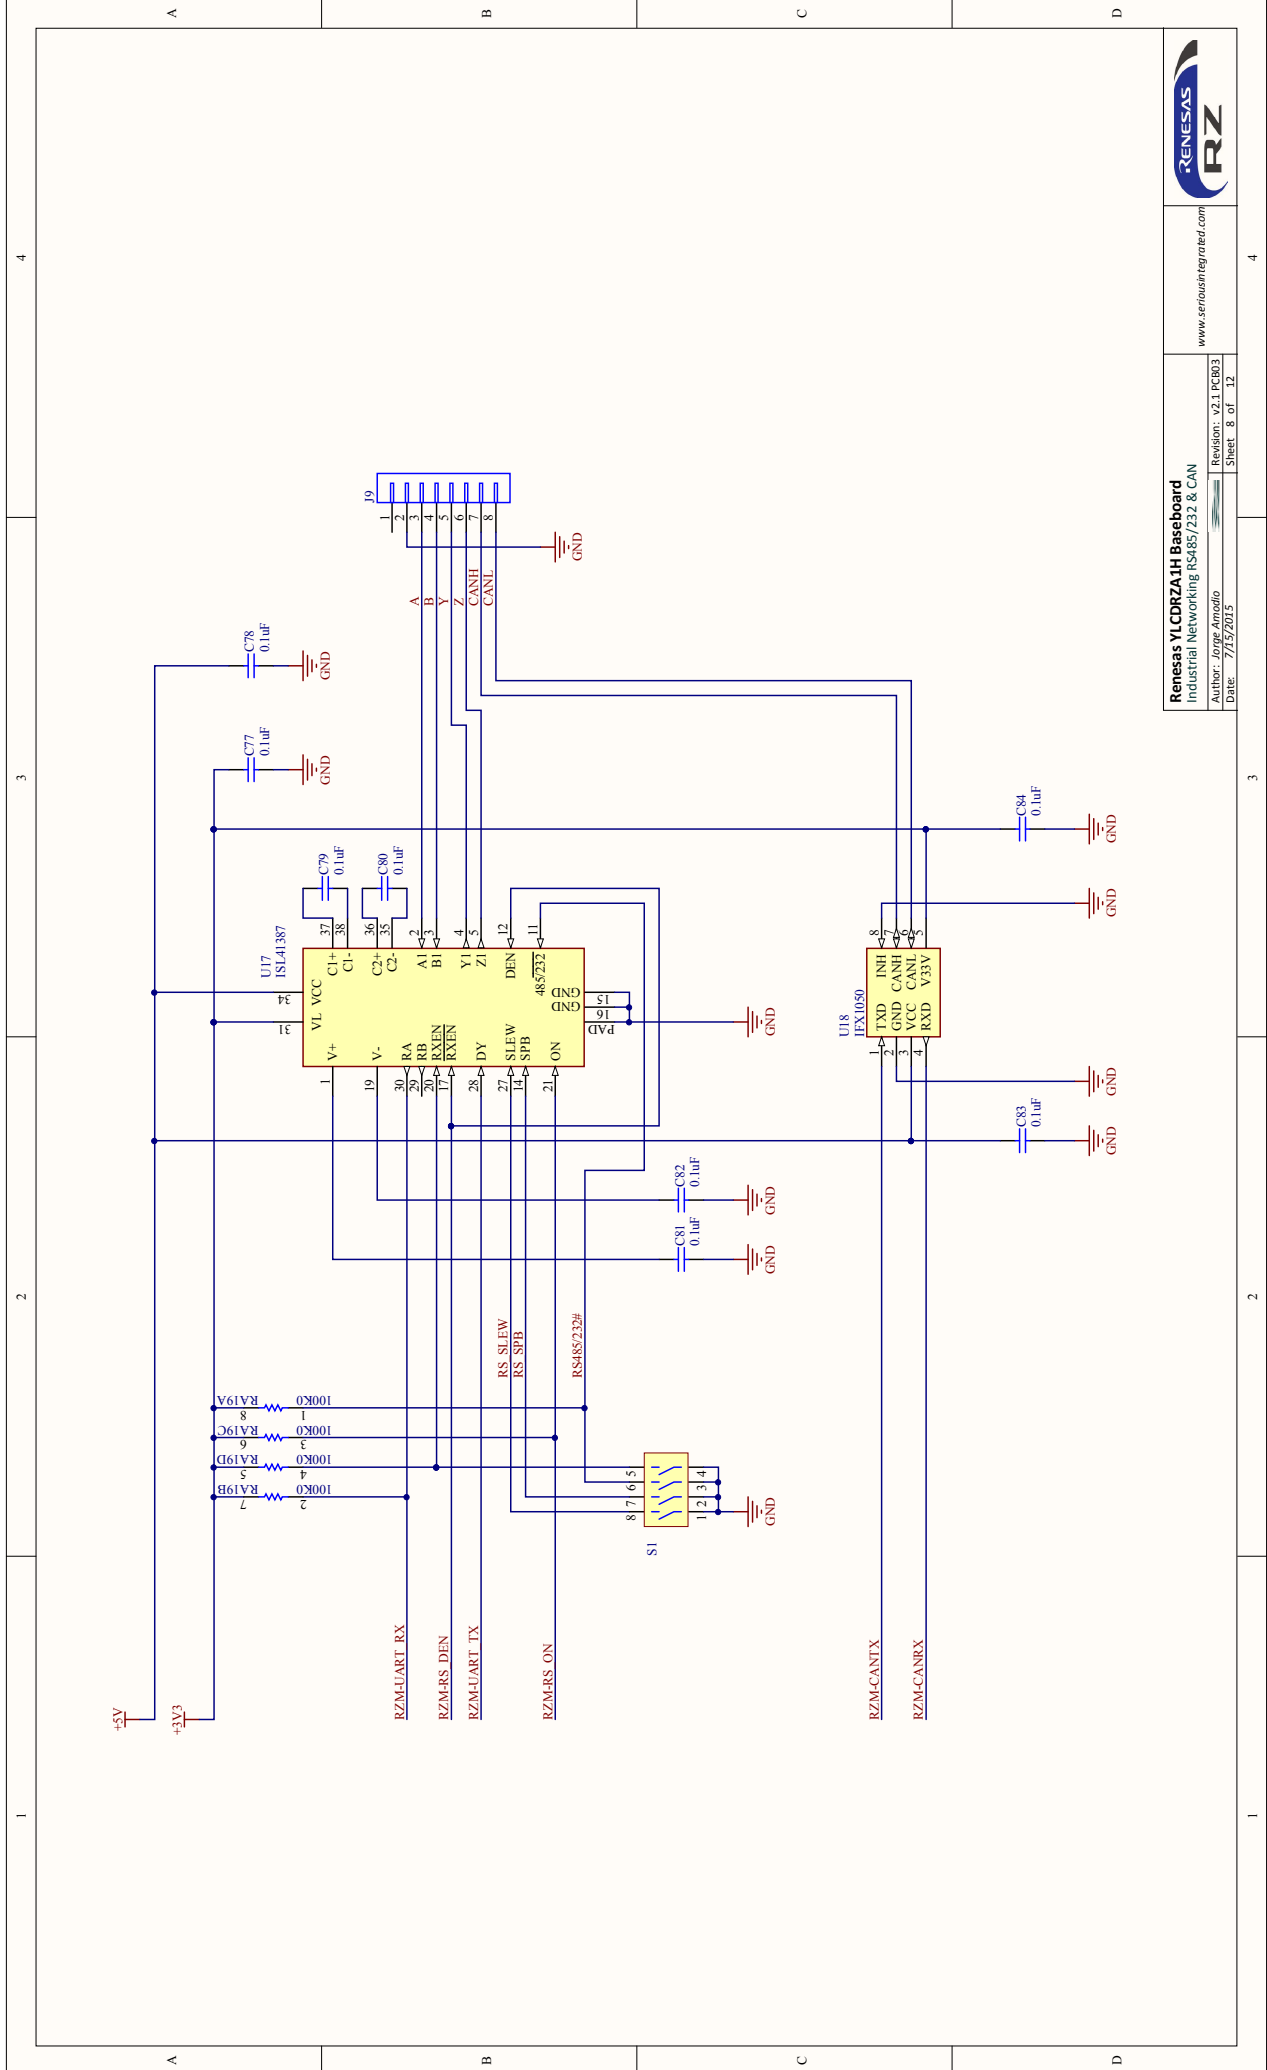


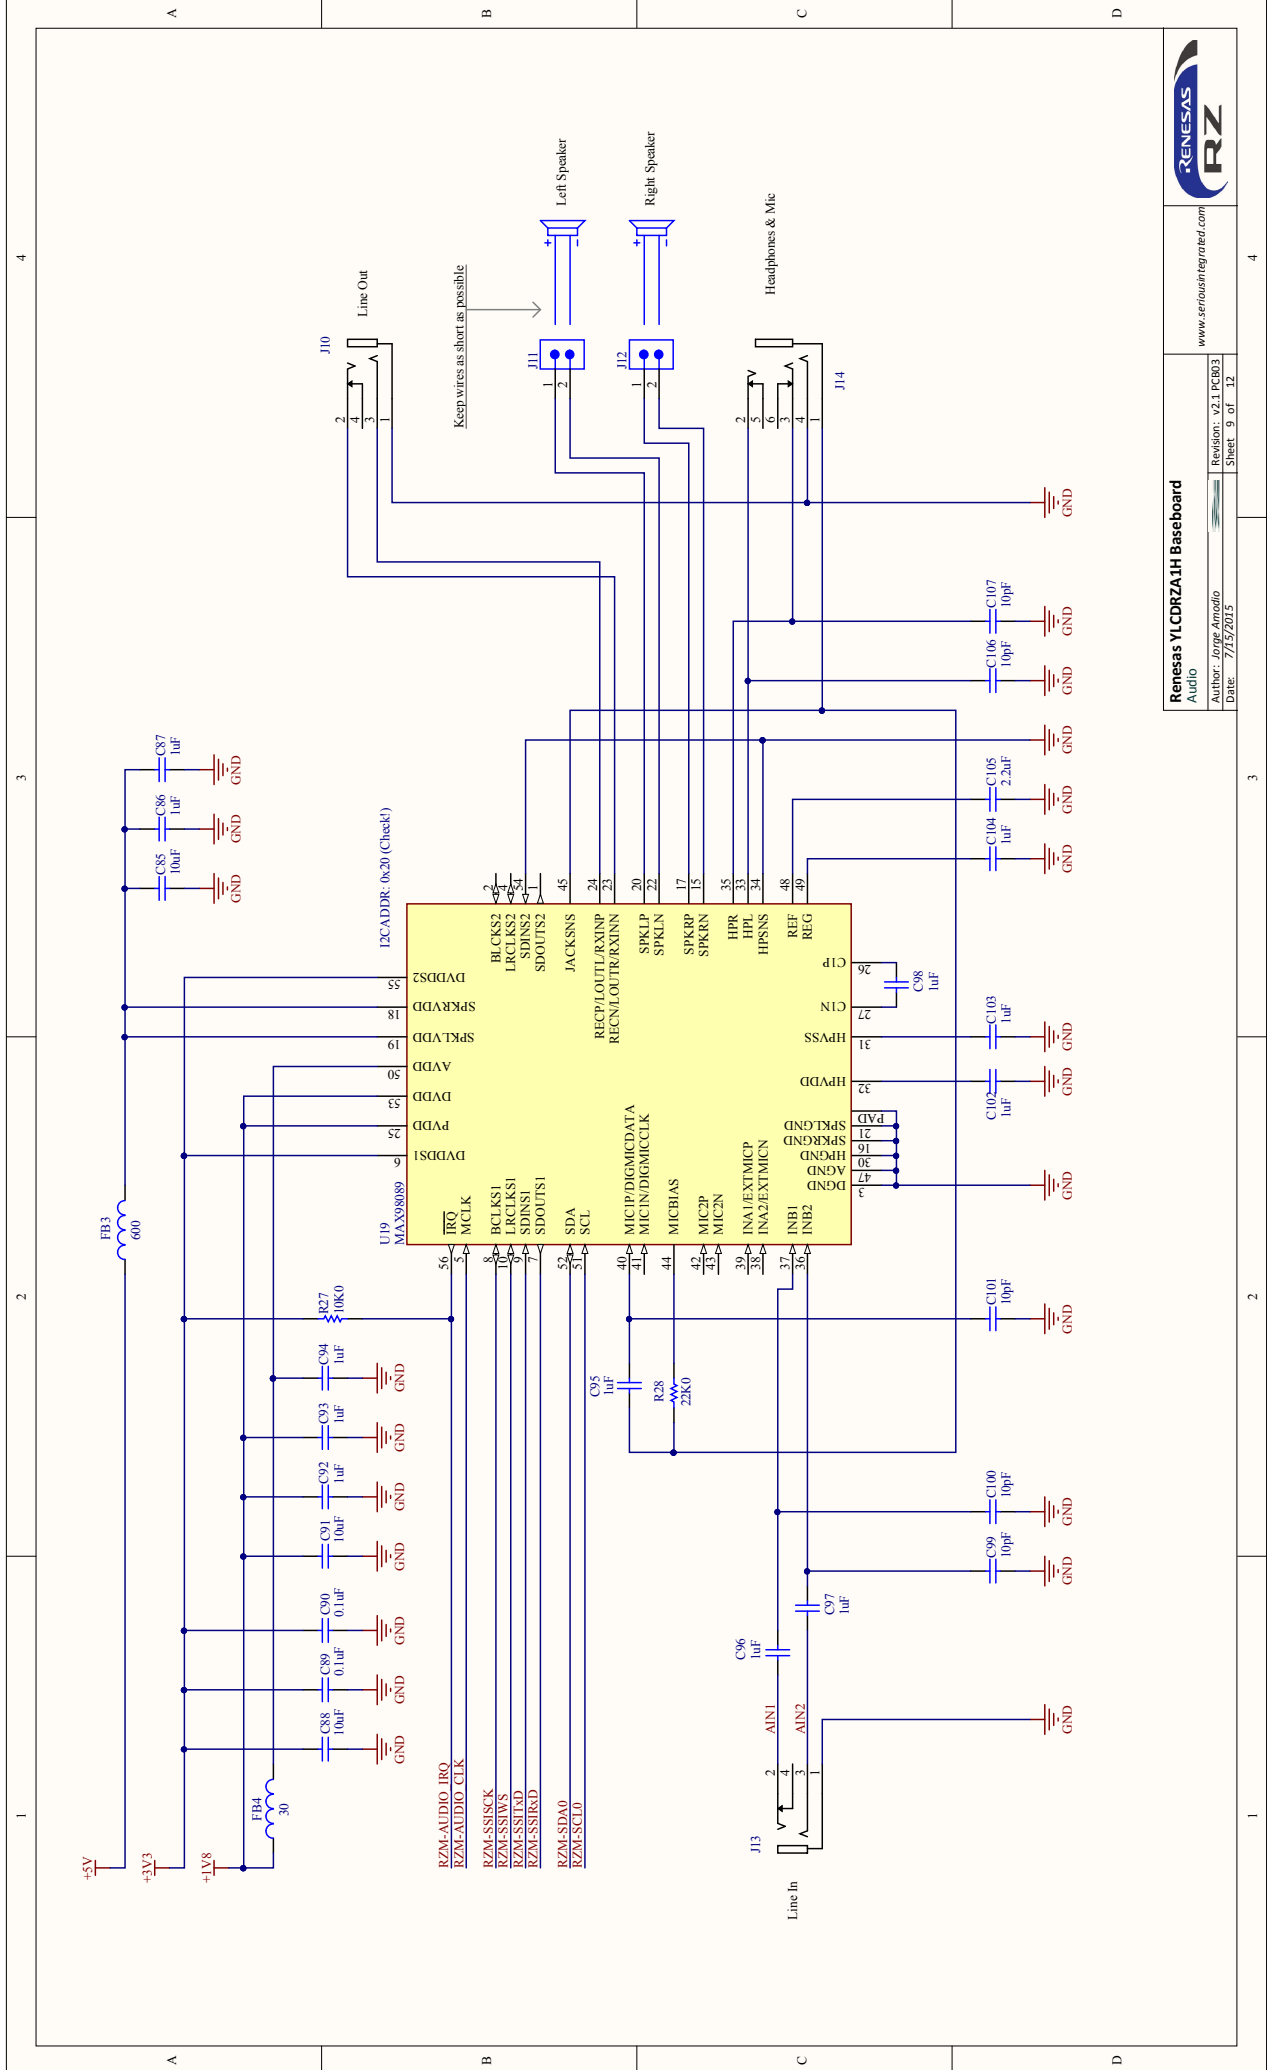

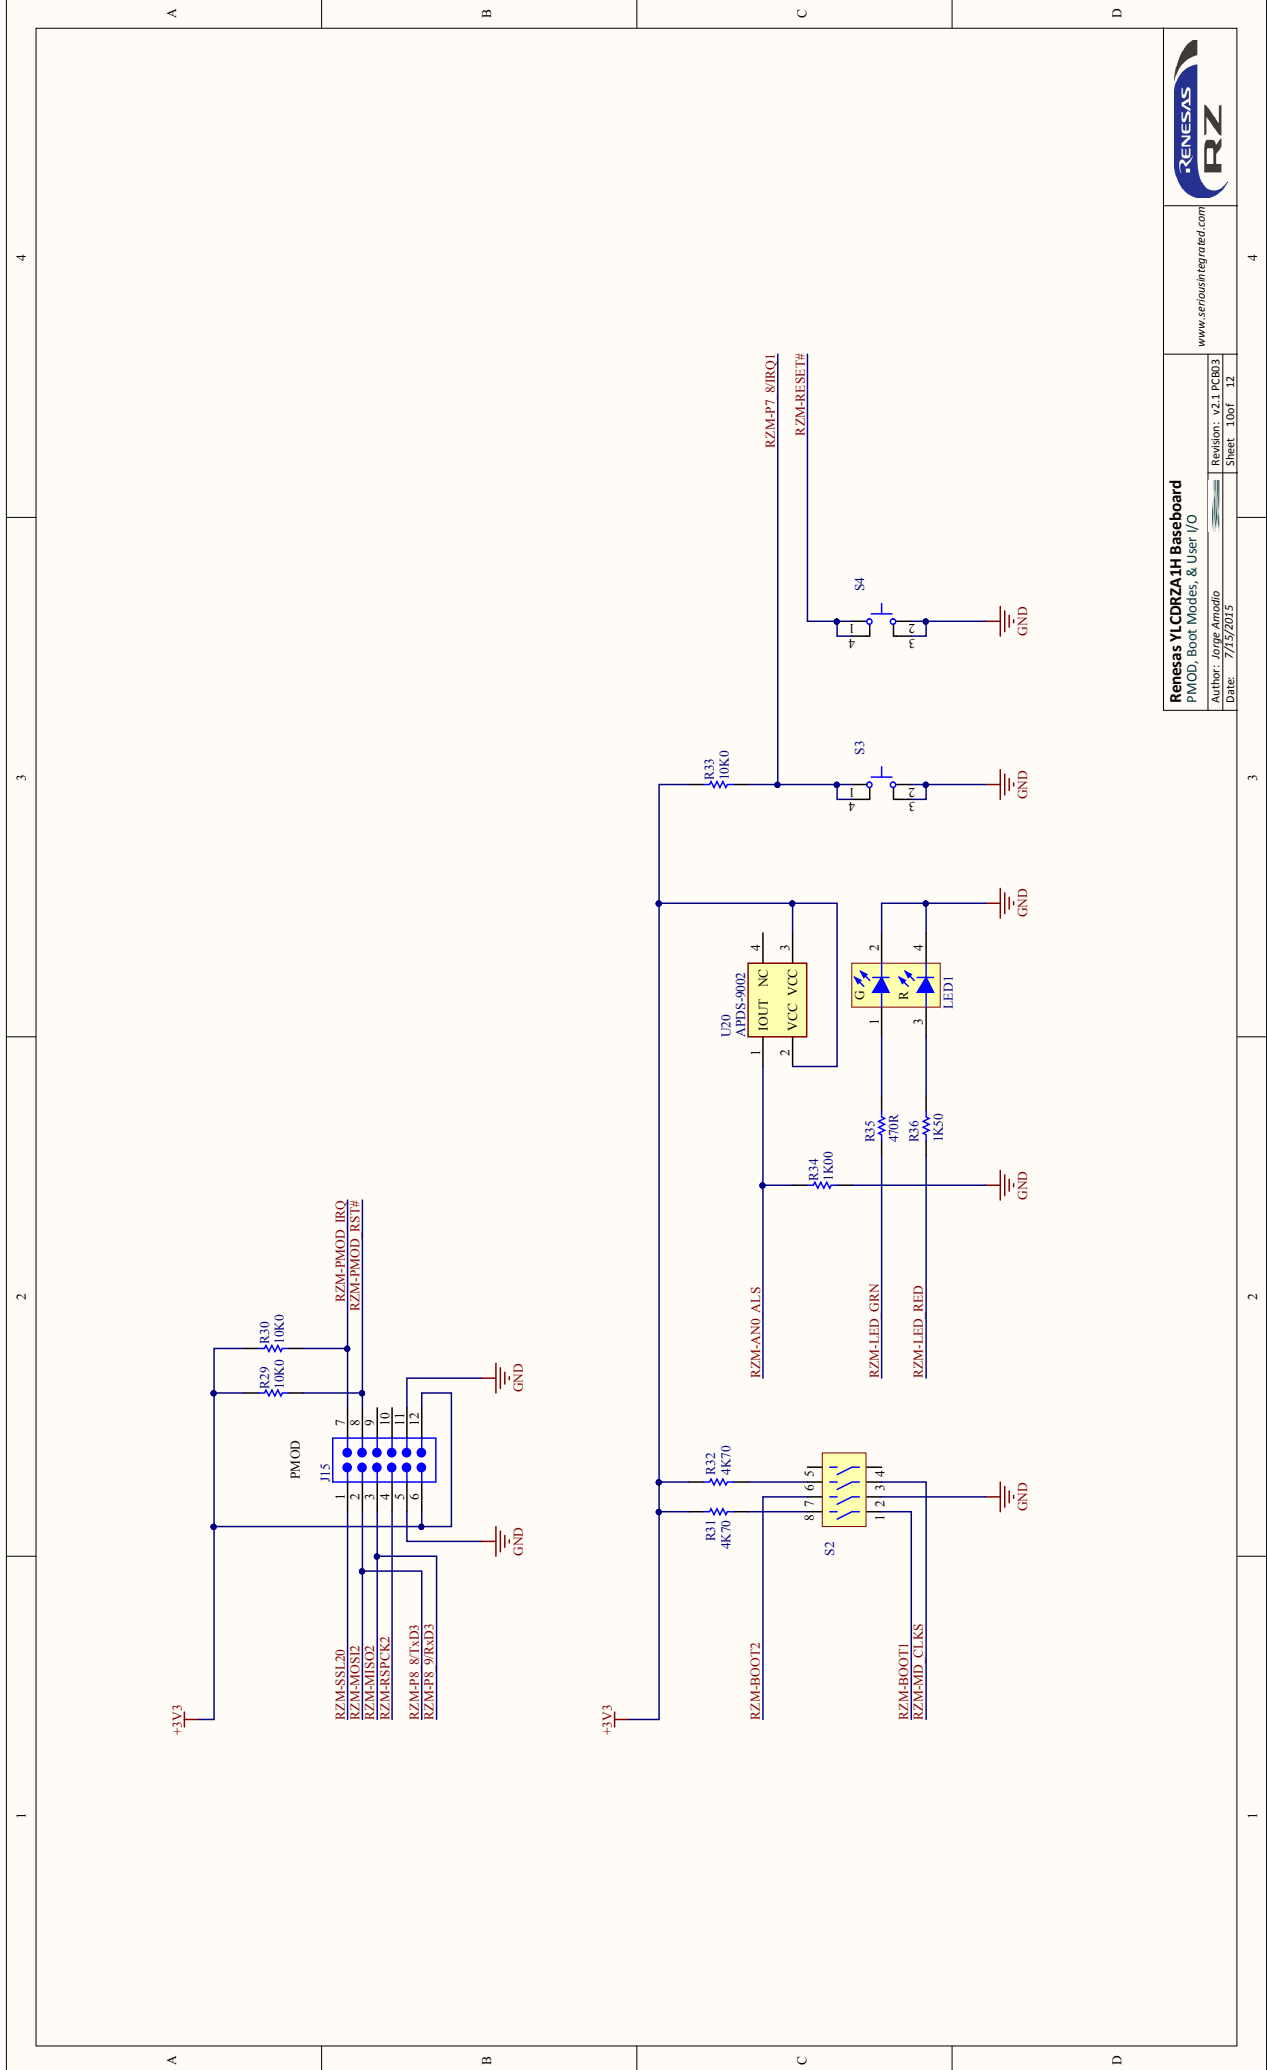

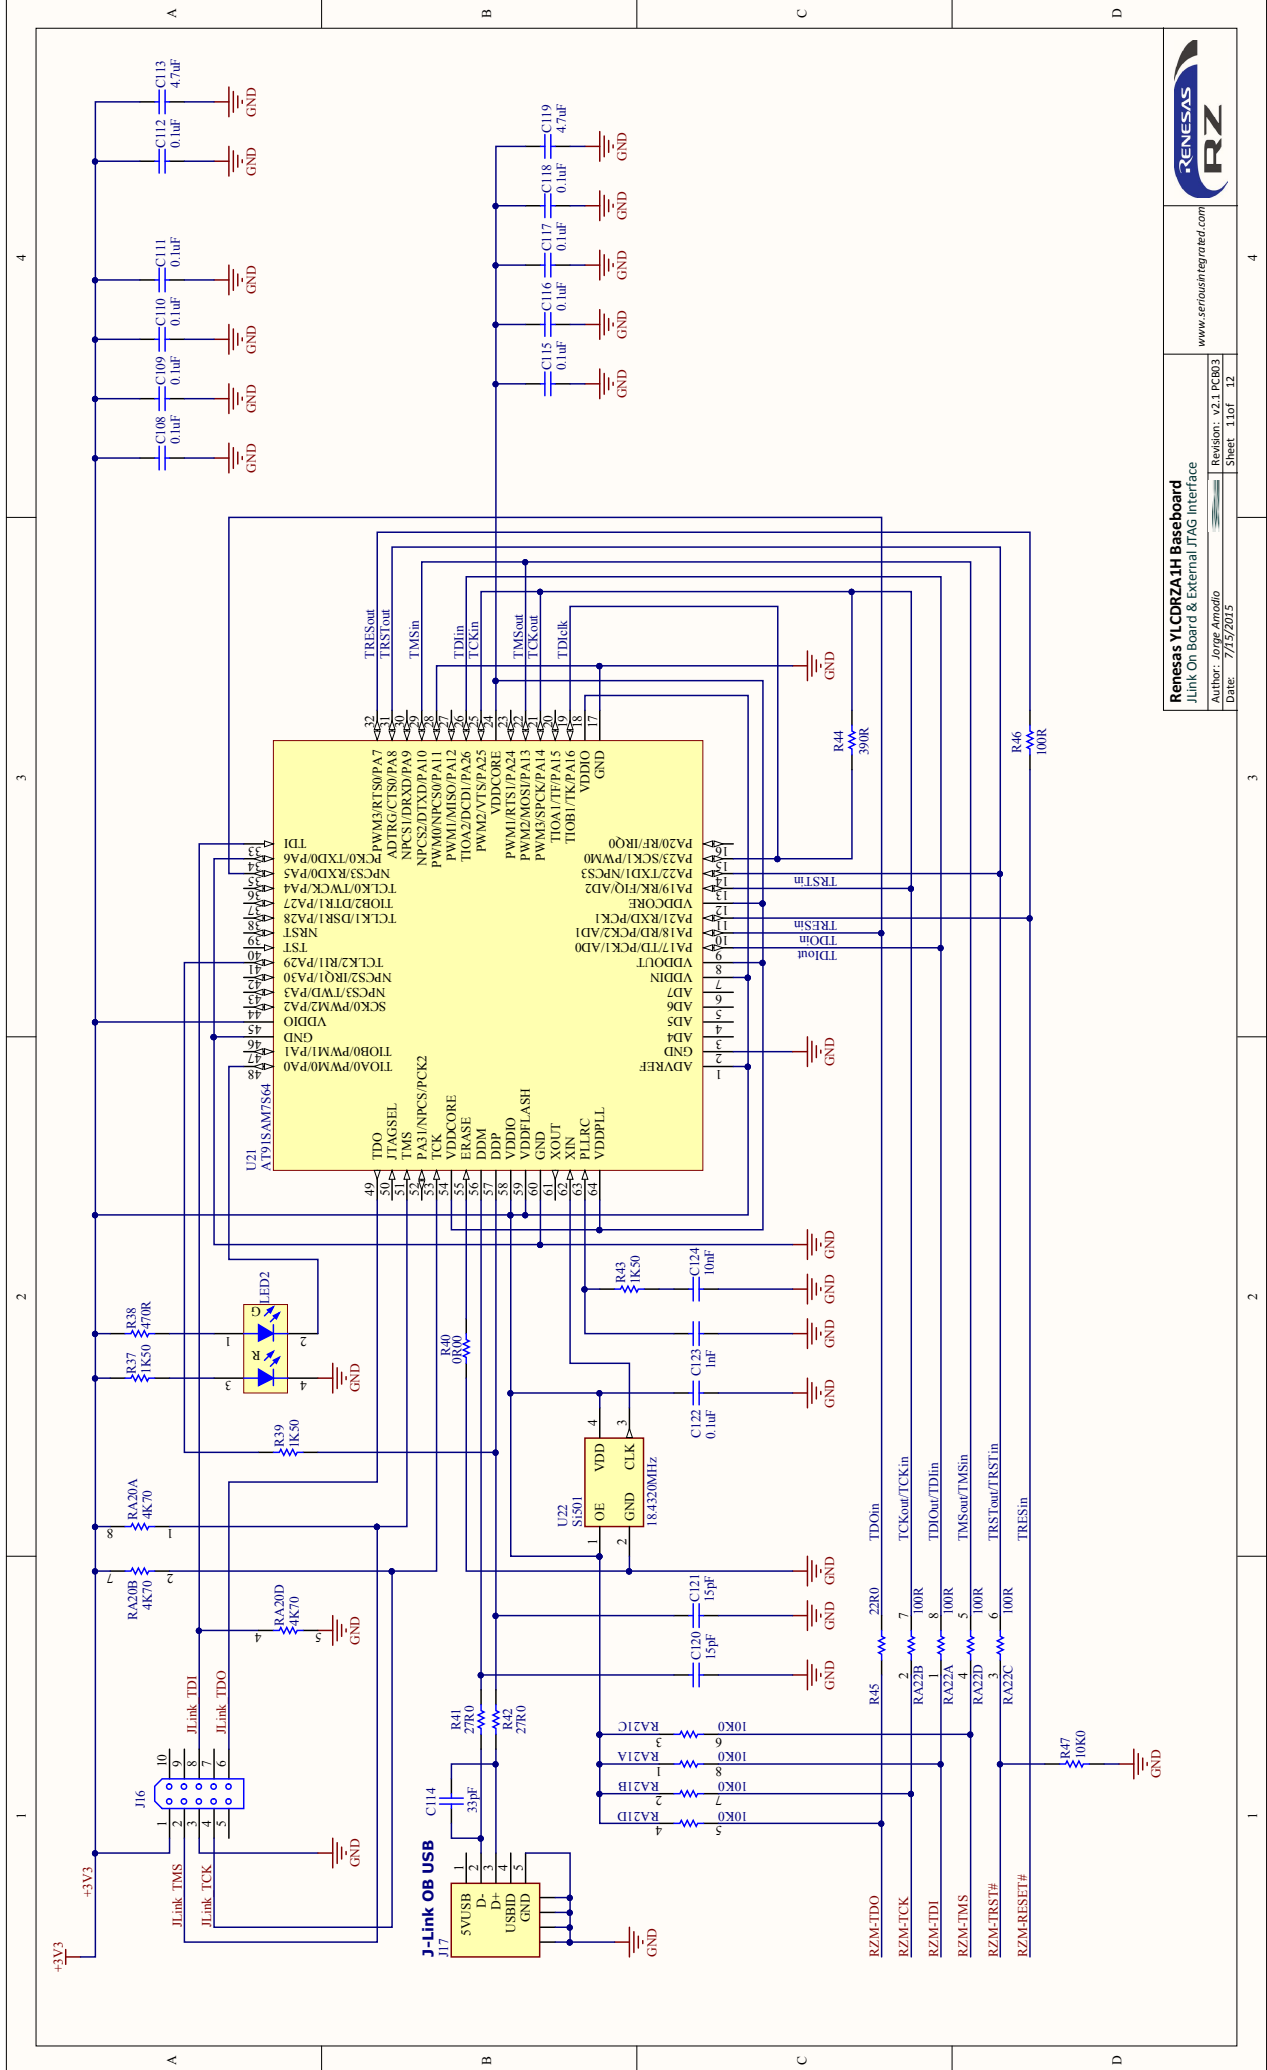

Board to Board connections via DDR2 SODIMM Socket

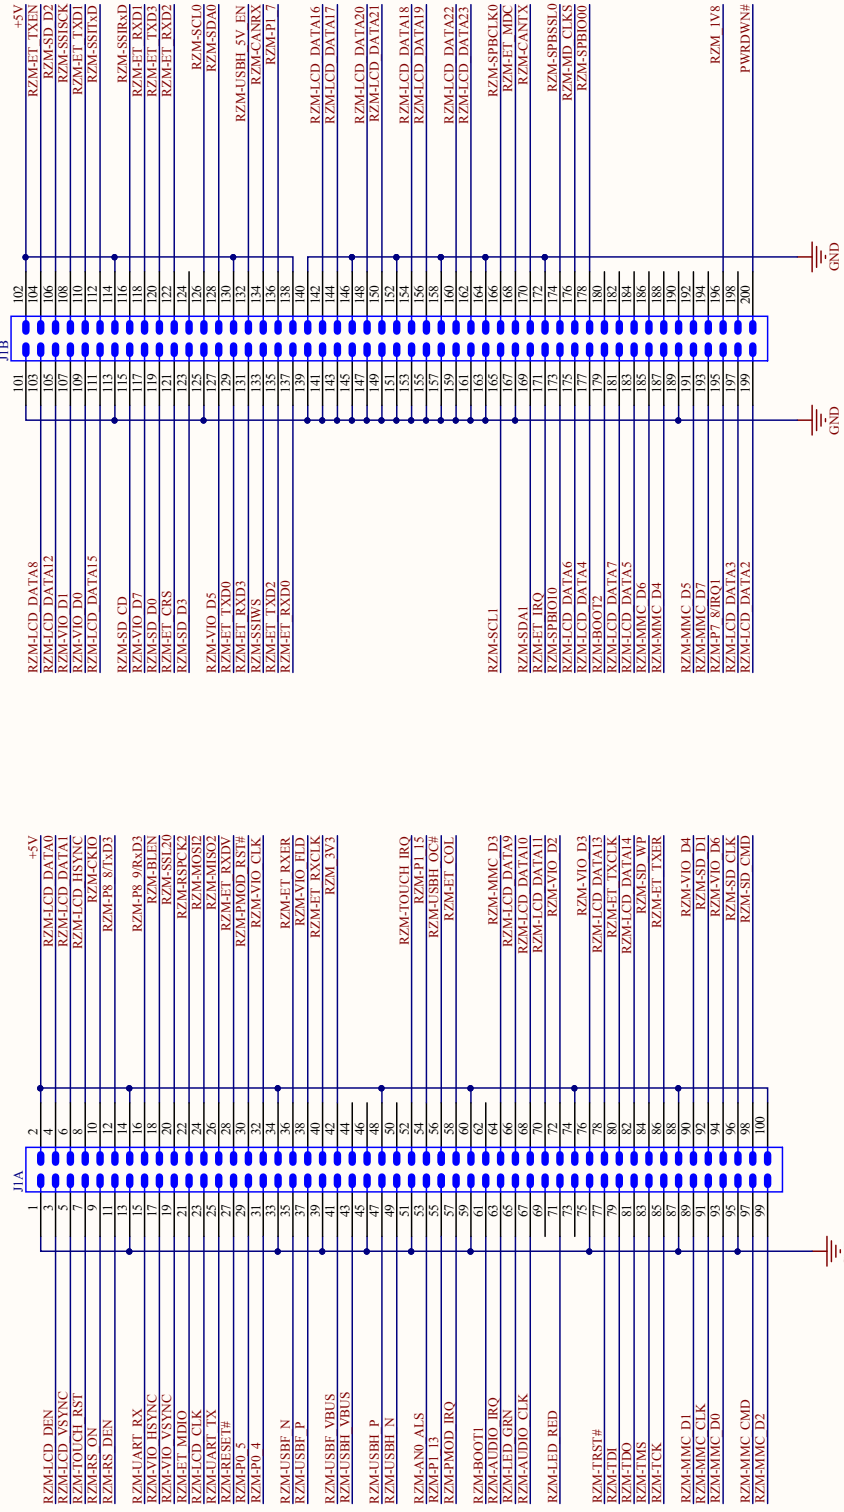

12.5 - Baseboard BOM

Designator	Qty	Description
BAT1	1	3030TR [Keystone] CR1025 SMD Coin Cell Holder
C1, C5, C60, C113, C119	5	CL05A475MQ5NQNC [Samsung] Ceramic 4u7 6V3 X5R 20%
C2, C3, C9, C27, C39, C40, C41, C42, C43, C44, C45, C46, C48, C49, C50, C51, C52, C53, C58, C59, C61, C63, C64, C66, C68, C69, C70, C71, C72, C75, C77, C78, C79, C80, C81, C82, C83, C84, C89, C90, C108, C109, C110, C111, C112, C115, C116, C117, C118, C122	50	CL03A104KP3NNNC [Samsung] Ceramic100n0 10V X5R 10%
C4, C7, C17, C65	4	CL10A226MQ8NRNC [Samsung] Ceramic 22uF 6.3V X5R 20%
C6, C16, C37, C88, C91	5	CL10A106KP8NNND [Samsung] Ceramic 10uF 10V 10% X5R
C8	1	CL05B271KB5NNNC [Samsung] Ceramic 270p 50V X7R 10%
C10, C11, C12	3	CL31A106KBHNNNE [Samsung] Ceramic 10u0 50V 10% X5R
C13	1	C1005X7R1H104K050BB [TDK] Ceramic 100n0 50V 10% X7R
C14, C30, C31	3	CL05B103KB5NNNC [Samsung] Ceramic 10n0 50V X7R 10%
C15	1	CL05C180JB5NNNC [Samsung] Ceramic 18p0 50V C0G 5%
C18	1	CL05A104KO5NNNC [Samsung] Ceramic 100n0 16V 10% X7R
C19	1	CL05B102KB5NNNC [Samsung] Ceramic 1n0 50V X7R 10%
C20, C114	2	CL05C330JB5NNNC [Samsung] Ceramic 33p0 50V 5% NP0
C21, C22, C23, C25, C34, C35	6	C1608X5R1H334M080AB [TDK] Ceramic 330n0 50V 20% X5R
C24, C36	2	CL21A226MAQNNNE [Samsung] Ceramic 22u0 25V 20% X5R
C26	1	C1608X7R1H224M080AB [TDK] Ceramic 220n0 50V 20% X7R
C28	1	CL05B471KB5NNNC [Samsung] Ceramic 470p0 50V 10% X7R
C29	1	CL05C220JB5NNNC [Samsung] Ceramic 22p0 50V 5% NP0
C32, C33, C47, C95, C96, C97	6	CL05A105KO5NNNC [Samsung] Ceramic1u0 16V X5R 10%
C38	1	CL31B105KBHNNNE [Samsung] Ceramic 1u0 50V 10% X7R
C54, C57, C73, C86, C87, C92, C93, C94, C98, C102, C103, C104	12	CL03A105MQ3CSNC [Samsung] Ceramic 1u0 6.3V 20% X5R
C55, C56, C62, C105	4	CL05A225MP5NNNC [Samsung] Ceramic 2u2 10V X5R 20%
C67	1	LMK316BJ476ML-T [Taiyo Yuden] Ceramic 47uF 10V 20% X5R
C74	1	TPSD157M016R0150 [AVX] Tant150uF 16V 20%
C76	0	CL03A104KP3NNNC [Samsung] Ceramic100n0 10V X5R 10%
C85	1	CL05A106MQ5NUNC [Samsung] Ceramic10uF 6.3V X5R 20%
C99, C100, C101, C106, C107	5	CL03C100DA3GNNC [Samsung] Ceramic 10p0 25V C0G/NP0 +/-0.5pF
C120, C121	2	C0603C0G1E150J030BA [Murata] Ceramic 15p0 25V C0G 5%
C123	1	CL03B102KA3NNNC [Samsung] Ceramic 1n0 25V 10% X7R
C124	1	CL03A103KP3NNNC [Samsung] Ceramic 10n0 10V 10% X5R
D1, D2, D3, D4	4	RB481KTL [Rohm] Dual Schottky Diode 30V
D5	1	B240A-13-F [Diodes Inc] Schottky 40V 2A
D6	1	DFLS130L-7 [Diodes Zetex] Schottky Diode 30V 310mV@1A
FB1	1	BLM21AG121SN1D [Murata] Ferrite Beads120Ohm 25% 100MHz 800mA
FB2, FB3	2	CIM05U601NC [Samsung] Ferrite Bead 600 Ohm 300mA 0402
FB4	1	CIS10P300AC [Samsung] Ferrite Bead 30R0 6A
J1	1	1473005-4 [TE] 200Pos RA DIMM Socket 0.6mm pitch
J2	1	RASM722PTR13X [Switchcraft] RA, 2.1mm 5A SMT, T/R

J3	1	XF2W-4015-1A [Omron] 40pos 0.5mm pitch FFC Dual
J4	1	XF2W-0815-1A [Omron] 8pos 0.5mm pitch FFC
J5	1	08B0-1X1T-36-F [Bel] MagJack 10/100 AutoMDIX LED G/Y TH
J6	1	CES-109-01-T-D [Samtec] 18pos/2x9 ST F 2.54mm Hdr
J7	1	USB-A-S-F-B-SM2-R-TR [Samtec] USB A 2.0 4Pin
J8, J17	2	10118192-0001LF [FCI] USB Micro B Full SMT
J9	1	20020110-C081A01LF [FCI] Term Block 8pos/1x8 M 3.5mm RA TH
J10	1	SJ-3524-SMT-TR-GR [CUI] 3.5mm SMT Audio Jack Green
J11, J12	2	SM02B-GHS-TB(LF)(SN) [JST] 2Pos/1x2 1.25mm RA
J13	1	SJ-3524-SMT-TR-BE [CUI] 3.5mm SMT Audio Jack Blue
J14	1	SJ-43516-SMT-TR-PI [CUI] 3.5mm SMT Audio Jack Pink/Red
J15	1	SSW-106-02-F-D-RA [Samtec] 2x6 RA 0.1" F Header
J16	0	TC-2050 PCB [Tag-Connect] 10pos/2x5 *NO PART PADS ONLY*
L1	1	SRU1028-100Y [Bourns] 10uH Shielded 2.8A 45mOhm 10x10x2.8mm
L2, L4	2	SRN3015-2R2M [Bourns] 2.2uH 1.8A 72mOhm Inductor
L3	1	SRN3015-1R0Y [Bourns] 1uH 2.35A Inductor 3x3x1.5mm
L5	1	SRR6028-3R9Y [Bourns] Shielded 3.9uH 2.45A SMD Coil
L6	1	SRR5028-220Y [Bourns] 22uH 1.15 30% 120mOHM,5.8x5.8x2.8mm
LED1, LED2	2	598-8610-207F [Dialight] LED BiColor Red/Green 60/40mcd
R1, R4, R5, R18, R19, R27, R29, R30, R33, R47	10	ERA-2AED103X [Panasonic] 10K 0.5% 1/16W 25ppm
R2	1	ERJ-2RKF3742X [Panasonic] 37k4 1% 1/10W 100ppm
R3	1	ERJ-2RKF1871X [Panasonic] 1k87 1% 1/10W 100ppm
R6	1	ERJ-2RKF1803X [Panasonic] 180K Ohm 1% 1/10W ±100ppm
R7	1	ERJ-2RKF2553X [Panasonic] 255k0 1% 1/10W 100ppm AEC-Q200
R8, R9, R10	3	ERJ-2RKF4993X [Panasonic] 499k 1% 1/10W 100ppm
R11	1	ERJ-2RKF1004X [Panasonic] 1m00 1% 1/10W 100ppm
R12	1	ERJ-2RKF7502X [Panasonic] 75k0 1% 1/10W 100ppm
R13	1	ERJ-2RKF5622X [Panasonic] 56k2 1% 1/10W 100ppm
R14	1	ERJ-2RKF3302X [Panasonic] 33k0 1% 1/10W 100ppm
R15	1	ERJ-2RKF6652X [Panasonic] 66k5 1% 1/10W 100ppm
R16	1	NRC04F1101TRF [NIC] 1k1 1/16W 1% 0402
R17	1	CRCW04023R00FKED [Vishay] 3R00 1% 1/16W 100ppm
R20, R45	2	ERJ-2RKF22R0X [Panasonic] 22R0 1% 1/10W 100ppm
R21	1	ERJ-2RKF2201X [Panasonic] 2k2 1% 1/10W 100ppm
R22, R23	2	ERJ-2RKF2200X [Panasonic] 220R 1% 1/10W 100ppm
R24	1	ERJ-2RKF6491X [Panasonic] 6k49 1% 1/10W 100ppm
R25, R26, R46	3	ERA-2AED101X [Panasonic] 100R 0.5% 1/16W 25ppm
R28	1	ERA-2AED223X [Panasonic] 22k0 0.5% 1/16W 25ppm
R31, R32	2	ERA-2AED472X [Panasonic] 4k70 0.5% 1/16W 25ppm
R34	1	ERA-2AED102X [Panasonic] 1k00 0.5% 1/16W 25ppm
R35, R38	2	ERA-2AED471X [Panasonic] 470R 0.5% 1/16W 25ppm
R36, R37, R39, R43	4	ERA-2AED152X [Panasonic] 1K50 0.5% 1/16W 25ppm
R40	1	CRCW04020000Z0ED [Vishay] 0R00 1/16W
R41, R42	2	ERJ-2RKF27R0X [Panasonic] 27R0 1% 1/10W 100ppm
R44	1	ERJ-2RKF3900X [Panasonic] 390R 1% 1/10W 100ppm

RA1, RA19	2	EXB-28V104JX [Panasonic] IsolArr 100k0 5% 200ppm 1/16W 4x040
RA2, RA3, RA4, RA5, RA6, RA7, RA8, RA15, RA16, RA17	10	EXB-28V330JX [Panasonic] IsolArr 33R0 4x 5% 200ppm 1/16W
RA9, RA10	2	EXB-28V223JX [Panasonic] IsolArr 22k0 4x 5% 200ppm 1/16W
RA11, RA12	2	EXB-28V473JX [Panasonic] IsolArr 47k0 4x 5% 200ppm 1/16W
RA13	1	EXB-28V220JX [Panasonic] IsolArr 22R0 4x 5% 200ppm 1/16W
RA14, RA18, RA20	3	EXB-28V472JX [Panasonic] IsolArr 4k7 5% 200ppm 1/16W 4x0402
RA21	1	EXB-28V103JX [Panasonic] IsolArr 10k0 5% 200ppm 1/16W 4x0402
RA22	1	EXB-28V101JX [Panasonic] IsolArr 100R 4x 5% 200ppm 1/16W
S1, S2	2	219-4LPSTR [CTS] DIP Switch 4Pos 2.54mm
S3, S4	2	KSC222J LFS [C&K] Sealed PB Switch 6.2x6.2mm
SD1	1	10067847-001RLF [FCI] SDCard Socket
SO3, SO4, SO5, SO6	4	SMTSO-M4-6ET [PEM] M4 6.0mm Standoff
U1	1	P9122-S2NBGI [IDT] Switcher w/I2C Dual Fact Pgm 1.8, 3.30
U2	1	TPS54232D [TI] Buck Regulator 28V 2A
U3	1	TPS501DRCR [TI] USB Boost Power Controlller SON10
U4	1	74LVC1G157GV [NXP] Single 2-Input Multiplexer
U5	1	TPS65150RGER [TI] LCD 3-output LCD power controller
U6	1	CAT4139TD-GT3 [OnSemi] LED Backlight Driver
U7	1	DS90CF383BMTX/NOPB [TI] RGB888 to LVDS 65MHz Serializer
U8	1	MTFC4GMDEA-4M IT [Micron] 4GByte eMMC 3v3
U9	1	PCF8523TK/1,118 [NXP] Real Time Clock
U10	1	ATSHA204-MAHDA-T [Atmel] CryptoAuthentication Chip
U11	1	KSZ8081MNXCA TR [Micrel] Ethernet 10/100 MII PHY
U12	1	501AAA25M0000DAGR [SiLabs] 25MHz Oscillator 50ppm 2x2.5mm
U13	1	24AA02E48T-I/OT [Microchip] EEPROM EUI48 MAC I2C
U14	1	501AAA24M0000DAGR [SiLabs] 24MHz Oscillator 50ppm 2x2.5mm
U15, U16	2	TPD2E2U06DRLR [TI] ESD Transient Suppressor Dual 30kV
U17	1	ISL41387IRZ-T [Intersil] RS232/RS485 Dual Mode Transceiver
U18	1	IFX1050GVIOXUMA1 [Infineon] CAN Transceiver 1MBaud
U19	1	MAX98089ETN+ [Maxim] Audio Codec/Amplifier
U20	1	APDS-9002-021 [Avago] Ambient Light Sensor
U21	1	AT91SAM7S64C-MU [Atmel] MCU
U22	1	501AAA18M4320DAGR [SiLabs] 18.432MHz Osc 50ppm 2x2.5mm
X1	1	ABS07-32.768KHZ-T [Abracon] 12.5pF 20ppm


Chapter 13 - Post Production Modifications

13.1 – I/O Baseboard v2.0


The I/O Baseboard v2.0 has the following post-production modification to address the issue described in the [5.5 - USB Host Power Subsystem](#) section:

On v2.0 units, P1.6 was incorrectly used to drive the USB Host Power Enable (RZM-USBH_5V_EN on the RZ Module; DIMM pin 132). This port is open drain only on the MCU, and is incapable of driving high and enabling the power supply. All v2.0 units should include a post-production modification connecting U21 pin 7 (ENUSB) to U21 pin 8 (FAULT#) to enable the USB supply during all non-overcurrent situations.

The unmodified v2.0 units have U21 (near the USB Host A Connector) like this:

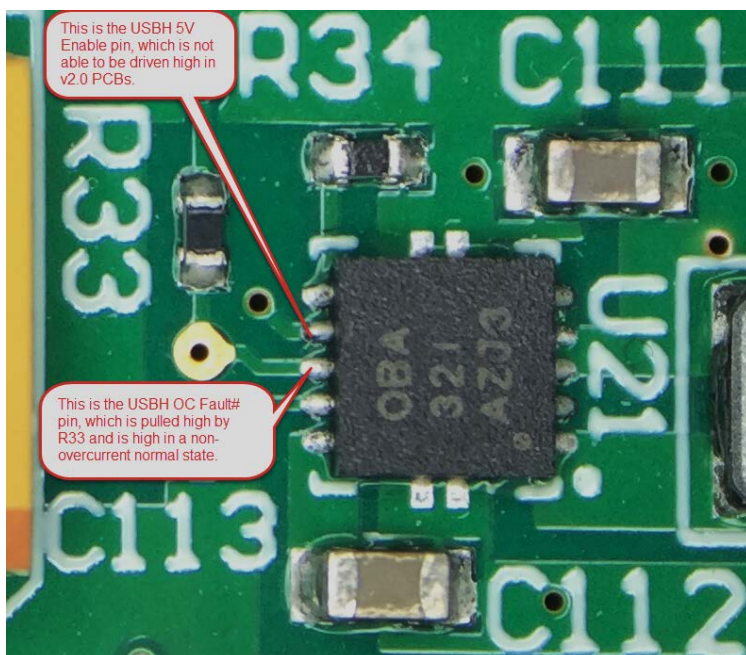

The modified 2.0 units have the two pins 7 and 8 shorted as described above:

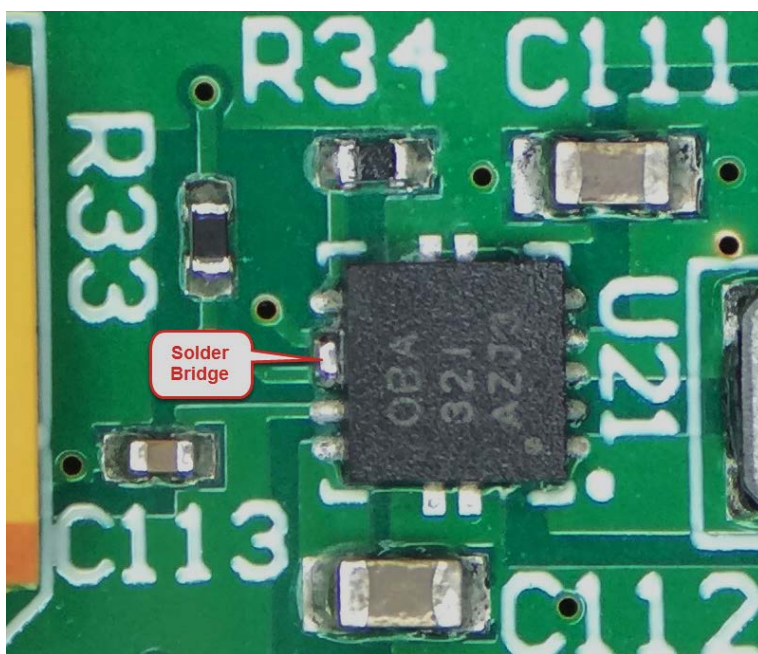

Chapter 14 - Additional Information

Further information available for this product can be found on the Renesas website at:

<http://am.renesas.com/HiResGUI>

General information on Renesas Microcontrollers can be found on the global Renesas website:

<http://www.renesas.com/>



Renesas Electronics America, Inc.
2801 Scott Boulevard
Santa Clara, CA 95050-2554, US