
CUSTOMER DRAWING

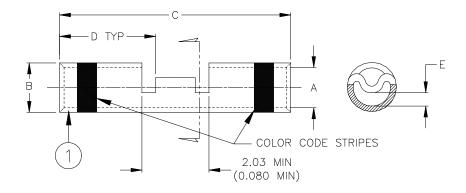

| Prod. Rev | | | | | | | | Max | Color | Useable |
|-----------|---|---------|---------------------|---------------------|------------|------------|---------|----------|--------|-------------|
| Product | | Nom | А | В | C ±0.25 | D ±0.25 | Е | Weight | Code | CMA |
| Name | | Size | | | (C ±0.010) | (D ±0.010) | max | Lbs./mpc | | |
| D-609-09 | В | 26 - 20 | <u>1.27 (0.050)</u> | 2.03 (0.080) | 12.7 | 5.97 | 0.381 | 0.61 | Red | 304 - 1510 |
| | | | 1.13 (0.045) | 1.90 (0.075) | (0.500) | (0.235) | (0.015) | | | |
| D-609-10 | В | 20 - 16 | <u>1.75 (0.069)</u> | <u>2.69 (0.106)</u> | 14.61 | 6.86 | 0.51 | 1.17 | Blue | 779 - 2680 |
| | | | 1.62 (0.064) | 2.56 (0.101) | (0.575) | (0.270) | (0.020) | | | |
| D-609-11 | В | 16 - 12 | <u>2.59 (0.102)</u> | <u>3.89 (0.153)</u> | 14.61 | 6.86 | 1.27 | 2.30 | Yellow | 1900 - 6755 |
| | | | 2.46 (0.097) | 3.73 (0.147) | (0.575) | (0.270) | (0.050) | | | |

MATERIAL

1. CRIMP SPLICER: Base Metal - Copper Alloy 101 or 102 per ASTM B 75. Plating: Ductile Nickel per QQ-N-290. Color Code Stripes: per table of dimensions.

APPLICATION

1. Parts shall be of seamless tubular construction.

2. Acceptance sampling shall be in accordance with Paragraph 4 of MIL-S-81824.

3. Packing and packaging shall be in accz

ordance with Section 5, Level C, of MIL-S-81824.

| TE Connectivity | | | | | Raychem Devices | TITLE: COLOR CODED CRIMP SPLICER, IN-LINE, NICKEL PLATED | | | | |
|---|------------------|--------------------|--|----------------------------|--|--|----------------|------------------|------------------|--|
| UNLESS OTHER INCHES DIMENS | | | | IONS ARE IN MIL ACKETS. | DOCUMENT NO. D-609-09/-10/-11 | | | | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | ROUGHNESS IN eva | | | drawing at any time | es the right to amend e. Users should of the product for their | DATE: 30-Aug | 2017 | DOC ISSUE: B1 | | |
| DRAWN BY: M. FOROND | РА | CAGE CODE 06090 | | REPLACES: N/A | ECO NO: ECO-17-012788 | PROD. REV.: SEE TABLE | SCALE: None | SIZE: A | SHEET: 1 of 1 | |

© 2004-2017 TE Connectivity Corporation. All rights reserved. If this document is printed it becomes uncontrolled. Check for the latest revision.