


**UNCONTROLLED DOCUMENT**

**RoHS**

IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	121 Ω	231 Ω	352 Ω
Minimum	- Ω	185 Ω	- Ω

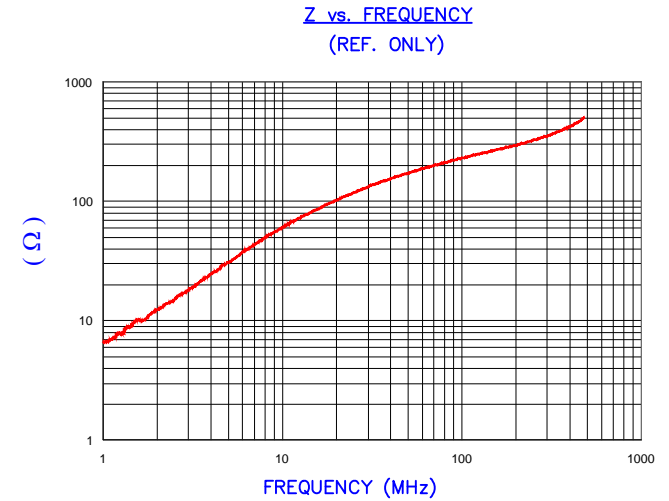

AGILENT E4991A Impedance/Material Analyzer  
HP 16092A Test Fixture,


FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	7.80 [.307]	±	0.30 [.012]
B	3.00 [.118]	±	0.25 [.010]
C	19.00 [.748]	±	0.60 [.024]

WEIGHT/1000 3.75 Kgs. 8.27 Lbs.

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

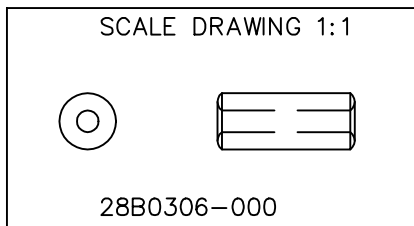

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:				
				28B0306-000	A	BEAD	JRK
				DATE: 07/31/09	SCALE: 3 : 1	MATERIAL:	
A	ORIGINAL DRAFT	07/31/09	JRK	CAD # 28B0306-000-A	TOOL # B0306	Ferrite	
REV	DESCRIPTION	DATE	INT				