Part Curves Page 1 of 3

Steward

Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales


CM5740Z241B-00


STEWARD PART NUMBERING SYSTEM

CM 5441 Z 990 B - 00

PRODUCT PART RATED IMPEDANCE PACKAGING ADDITIONAL SERIES CODE SIZE CODE CURRENT CODE VALUE CODE CODE DESCRIPTION

Ambient Operating Temperature Range :-55°C to + 125°C





Drawing Figure #

Figure	
Number	
2	

Electrical Characteristics

DCR Max	Rated Current mA	Z @ 4 MHz	
0.0013	20000	240	


Part Curves Page 2 of 3

Physical Dimensions


Α	В	С	C1	D	E	E1	Α	В	С		D	E	E1
mm	mm	mm	mm	mm	mm	mm	in	in	in	C1 in	in	in	in
14.48	10.03	9.32	12.90	4.06	2.54	3.43	0.570	0.395	0.367	0.508	0.160	0.100	0.135

Wire Dimensions

T1 mm	T2 mm	T3 mm	T1 in	T2 in	T3 in
3.12	0.76	0.76	0.123	0.030	0.030

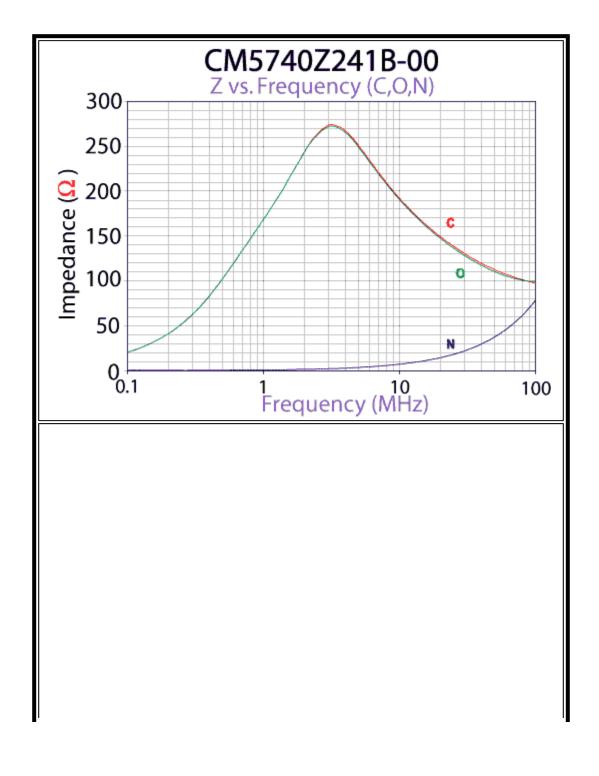

Part Curves Page 3 of 3

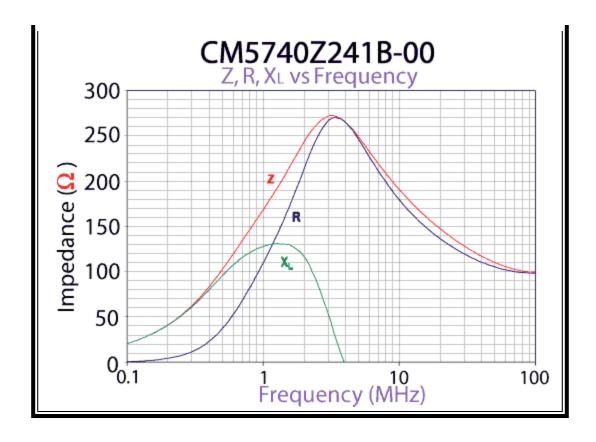

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com	mexico@steward.com	europe@steward.com	asia@stewa

Copyright© 2004 Steward, Inc.

Last Updated: 2/11/2004