

Steward

Advanced Ferrite Materials, EMI Suppression, and Inductive Products


[Home](#) • [Ferrite Product Lines](#) • [New Products](#) • [Technical](#) • [General](#) • [Contact](#) • [Steward Sales](#)

DA1206B601R-00

STEWARD PART NUMBERING SYSTEM

DA	1206	B	102	R	-	00
PRODUCT SERIES CODE	PART SIZE CODE	RATED CURRENT CODE	IMPEDANCE VALUE CODE	PACKAGING CODE		ADDITIONAL DESCRIPTION

Ambient Operating Temperature Range :-55°C to + 125°C

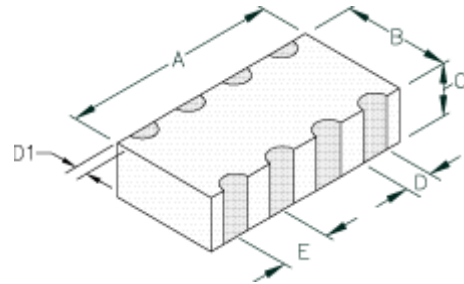

Drawing Figure


Figure Number
0


Electrical Characteristics

NET Z @ 100 MHz	DCR Max	Rated Current mA
600	0.60	200

Physical Dimensions

A mm	B mm	C mm	D mm	D1 mm	E mm	A in	B in	C in	D in	D1 in	E in
3.20	1.60	0.80	0.40	0.20	0.80	0.126	0.063	0.031	0.016	0.008	0.031



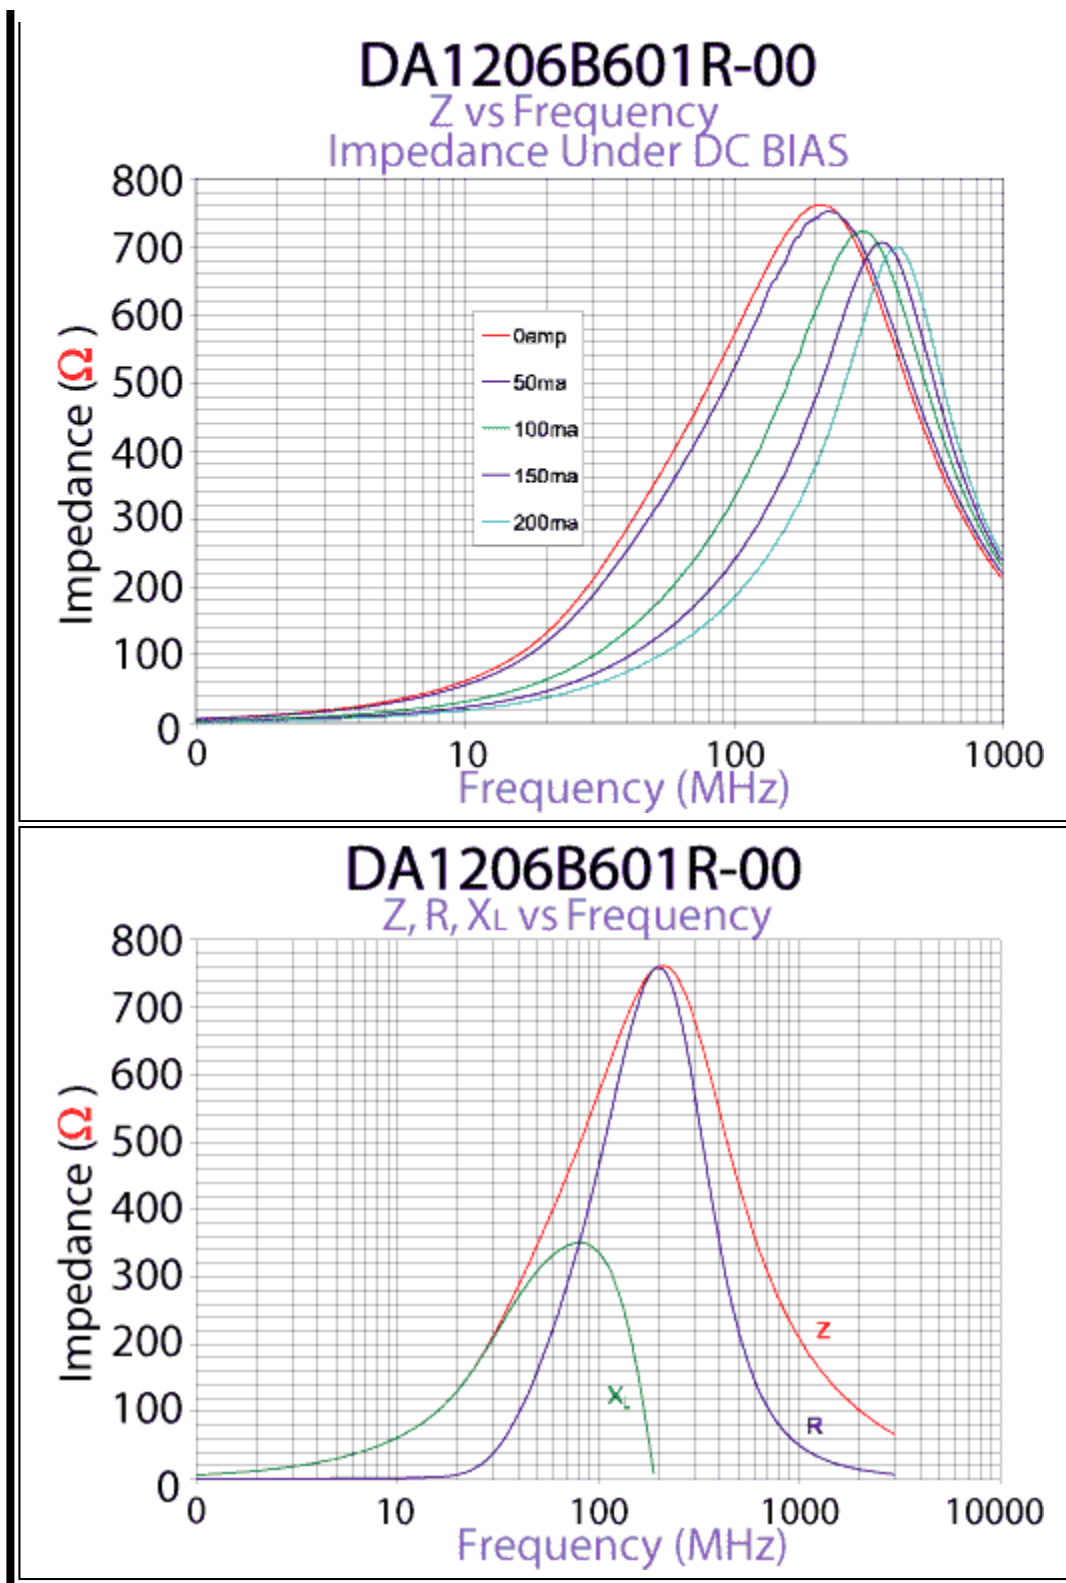

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.commexico@steward.comeuropa@steward.comasia@steward.com

Copyright© 2004 Steward, Inc.

Last Updated: 2/25/2004