

# **Grid Dish Parabolic Antenna GD5x**



#### 5150 TO 5850 MHz GRID DISH PARABOLIC ANTENNA

The 5 GHz parabolic grid directional antennas offered by Laird utilize a unique patented parabolic grid design with compact high performance feed. The antennas are constructed of welded steel wires which are galvanized and then powder coat painted with a light gray epoxy paint. The wire grid semi-parabolic design offers unsurpassed low wind loading while maintaining good RF performance. The compact low visual impact attractive styling blends well in almost any application. Mounting is simplified with the Laird bracket system made of galvanized steel with stainless steel hardware. The antenna comes with a bulkhead N female connector standard.


### FEATURES **FROHS**

- 22 dBi, 26 dBi, and 29 dBi models available
- Rugged and weatherproof
- Ultra low wind loading and low visual impact
- Vertical or horizontal polarization
- Type N female connector
- Super HD bracket models available for greater stability

# **MARKETS**

- 5 GHz wireless LAN applications
- Point-to-point backhaul
- WiMAX

### **ANTENNA PATTERNS**

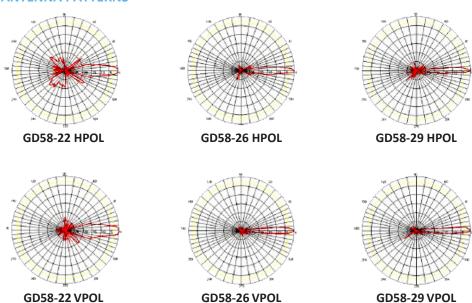

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com



# **Grid Dish Parabolic Antenna GD5x**



# **SPECIFICATIONS**

PARAMETER	GD5x-21	GD58-22	GD5x-25	GD58-26	GD5x-28	GD58-29	
Frequency range	GD57-21 5470-5725 MHz GD53-21 5150-5350 MHz	5725-5850 MHz	GD57-25 5470-5725 MHz GD53-25 5150-5350 MHz	5725-5850 MH	GD57-28 5470-5725 MHz z GD53-28 5150-5350 MHz	5725-5850 MHz	
Gain	21 dBi	22 dBi	25 dBi	26 dBi	28 dBi	29 dBi	
Horizontal beamwidt	h 10	)°	6	•	4	•	
Vertical beamwidth	11	11°		6°		6°	
Front to back	25	25 dB		30 dB		25 dB	
VSWR	1.5	1.5:1		1.5:1		1.5:1	
Impedance	50 o	50 ohm		50 ohm		50 ohm	
Input power	100 w	100 watts		100 watts		100 watts	
Operating temperatu	re -40° to	-40° to +70°C		-40° to +70°C		-40° to +70°C	
Pole size	1 to 2 in (25	1 to 2 in (25 to 50 mm)		1 to 2 in (25 to 50 mm)		1 to 2 in (25 to 50 mm)	
Weight	3 lbs (1	3 lbs (1.4 kg)		6 lbs (2.7 kg)		11 lbs (5 kg)	
Dimension (W x L)	11.8 x 15.7 ir	11.8 x 15.7 in (300 x 400		16.8 x 24 in (427 x 610		28.5 x 36 in (724 x 914	
Bracket tilt	mm)+/- 45°		mm)+/- 45°		mm)+/- 45°		

# WIND LOADING (LBS.)

MODEL	100 MPH	125 MPH	100 MPH WITH ½ IN RADIAL ICE
GD58-22	10 lbs	15.6 lbs	48 lbs
GD58-26	20 lbs	31 lbs	99 lbs
GD58-29	41 lbs	64 lbs	257 lbs

## **SYSTEM ORDERING**

GD58-22	5.7-5.8 GHz 22 dBi directional antenna	GD57-28 5.4-5.7 GHz 28 dBi directional
GD58-26	5.7-5.8 GHz 26 dBi directional antenna *	antenna * GD53-21 5.1-5.3 GHz 21 dBi
GD58-29	5.7-5.8 GHz 29 dBi directional antenna *	directional antenna GD53-25 5.1-5.3 GHz 25
GD57-21	5.4-5.7 GHz 21 dBi directional antenna	dBi directional antenna * GD53-28 5.1-5.3
GD57-25	5.4-5.7 GHz 25 dBi directional antenna *	GHz 28 dBi directional antenna *

#### **NOTES**

- All shipments F.O.B. Schaumburg, IL 60173
- \* Super HD bracket system now available for large and medium grid. Add "HD" as prefix to part number Example: HDGD58-29

Americas: +1.847 839.6907

IAS-Americas East Sales@lair dtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com

#### ANT-DS-GD5x 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall be laible for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Laird Laird Laird Logo, and other marks are trade marks or pressered trade marks or can affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.