

## 698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna



### MULTI-BAND DIRECT MOUNT OMNIDIRECTIONAL ANTENNA

The OC69271 antenna is a wide band omnidirectional antenna covering the domestic LTE700/ Cellular/ PCS/AWS/MDS, WiMAX 2300/2500, and global GSM900/GSM1800/UMTS/LTE2600 bands. The antenna can be used in both indoor and outdoor applications. It comes complete with mast mounting hardware and includes a UV stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

### FEATURES

- Applicable for both 3G and 4G solutions
- Domestic LTE 700 band and Global LTE 2600 band
- Domestic Cellular and Global GSM
- WiMAX 2300/2500/2600
- Weatherproof UV stable radome
- Mast mounting hardware included

### MARKETS

- Broadband wireless access service provider
- Campus, healthcare, or transportation terminals
- Stadium, industrial plants, and processing stations
- Low-to-medium density, tower mounted rural locations
- Public Safety Radio

PARAMETER	SPECIFICATION
Frequency	698 to 960 MHz, 1710 to 1990 MHz, 1920 to 2170 MHz, 2100 to 2500 MHz, 2500 to 2690 MHz
Gain	698 to 960 MHz - 1.5 dBi, 1710 to 2700 MHz - 3.5 dBi
Average Efficiency	698 to 960 MHz - 76%, 1710 to 2700 MHz - 87%
3 dB Beamwidth - E-plane	698 to 960 MHz - 81°, 1700 to 2200 MHz - 75°, 2500 to 2700 MHz - 100°
3 dB Beamwidth - H-plane	360°, Omnidirectional
Polarization	Linear, Vertical
Nominal Impedance	50 Ohms
VSWR	698 to 960 MHz - <2.5:1, 1710 to 2690 MHz - <2.0:1
Power	10 watts
RF Connector	N-type (M or F)
Mount Style	Mast/pole mount
Radome	Polycarbonate, UV, White
Material Substance Compliance	ROHS Compliant
Operating Temperature	-30°C to +70°C
Storage Temperature	-40°C to +85°C
Dimensional (H x OD)	248 x 24.5 mm (9.8" x 1")
Weight	156 g


### CONNECTORS

MODEL NUMBER	CONNECTOR
OC69271-FNM	Type N male
OC69271-FNF	Type N female

All antennas carry a 1-Year Warranty


# 698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna

## TYPICAL RADIATION PATTERNS

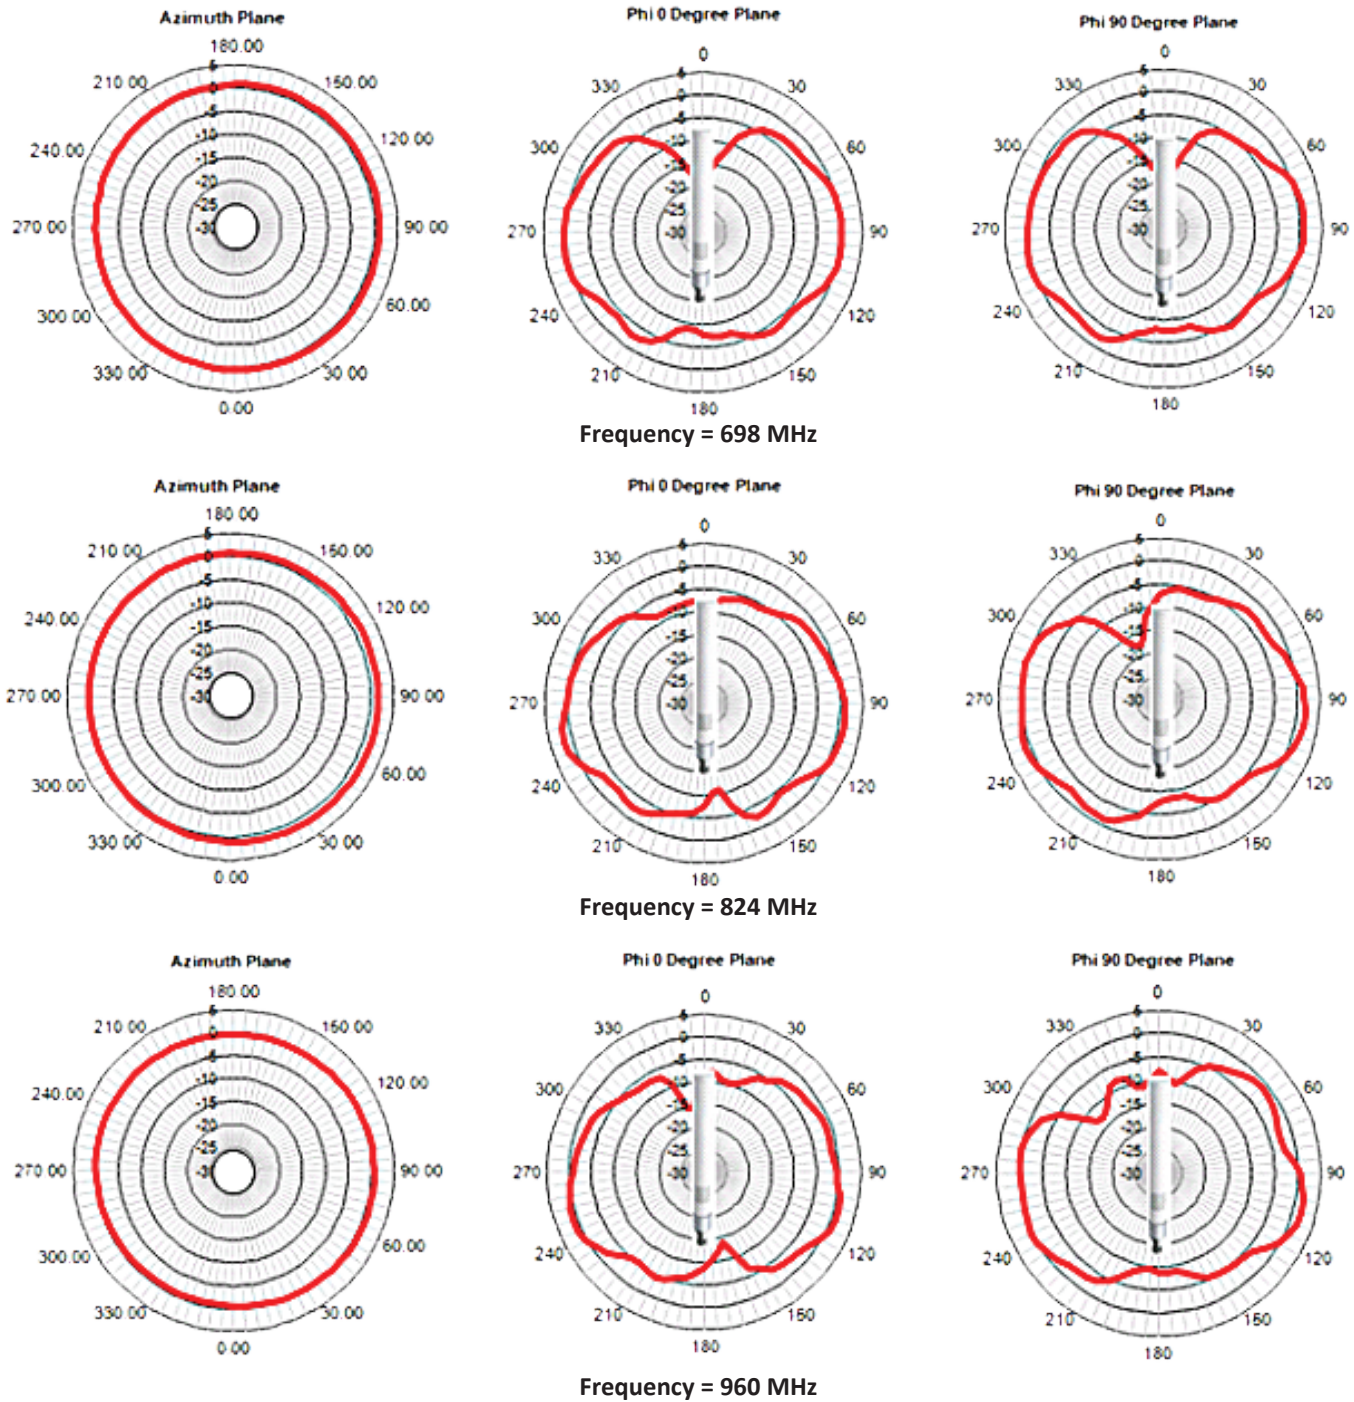


# 698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna

## TYPICAL RADIATION PATTERNS

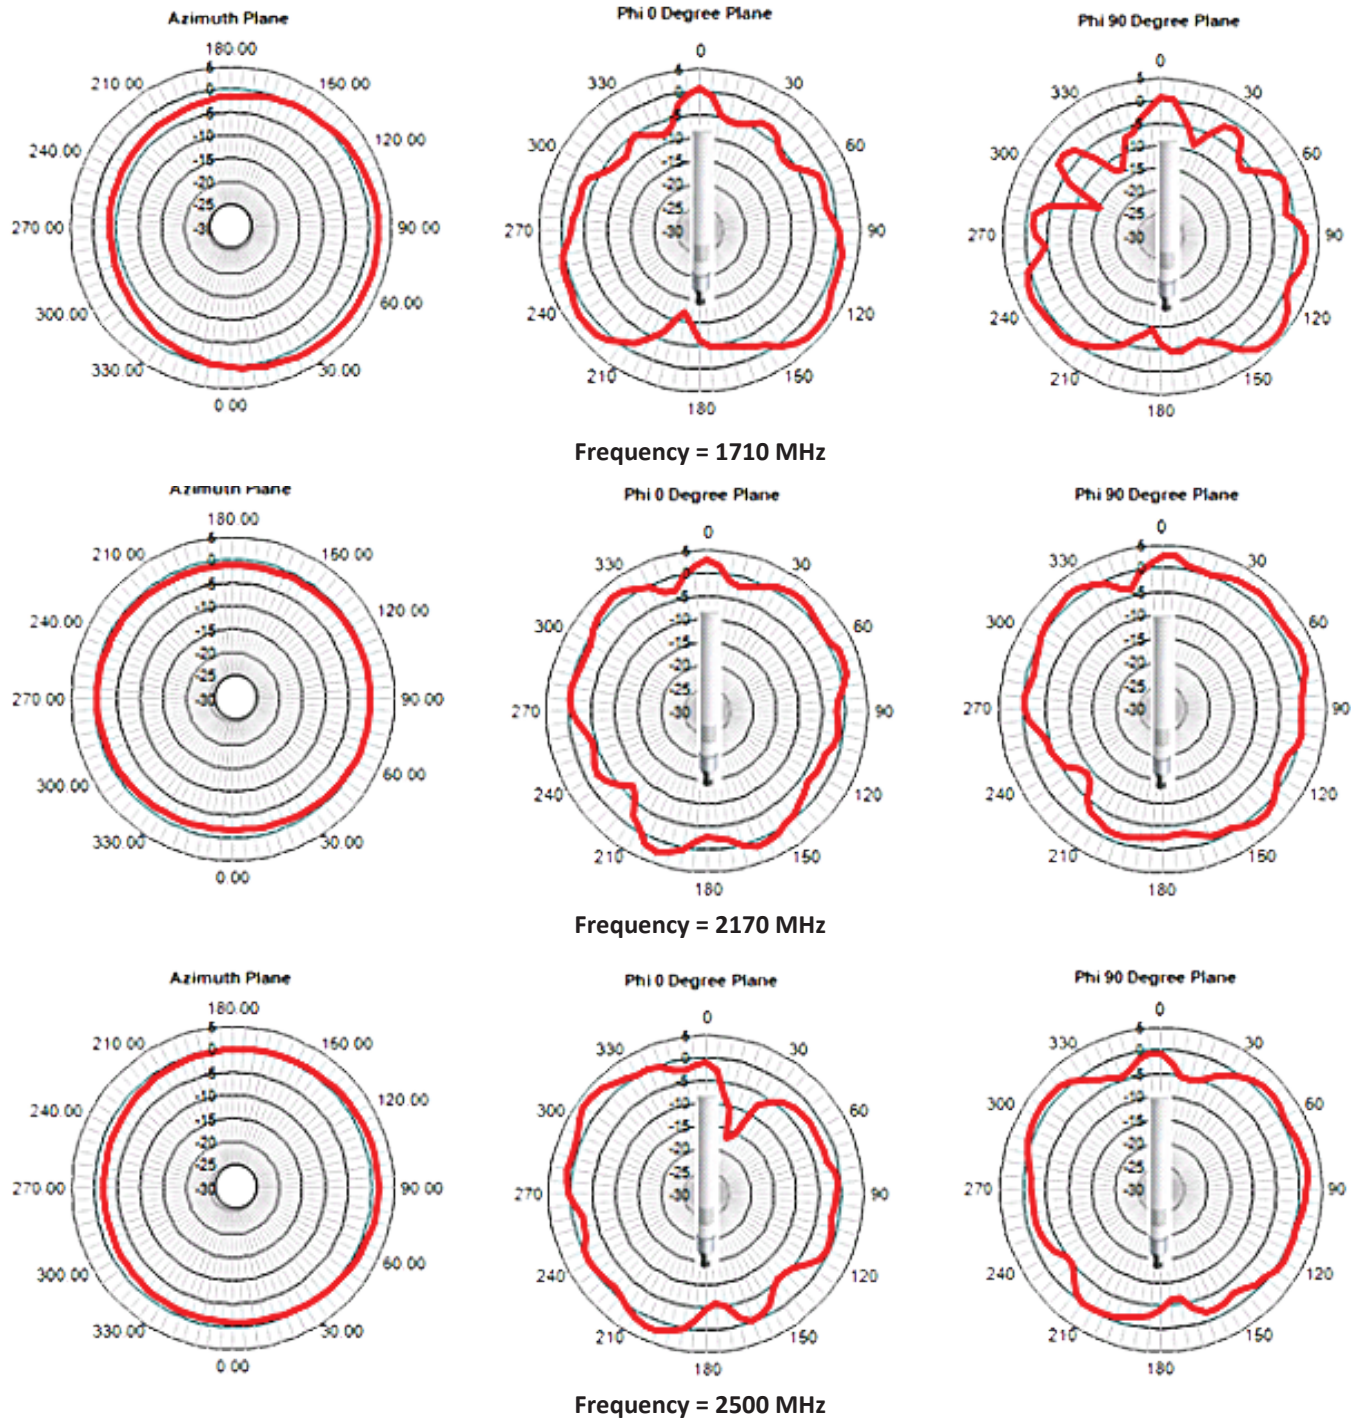

# 698-960 MHz/1710-2700 MHz LTE Direct Mount Omnidirectional Antenna

## TYPICAL RADIATION PATTERNS

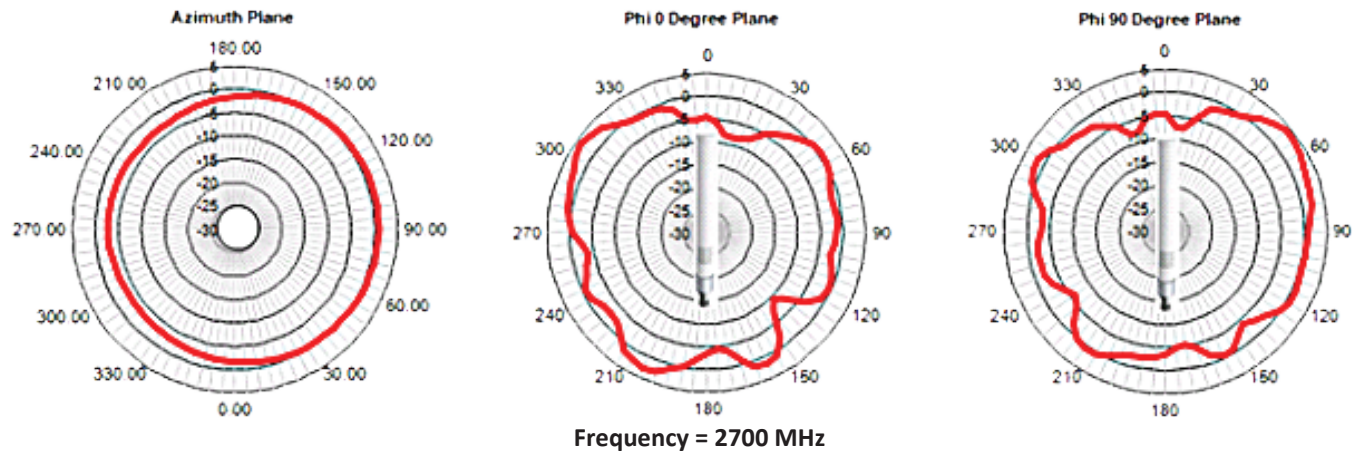

Americas: +1.847 839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

ANT-DS-OC69271 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.