

698-960 MHz/1710-2700 MHz Pole Mount Directional Panel Antenna



MULTI-BAND DIRECTIONAL PANEL ANTENNA

The PAS69278 antenna is a wide band dual port directional panel antenna with slant 45 polarization that covers the domestic LTE700/Cellular/PCS/AWS/MDS and global GSM900/GSM1800/UMTS/LTE2600 bands. The antenna is ideal for both indoor and outdoor applications. It includes a UV stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

FEATURES & BENEFITS

- Applicable for both 3G and 4G solutions
- Domestic LTE 700 band and Global LTE 2600 band
- WiMax 2300/2500 bands
- Domestic Cellular and Global GSM
- Weatherproof UV stable radome

- Wall mounting hardware included (optional mast mount kit available)

- Conformance to RoHS

APPLICATIONS

- Wireless Terminal, Point-of-Sale, Machine to Machine,
- Automatic Meter Reading and Home Security

SPECIFICATIONS

TYPICAL ELECTRICAL SPECIFICATIONS	
Frequency	698 – 960 MHz / 1710 – 2700 MHz
VSWR	2.0:1 Max.
Gain	698 – 960 MHz: 7.5 – 9.0 dBi, 1700 – 2700 MHz: 5.7 – 9.5 dBi
Average Efficiency	698 – 960 MHz: 80% - 87%, 1700 – 2700 MHz: 60% - 85%
3 dB Beamwidth (Vertical plane)	698 – 960 MHz: 55° – 70°, 1700 – 2700 MHz: 50° – 80°
3 dB Beamwidth (Horizontal plane)	698 – 960 MHz: 55° – 70°, 1700 – 2700 MHz: 50° – 80°
F/B Ratio , Co-pol	698 – 960 MHz: > 23 dB, 1700 – 2700 MHz: > 17 dB
Cross polarization, Axial	698 – 960 MHz: > 25 dB, 1700 – 2700 MHz: > 17 dB, typical 23 dB
Isolation	> 25 dB
Polarization	Slant ± 45o
Nominal Impedance	50 Ohms
Power	2 x 10 Watts
RF Connector	Dual Type N female
IP Class	IP55
Environmental Conditions	ETSI EN 300 019-2-4, class 4.1E.
Mount Style	Wall/Mast w/mounting hardware (Wall mount)
Radome and Base Plastic	UL94 V0 rated (UV resisted)
Radome & Base color:	White, Color code (SABIC) WH9B034
Material Substance Compliance	ROHS Compliant
Temperature	-40°C to +70°C
Dimensions	295 x 295 x 82 mm
Weight	1.46 kg

CABLES AND CONNECTORS

PART NUMBER	CABLE LENGTH	CONNECTOR
PAS69278-91NF	Dual 91 cm (36")	Dual Type N- Female
PAS69278-FNF	N/A (Direct connect)	Dual Type N- Female

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com




Europe: +44.(0).1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com




www.lairdtech.com

**698-960 MHz/1710-2700 MHz
Pole Mount Directional Panel Antenna**

TYPICAL RADIATION PATTERNS

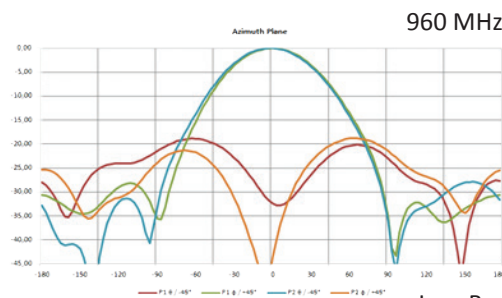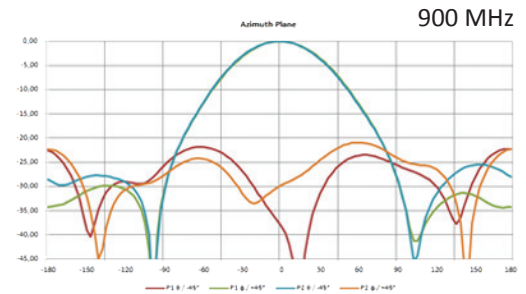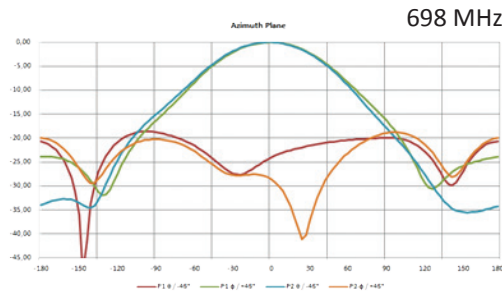

Low Band 698-960 MHz

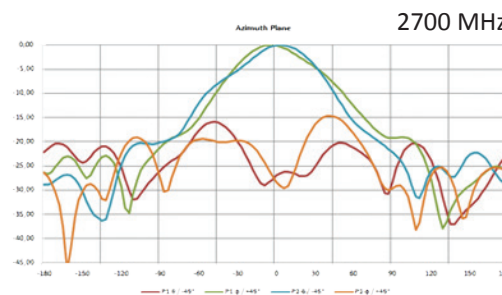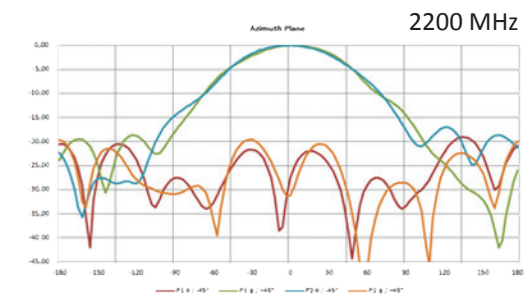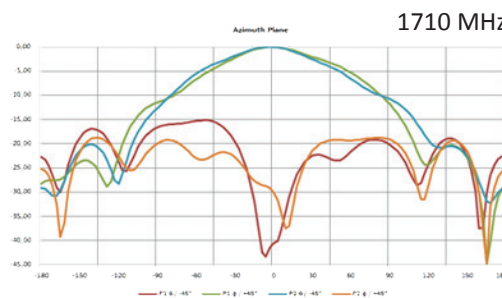

High Band 1710-2700 MHz

ANT-DS-PAS69278 090414

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2014 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.